

APPLICATIONS


The FHBF series is the workhorse of our high bay fluorescent series, designed especially for high light output. The fixtures uses premium mirrored reflectors for high efficiency lighting. A sturdy/durable fixturebody with superior appearance and appeal, suitable for commercial, retail and industrial applications. Mounts easily with chain or cable kit.

FEATURES & BENEFITS

- ◆ Four lamp positions
- ◆ Baked white enamel code gauge steel.
- ◆ Premium full specular mirrored reflector
- ◆ Multiple KOs and access plate
- ◆ 4 point chain mount
- ◆ White aluminum reflector available
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location

SPECIFICATIONS

Body and ends are die blanked, pierced and formed of 22 gauge cold rolled prime steel for rigidity and uniformity. Forming of the housing has been engineered to provide added strength along its entire length. This fixture is not designed to be surface mounted to the ceiling or wall. Listed by and bears **UL** label.

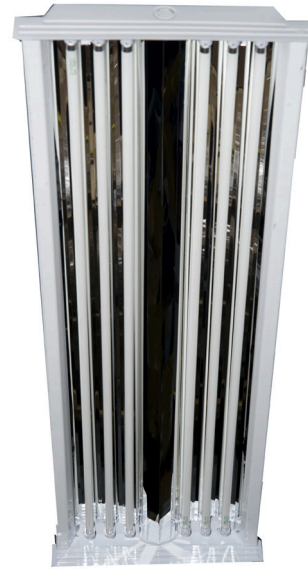

ORDERING DATA

EXAMPLE: FHBF-654WMV

FHBF		Length		Ballast Type		Options	
Series	# of Lamps	Length	Reflector Type	MV	120 - 277V	B1	T8/T5 1L 500 Lumens Battery Backup (B11)
FHBF	4 4 Lamp 6 6 Lamp	(Blank) 4' length TAN 8' length	Blank MIRO4 W Enhanced white aluminum	120	Electronic 120V	B2	T8/T5 1L/2L 700 Lumens Battery Backup (B48)
	Lamp Type			277	Electronic 277V	B3	T8/T5 1L/2L 1400 Lumens Battery Backup (B223)
	32 48" T8 32TAN 48" T8 tandem 54 46" T5HO 54TAN 46" T5HO tandem			R120	Resi Elec	B4	T8/T5 1L/2L 3000 Lumens Battery Backup (B510) *Remote mount only
				PMV	Program Start	B51	T5HO 1L 500 Lumens Battery Backup (B625)
				DMV	Sylvania Powersense Dimming	B52	T5HO 1L 800 Lumens Battery Backup (B585)
				LED**	1 End Hot Self driven LED Tube#	B53	T5HO 1L 1300 Lumens Battery Backup (B626)
				LED2**	2 End Hot Self driven LED Tube#	GR	Greenfield 3 Wire
					**Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps	GR1	Greenfield 4 Wire
						RIF	Radio interference filter
						SS	Integral Smart Sense
						OS	External Occupancy Sensor

*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

Sold on the side


A-FHBFWG - Wire Guard 4 or 6L Galv.
A-FHBFWG-WH - Wire Guard 4 or 6L White

Dimensions and specifications subject to change without notice.



DIMENSIONS

TOP VIEW

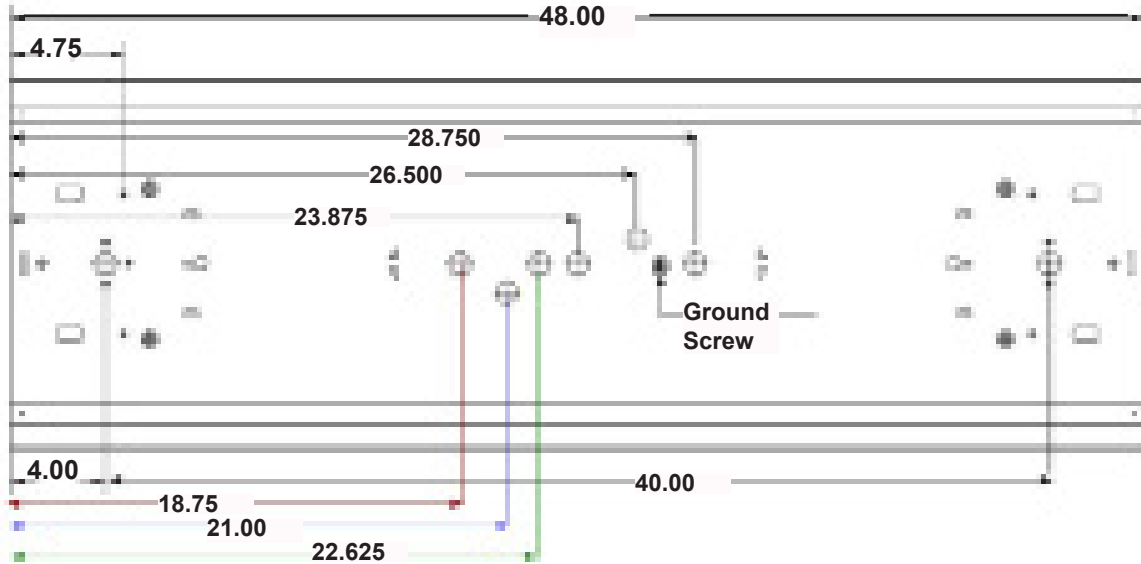

*Top of housing width is 11 5/8"

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE