



Surface Mount - Circle Drum

Series CIRDC

Height - 3"



Diameter - 13 3/4"

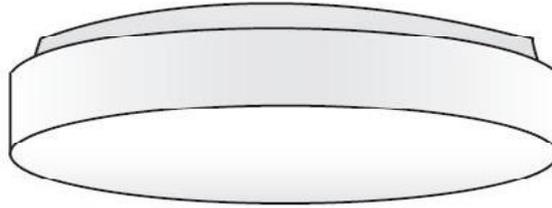

Application

The efficient and economical Decorative Circline is perfect for kitchens, hallways, laundry rooms, pantries, bathrooms and general work areas.

FEATURES & SPECIFICATIONS

Attributes

White opal acrylic bowl

Electrical

Normal power factor, U.L. approved ETL-CBM internally fused ballasts are standard on all circline lamped fixtures. Fixtures are wired for 110-120 volt, 60 cycle A.C. operation. Ballasts and wiring for other voltages and applications will be supplied when requested to meet specification. Fixtures bear U.L. labels.

Mounting

Ceiling mount

Diffuser

Translucent white acrylic diffuser.

Finish

Socket Plate White.

Listing

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.

Item Number	Dimensions (LxWxH)	Lamping
CIRDC122S	11.0" x 3.0"	FC8T9 (22W)
CIRDC2232S	14.0" x 3.0"	FC8 & FC12T9 (22 & 32W CIRC)
CIRDC3240S	18.0" x 3.0"	FC12 & FC16T9 (32 & 40W CIRC)
CIRDC113S	11.0" x 3.0"	1-Biax 13 Watt 4 Pin
CIRDC213S	11.0" x 3.0"	2-Biax 13 Watt 4 Pin
CIRDC313S	14.0" x 3.0"	3-Biax 13 Watt 4 Pin

CIRDC11L13W900L30K	11" x 3"	6 CREE LED 13W, 900 LUMENS, 3000K
CIRDC11L14W1350LD12030K	11" x 3"	6 CREE LED 14W, 1350 LUMENS, 3000K
CIRDC14L14W1350LD12030K	14" x 3"	8 CREE LED 14W, 1350 LUMENS, 3000K
CIRDC14L23W1850L30K	14" x 3"	8 CREE LED 23W, 1850 LUMENS, 3000K

L1800C LED Replacement Parts

L18C-DC-700-08-R = 8 CREE LED Array
IG1800-DMV-1 = LED Driver

*DATA per LM80/TM21 @ 1000MA Available upon request.

** Estimated for LED Source