



Texas Fluorescents  
Reinvented

# CWLXTE Series

Wet Location LED Exit Sign & Incandescent Combo



STANDARD | OPTIONAL



## ILLUMINATION

- Two fully adjustable 5.4W, glare-free incandescent lamp heads.
- High performance reflector and tempered glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Mounting hardware provided for back surface wall mount.

## HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.


## OPTIONS

- HTR: Optional internal heater for cold temperature applications.

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## DIMENSIONS

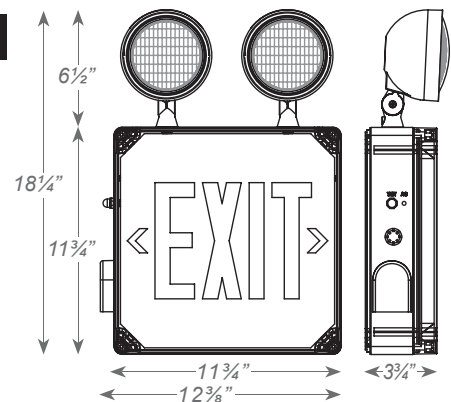

## ORDERING INFORMATION

Sample Part Number: **CWLXTE-1-R-EM**

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	BATTERY	OPTIONS
CWLXTE	1 Single Face	R Red G Green	EM Battery Backup (standard)	HTR Internal Heater

Saylite  
2055 Luna Rd. Suite 142 Carrollton, TX 75006  
Phone: 972-247-3171 Fax: 972-247-0200  
www.saylite.com email: sales@saylite.com

Catalog Number:
Notes:

**ELECTRICAL INFORMATION**

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CWLXTE	7.2	7.7	0.063	0.030

Catalog Number:
Notes: