

CATALOG#:
PROJECT:
TYPE:

Series HIL

LED Premium High Bay

High efficiency LED engineered for premium performance in medium and high ceiling applications ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces. A precision-formed reflector system available in highly reflective enhanced white reflector achieve maximum light output for ceilings from 15 feet to 40 feet. The unique arrangement is ideal for wide area lighting to put the light exactly where you need it with less fixtures. Based on ceiling height, these fixtures can replace an HID high bay using half of the wattage. Surface, pendant, chain or stem mounting. Highest quality materials and workmanship.

CONSTRUCTION

Housing is 22 gauge prepainted steel. Air vents surround the drivers in the back of the fixture to maximize LED and driver performance, reliability and life. High reflective enhanced white reflectors are computer designed to maximize photometric performance and put the light where you need it. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, cable kit and surface mount.

MOUNTING

Designed for surface, pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately

TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards. Contact factory for additional options.



DIMENSIONS

48L:

15.575"W x 45.160"L x 4.296"H 24L:

15.575"W x 23.379"L x 4.296"H

FEATURES & BENEFITS

- A sturdy/durable fixture body with superior appearance and appeal
- Ideal for commercial, retail and industrial applications
- Mounts easily with chain or cable kit
- Protected by an optional wire guard
- · Suitable for dry or damp locations
- >50,000 hrs of L70 LED life
- · CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty








Texas Fluorescents Reinvented

CATALOG#:	
PROJECT:	

Series HIL
LED Premium High Bay

DRAWINGS & IMAGES


End

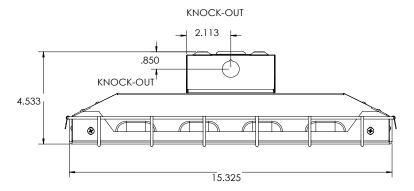


TYPE:



Back - 24"

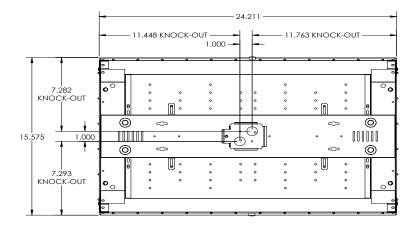

Back - 48"

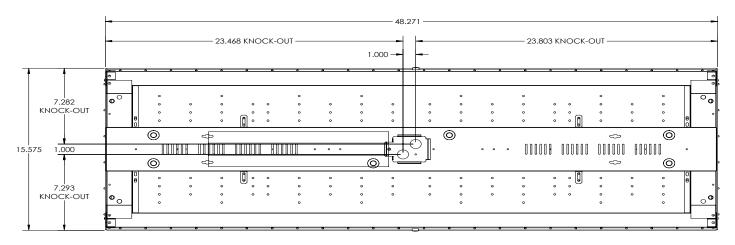



Texas Fluorescents Reinvented

CATALOG#:	S
PROJECT:	LE

Series HIL LED Premium High Bay

ORDER INFORMATION

TYPE:

ORDER INFORMATION			OF	750	WATTACE & LUMENO		DDTVED		001.00	
SERIES	LEI	LENS MATERIAL		ZES	WATTAGE & LUMENS		DRIVER		COLOR	
HIL	Blank FR CL	No lens Frosted Smooth Acrylic Clear lens	24L	24"	A80W10000L	80 Watts 10000 Lumens	DMV	0-10V Dimming		3000K 3500K 4000K 5000K
					A122W15000L	122 Watts 15000 Lumens				
			48L	48"	A80W10000L	80 Watts 10000 Lumens				
					A122W15000L	122 Watts 15000 Lumens				
					A149W20000L	149 Watts 20000 Lumens				
					A175W25000L	175 Watts 25000 Lumens				
					A215W30000L	215 Watts 30000 Lumens				
					A220W32500L	220 Watts 32500 Lumens				
					A260W35000L	260 Watts 35000 Lumens				
					A280W40000L	280 Watts 40000 Lumens				
					A315W45000L	315 Watts 45000 Lumens				
					A355W50000L	355 Watts 50000 Lumens				
					A400W55000L	400 Watts 55000 Lumens				
					A433W60000L	433 Watts 60000 Lumens				
					*	*				

OPTIONS

MDT4 Occupancy Sensor Wide Angle				
MDF4	Occupancy Sensor and Daylight			
cs	5-15P 120V 8ft Cord & Plug			
CS12 L7-15P 277V 8ft Cord & Plug				
CS08 8ft Cord No Plug				
WP	6ft 3 Wire, Whip			
WP10 6ft 4 Wire, Whip				
EM	10W, 90 mins, 120-277VAC			
WG	Wire Guard			
LSXR610(xx)	Occupancy Sensor (Full On and Steps to XX% Level)			

Note

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

^{*}Programmable LED drivers allow custom configured wattages and corresponding lumens.



Reinvented

CATALOG#:		

Series HIL
LED Premium High Bay

TYPE:

PROJECT:

Model No.

HIL48LA175W25000LDMVxxx40Koooo

HIL48LA175W25000LDMVxxx50Koooo

HIL48LA215W30000LDMVxxx50Koooo

HIL48LA280W40000LDMVxxx50Koooo

HIL48LA355W50000LDMVxxx40Koooo

HIL48LA220W32500LDMVxxx50Koooo

HIL48LA355W50000LDMVxxx50Koooo

HIL48LA215W30000LDMVxxx35Koooo

HIL48LA280W40000LDMVxxx30Koooo

HIL48LA175W25000LDMVxxx35Koooo

HIL48LA280W40000LDMVxxx35Koooo

HIL48LA355W50000LDMVxxx35Koooo

HIL48LA260W35000LDMVxxx40Koooo

HIL48LA315W45000LDMVxxx40Koooo

HIL48LA175W25000LDMVxxx30Koooo

HIL48LA355W50000LDMVxxx30Koooo

HIL48LA260W35000LDMVxxx30Koooo

HIL48LA260W35000LDMVxxx35Koooo

HIL48LA315W45000LDMVxxx35Koooo

HIL48LA215W30000LDMVxxx40Koooo

HIL48LA220W32500LDMVxxx40Koooo

HIL48LA260W35000LDMVxxx50Koooo

HIL48LA215W30000LDMVxxx30Koooo

HIL48LA220W32500LDMVxxx30Koooo

HIL48LA315W45000LDMVxxx30Koooo

HIL48LA220W32500LDMVxxx35Koooo

HIL48LA280W40000LDMVxxx40Koooo

HIL48LA315W45000LDMVxxx50Koooo

