

# Series KDS

## LED Open Strip (1.62" Wide)

Specification grade, mini-body open strip for size-critical applications such as display cabinets, coves and other areas where space is at a premium.

### CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back, side, and end of housing. Ballast covers or reflectors attach without tools to simplify ballast access.

### MOUNTING

Surface mount.

### TYPICAL OPTIONS & ACCESSORIES

Whips, fuses and cord sets. Emergency battery backup option available. Four standard Kelvin temperatures, with optional RGBW available. Contact factory for more details.



### DIMENSIONS

48L - 48"L x 1.62"W x 1.38H"  
96L - 96"L x 1.62"W x 1.38H"

### FEATURES & BENEFITS

- Single unit length and tandem length fixtures available
- W3x, economical white steel reflectors, for abusive locations
- M2, premium full specular (mirrored) reflectors, for maximum efficiency
- Two styles: symmetric and asymmetric
- Multiple lumen packages/wattages through use of programmable LED drivers
- 4000K color temperature; optional RGBW available
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Emergency battery backup available
- Dimming: 0-10V 120-277V standard, 120V ELV/TRIAC optional
- Power factor >0.90
- 5 year warranty



CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

# Series KDS

LED Open Strip (1.62" Wide)

## ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENGTH	WATTAGE* & LUMENS*	REFLECTORS	DRIVER	COLOR/CRI**	
KDS LED Mini Body Strip	48L 24"	J24W2800L	Blank No reflector	DMV	0-10V Dimming	30K 3000K 80 CRI
		J28W3200L	W30 White steel reflector Standard mount	G120	ELV/TRIAC Dimming at 120V only	35K 3500K 80 CRI
		J35W4000L		D1MV	0-10V Dimming (dim to 1%)	40K 4000K 80 CRI
	96L 96"	J48W5650L		DMV(xx)	0-10V Dimming	50K 5000K 80 CRI
		J57W6400L				930K 3000K 90 CRI
		J72W8000L				935K 3500K 90 CRI 940K 4000K 90 CRI 950K 5000K 90 CRI



### OPTIONS

- WP 6ft. 3 wire  
18 gauge whip
- CS 8ft. 3/18 3prong (5-15P) cord & plug


Note:  
 \*Programmable LED drivers allow custom configured wattages and corresponding lumens.  
 \*\* Consult factory for 90 CRI 5000K availability.  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

**DRAWINGS & IMAGES**

**END**

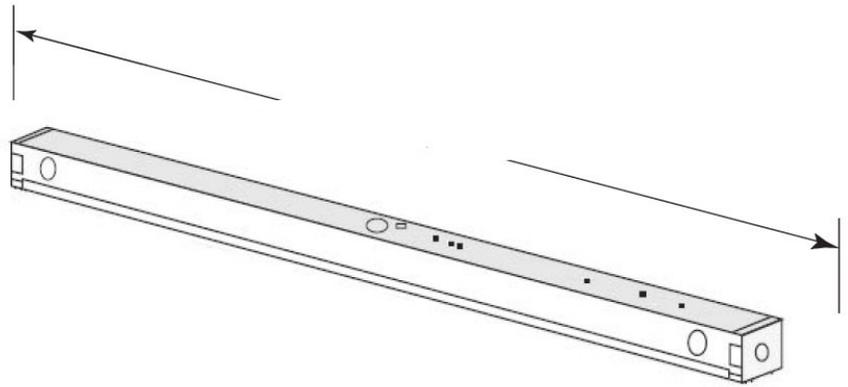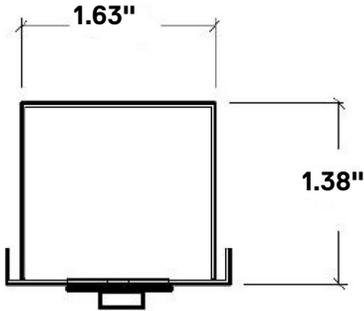

**Style 0**

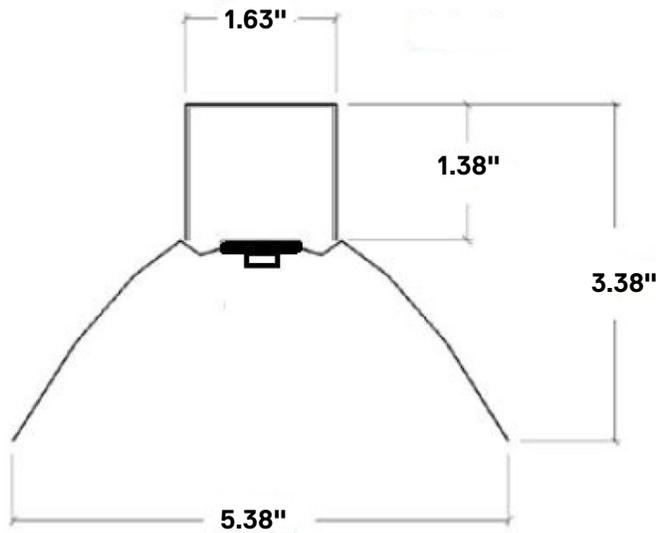

**Style 5**

