

LPC Series

LED PUFF LOW PROFILE CLOUD FIXTURE

FEATURES & SPECIFICATIONS

INTENDED USE

A puff of light to illuminate the most discriminating office or home. A shallow contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels. For Dry and Damp Location.


SIZE W x L x H in inches

24L: 9.24W x 26.75L x 3.2Dp

48L: 9.25W x 49.75L x 3.20Dp

CONSTRUCTION

All metal parts die formed from heavy gauge cold roll steel housing spot welded to insure uniformity and dimensional stability.

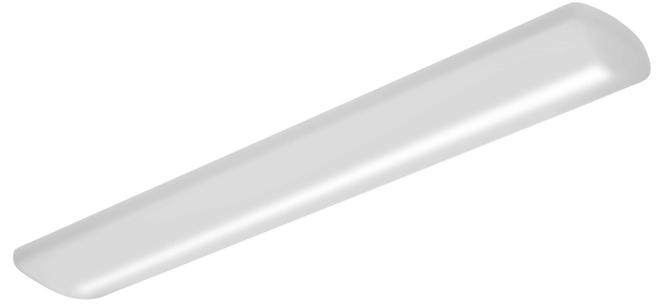

DIFFUSER

Custom compounded LED Frosted Acrylic Sheet .110" thick provides smooth general lighting with LED arrays with no pixelation. Added Impact Modifier in the acrylic enhances the durability.

ORDERING INFORMATION

Example: LPC48LQ41W4200LG12040K

LPC	24L	Q41W4200L	G120	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
LPC LED PUFF LOW PROFILE CLOUD FIXTURE	24L 24" Length	V24W2200L 24 System Watts, 2182 Delivered Lumens	G120 120V Triac Dimming	30K 3000K
	48L 49.75" Length	Q41W4200L 41 System Watts, 4200 Delivered Lumens		40K 4000K

*Consult for more options

Catalog Number:
Notes: