



CATALOG#: _____
PROJECT: _____
TYPE: _____

Series ITB

LED Linear Open Channel

This value-priced recessed channel outperforms typical troffers and strip fixtures by maximizing comfortable, glare-free light levels for general merchandising environments. Available for individual or continuous runs (with no additional parts required).

CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel.

MOUNTING

For recessed mounting in all T-grid ceiling types, 1" or 9/16" grid sizes. Preferred ceiling to have main tees on one-foot centers with cross tees at 4ft. or 8ft. spacing depending on modules used. All units are designed for individual or row mounting; no additional parts needed. Each full end plate has auxiliary suspension points to facilitate supporting to permanent building structures.

TYPICAL OPTIONS & ACCESSORIES

Four lumen packages/wattages are offered. Emergency battery backup capability available.



DIMENSIONS

48L- 47.96"L x 11.71"W x 5.45"H
96L- 95.92"L x 11.71"W x 5.45"H

FEATURES & BENEFITS

- Individual fixture or continuous row mounting (with no additional parts required)
- Post painted powder coat finish in standard white
- Multiple lumen packages/wattages
- 3000K, 3500K, 4000K or 5000K color temperatures
- 80 or 90 CRI
- 50,000 hrs of L70 LED life
- 0-10 volts dimmable 120-277V
- Power factor 0.99
- 5 year warranty





CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series ITB

LED Linear Open Channel

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	SIZE	WATTAGE* & LUMENS*	DRIVER	COLOR	OPTIONS
ITB	48L 48"	T23W3000L 23 Watts 3000 Lumens	DMV 0-10V Dimming	30K 3000K 80 CRI	EM Integrated 10W Emergency battery backup (excludes 1x4, 1x2 and 1x1)
		T48W6300L 48 Watts 6300 Lumens		35K 3500K 80 CRI	EM12 Integrated 12W Emergency battery backup
ITB	96L 96"	T48W6300L 48 Watts 6300 Lumens	DMV 0-10V Dimming	40K 4000K 80 CRI	EM14 Integrated 14W Emergency battery backup
		T85W11000L 85 Watts 11000 Lumens		50K 5000K 80 CRI	EM20 20W Emergency battery backup (remote only)
				930K 3000K 90 CRI	
				935K 3500K 90 CRI	
				940K 4000K 90 CRI	
		950K 5000K 90 CRI			

Note:



*Programmable LED drivers allow custom configured wattages and corresponding lumens.

** Consult factory for 90CRI 5000K availability

We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

48L

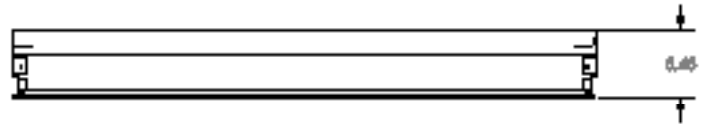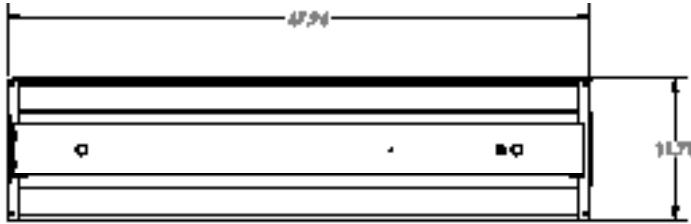

96L



END

