



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series LPC

LED Surface Mount Lowest Profile Cloud Fixture

A 3.2 deep, contemporary, opal acrylic diffuser, softly and evenly distributes light and creates a subtle "cloud" effect on the ceiling. Ideal for modern, upscale, dry or damp applications.

CONSTRUCTION


All metal parts that are die-formed from heavy gauge, cold-roll steel. The housing is spot-welded to insure uniformity and dimensional stability.

DIFFUSER

Custom-compounded, frosted acrylic sheet of .110" thickness provides smooth, general lighting for LED arrays with no pixelation. An impact modifier added to the acrylic enhances its durability.

MOUNT

Surface mount

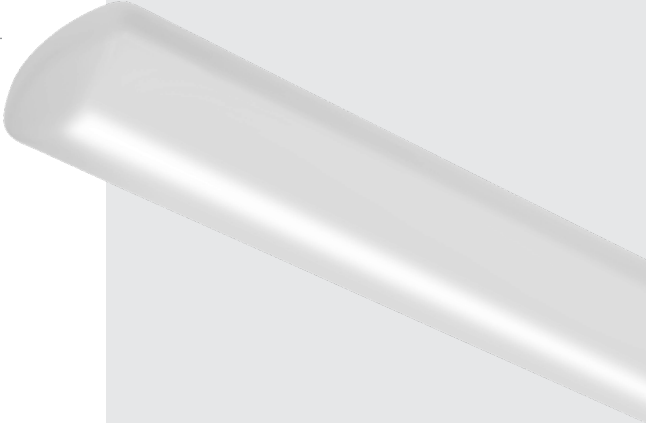

DIMENSIONS

24L - 26.75" L x 9.24" W x 3.2" H
48L - 49.75" L x 9.25" W x 3.2" H

FEATURES & BENEFITS

- A puff of light to illuminate the most discriminating office or home
- A shallow contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V standard, 120 ELV/TRIAC optional
- Power factor >0.90
- Suitable for dry and damp locations
- 5 year warranty



ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

W L



SERIES	LENS MATERIAL	LENGTH	WATTAGE* & LUMENS*	DRIVER	COLOR	CRI**
LPC LED Puff Low Profile Cloud Fixture	MW Matte white acrylic	24L 26.75"	S20W2250L 20 Watts 2250 Lumens	DMV 0-10 V Dimming	30K 3000K	Blank 80 CRI
			S24W2600L 24 Watts 2600 Lumens	G120 ELV/TRIAC Dimming at 120V only	35K 3500K	90 90 CRI
			S28W3000L 28 Watts 3000 Lumens	D1MV 0-10 V Dimming (dim to 1%)	40K 4000K	
		48L 49.75"	S40W4550L 40 Watts 4550 Lumens		50K 5000K	
			S48W5200L 48 Watts 5200 Lumens			
			S57W6050L 57 Watts 6050 Lumens			

DRAWINGS & IMAGES


Back

End

2 Ft

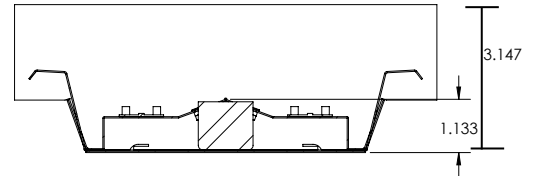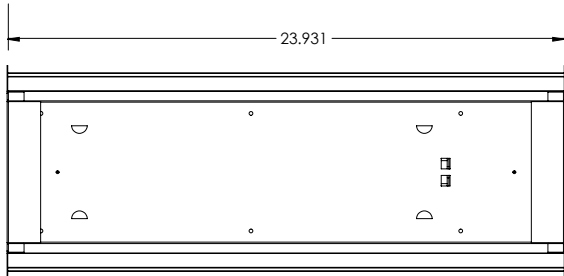

4 Ft

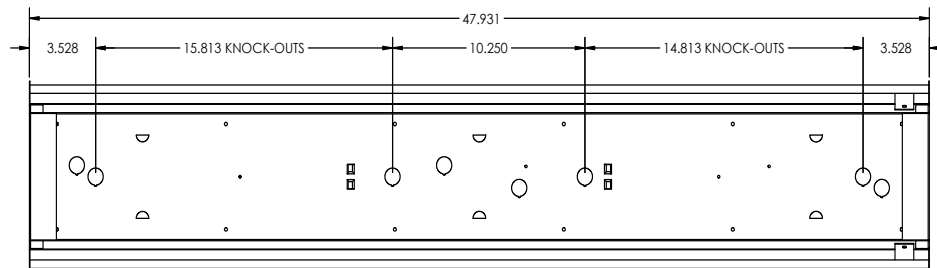

Note:
*Programmable LED drivers allow custom configured wattages and corresponding lumens.
** Consult factory for 90 CRI 5000K availability.
We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.