



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series MIND

MEZZANINE LED FIXTURE

Specially designed for dense mezzanine applications, this shallow, robust linear fixture features a remote driver to easily install to the bottom of the floor above and to withstand the vibration of overhead activity.

CONSTRUCTION

The housing is die-formed from cold-rolled 22-gauge steel. The finish is high reflectance baked white enamel. A versatile end plate doubles as coupler for continuous row mounting, and the reflector is one single piece. Knockouts on back and end of housing are provided for flexible conduit attachment.

MOUNTING

Surface mount, chain hung, double stem.

TYPICAL OPTIONS & ACCESSORIES

Whips, fuses, wire guards and "EM" - emergency battery backup. Contact factory for more details.



DIMENSIONS

48L - 48.0"L x 4.25"W x 2"H
96L - 96.0"L x 4.25"W x 2"H

FEATURES & BENEFITS

- Surface, chain or stem mountable
- Variety of lumen packages/ wattages through use of programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K); for RGBW option, consult factory
- Suitable for dry or damp locations
- CRI >80 standard, 90 optional
- L70: >50,000 hrs
- Dimming 0-10V 120-277V standard, 120 ELV/TRIAC optional
- Power factor 0.90
- Emergency battery backup available
- 5 year warranty



ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.



SERIES	LENGTH	WATTAGE* & LUMENS*		DRIVER		COLOR/CRI**	
MIND MEZZANINE LED FIXTURE	24L 24"	F24W3350L	24 Watts 3350 Lumens	DMV	0-10V Dimming	30K	3000K 80 CRI
		F30W3900L	30 Watts 3900 Lumens	G120	ELV/TRIAC Dimming at 120V only	35K	3500K 80 CRI
	48L 48"	F35W4900L	35 Watts 4900 Lumens	D1MV	0-10V Dimming (dim to 1%)	40K	4000K 80 CRI
		F48W6500L	48 Watts 6500 Lumens			50K	5000K 80 CRI
		F57W7800L	57 Watts 7800 Lumens			930K	3000K 90 CRI
	96L 96"	F70W9800L	70 Watts 9800 Lumens			935K	3500K 90 CRI
		F97W13000L	97 Watts 13000 Lumens			940K	4000K 90 CRI
		F118W15500L	118 Watts 15500 Lumens			950K	5000K 90 CRI

OPTIONS	
EM	10W Emergency battery backup (internal, excludes less than 4ft.)
EM12	12W Emergency battery backup (remote only)
EM20	20W Emergency batter backup (remote only)

Note:
*Programmable LED drivers allow custom configured wattages and corresponding lumens.
** Consult factory for 90 CRI 5000K availability.
We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

PHOTOMETRICS



MIND48LF48W6500LDMV40K

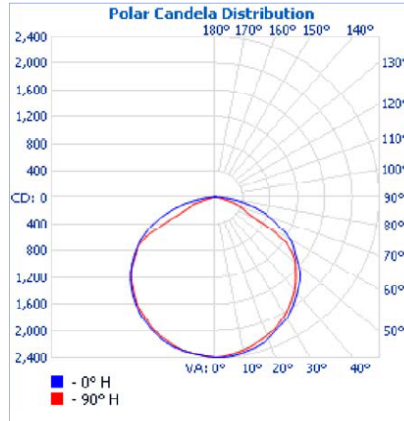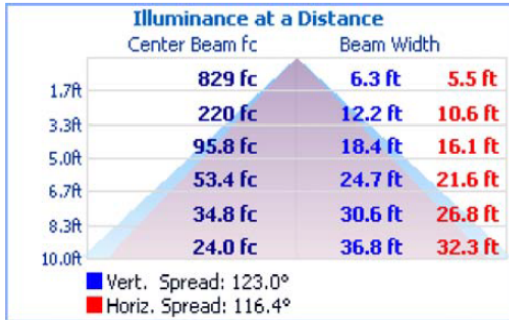

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	1,868.6	27.1%
0-40	3,092.5	44.9%
0-60	5,638.1	81.9%
60-90	1,249.8	18.1%
70-100	395.4	5.7%
90-120	0.3	0%
0-90	6,887.9	100%
90-180	0.3	0%
0-180	6,888.2	100%

IND96LF97W13000LDMV40K

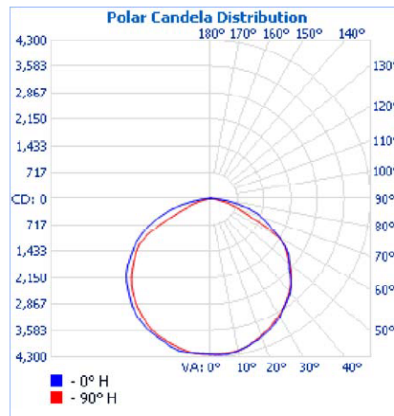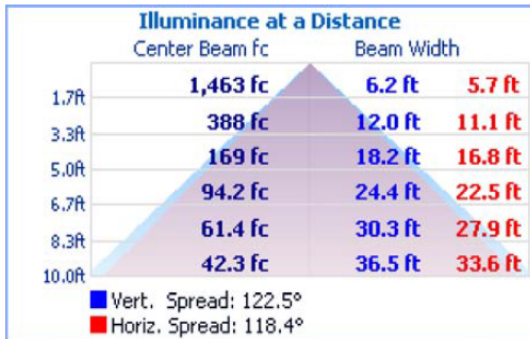

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	3,341.6	27%
0-40	5,526.1	44.6%
0-60	10,039.3	81.1%
60-90	2,342.5	18.9%
70-100	760.2	6.1%
90-120	0.6	0%
0-90	12,381.8	100%
90-180	0.6	0%
0-180	12,382.4	100%