



CATALOG#:

PROJECT:

TYPE:

# Series 555

## LED Ceiling/Wall Mount Luminaire

Series 555 Linear Wall Mount fixtures are stylish luminaires designed for baths, kitchens, recreation rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities, in displays and more.

### CONSTRUCTION

All metal parts are die-formed from heavy gauge cold rolled steel with overlapping end caps to insure uniformity and dimensional stability. Clear prismatic or smooth white acrylic lens offered.

### MOUNTING

Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

### TYPICAL OPTIONS & ACCESSORIES

Custom finishes, internal divider, front baffle, pull chains, convenience outlets. Contact factory for custom options.

### DIMENSIONS

2 ft - 24.46"L x 4.52"W x 4.37"H

4 ft - 48"L x 4.52"W x 4.37"H

### FEATURES & BENEFITS

- White, black or chrome finishes available
- Clear prismatic or smooth white acrylic lens offered
- Multiple lumen packages (3000K, 3500K, 4000K, 5000K); consult factory for RGBW option
- Variety of lumen packages and wattages through use of programmable drivers
- Emergency battery backup available
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V standard, 120 ELV/TRIAC optional
- Power factor >0.90
- Suitable for dry and damp locations
- 5 year warranty





CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

# Series 555

LED Ceiling/Wall Mount  
Luminaire

## ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENS MATERIAL		LENGTH		WATTAGE* & LUMENS*		DIVIDER/FRONT SHIELD		DRIVER	
555	A	Clear prismatic acrylic	24L	24"	F24W2900L	24 Watts 2900 Lumens	Blank	No divider	DMV	0-10V Dimming
	MW	Smooth white acrylic			F28W3200L	28 Watts 3200 Lumens	D	Divider only	G120	ELV/TRIAC Dimming at 120V only
					F35W4000L	35 Watts 4000 Lumens	F	Front shield only	D1MV	0-10V Dimming (dim to 1%)
					48L	48"	F30W4100L	30 Watts 4100 Lumens	T	Top shield only
			F48W6000L	48 Watts 6000 Lumens			DF	Divider & front shield		
	F57W6900L	57 Watts 6900 Lumens	TF	Top & front shield						
	H72W8800L	72 Watts 8800 Lumens								

COLOR/CRI**		FINISH		OPTIONS	
30K	3000K 80 CRI	WH	White	SW2	Pull chain, 2 way switching (Use with single ballasts)
35K	3500K 80 CRI	CH	Chrome finish	GCO	Ground convenience outlet (North American 3 prong)
40K	4000K 80 CRI	CHEND	Chrome finish on end caps only	EM	10W Emergency battery backup
50K	5000K 80 CRI	BK	Black	EM12	12W Emergency battery backup
930K	3000K 90 CRI			EM20	20W Emergency battery backup (remote only)
935K	3500K 90 CRI				
940K	4000K 90 CRI				
950K	5000K 90 CRI				

Note:

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.



\*\* Consult factory for 90 CRI 5000K availability.

We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.


**DRAWINGS & IMAGES**

**Back  
 2 ft.**

**End**

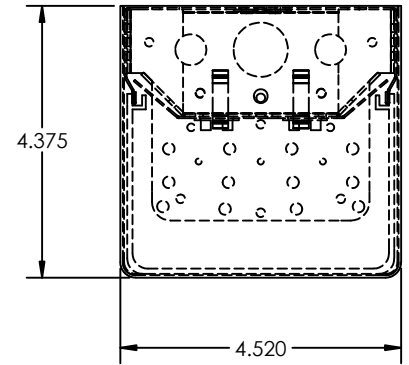
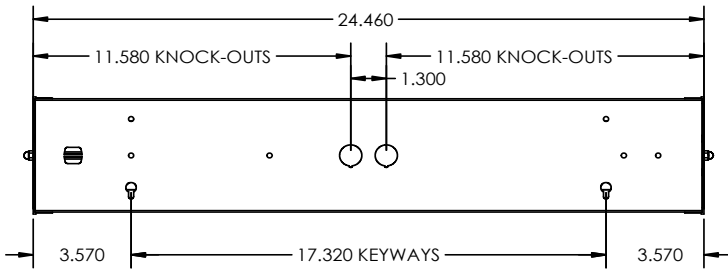


**4 ft.**

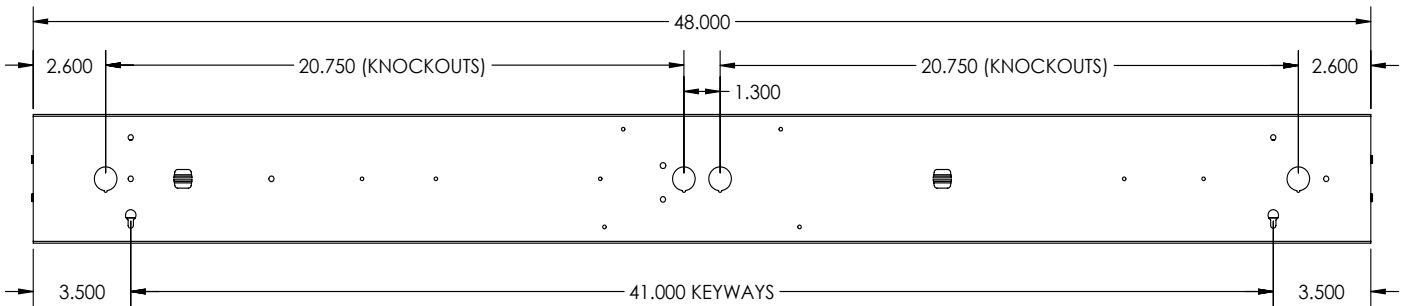

**PHOTOMETRICS**



**2 FT - 555A24LF24W2900LDMV40K**

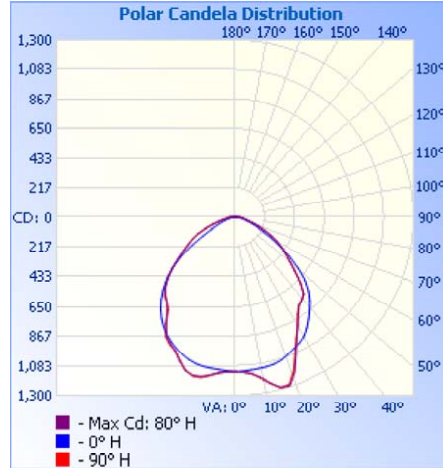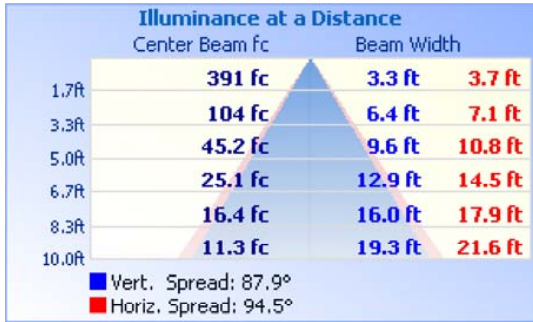

**Zonal Lumen Summary**

Zone	Lumens	%Luminaire
0-30	937.5	32.4%
0-40	1,490.0	51.6%
0-60	2,450.3	84.6%
60-90	432.7	14.9%
70-100	190.1	6.6%
90-120	13.1	0.5%
0-90	2,882.9	99.5%
90-180	13.1	0.5%
0-180	2,896.0	100%

**4 FT - 555A48LF48W6000LDMV40K**

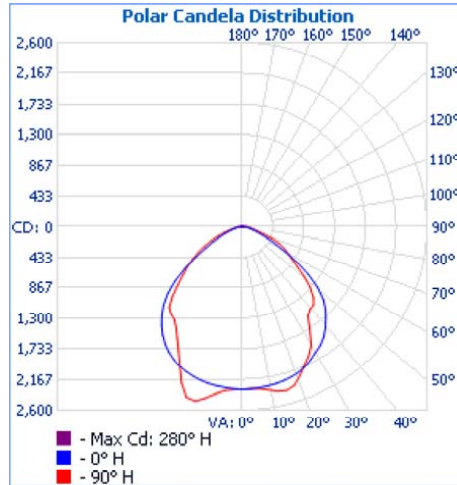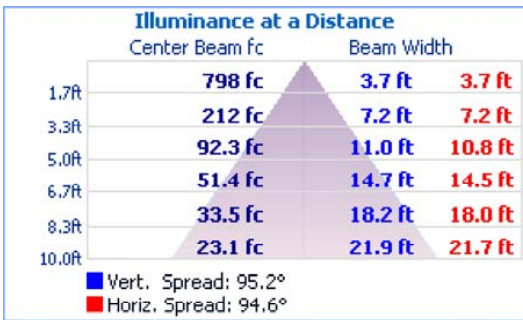

**Zonal Lumen Summary**

Zone	Lumens	%Luminaire
0-30	1,903.5	32.4%
0-40	3,041.8	51.7%
0-60	5,016.8	85.3%
60-90	846.4	14.4%
70-100	347.9	5.9%
90-120	20.4	0.3%
0-90	5,863.2	99.7%
90-180	20.4	0.3%
0-180	5,883.5	100%



CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

Series 555  
LED Ceiling/Wall Mount  
Luminaire

## ORDER INFORMATION



### DLC Listed Items

ITEM NUMBER
555A48LF30W4100LDMV30K
555A48LF30W4100LDMV35K
555A48LF30W4100LDMV40K
555A48LF30W4100LDMV50K
555A48LF48W6000LDMV30K
555A48LF48W6000LDMV35K
555A48LF48W6000LDMV40K
555A48LF48W6000LDMV50K
555A48LF57W6900LDMV30K
555A48LF57W6900LDMV35K
555A48LF57W6900LDMV40K
555A48LF57W6900LDMV50K