



CATALOG#: _____
PROJECT: _____
TYPE: _____

Series CLM

LED Surface Wraparound Cloud

Premium-grade, contemporary, designer, shallow, surface-mounted, wraparound luminaire. For use in indoor applications where aesthetics and quality are important, such as kitchens, recreation rooms, nursing homes, retail stores, and office areas. Regressed housing provides a floating appearance.

CONSTRUCTION

Die-formed, 22-gauge cold-rolled steel housing. Spot-welded for rigidity and clean appearance. LED driver cover snaps into place eliminating the need for tools to access it. Diffuser hinges from either side in a "lift and shift" manner and is self-centering. Suitable for dry and damp indoor locations.

MOUNTING

Mounts over electrical junction box. Offset mounting pads are formed within the housing which keep the luminaire level and slightly off of the mounting surface. Mounting holes are provided within offset to prevent distortion of housing when tightening mounting.

DIFFUSER

Specially-formed plastic diffuser produces a flawless light source with even illumination on all sides and no distracting dark spots. Invisible hanging clips permit removal of lens from either side.



DIMENSIONS

50.0"L x 9.5"W x 3.375"H
50.0"L x 13.75"W x 3.375"H

FEATURES & BENEFITS

- Contemporary and sleek fixture
- Surface mounted only
- Designed for commercial or residential use
- Suitable for dry or damp location
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V standard, 120V ELV/TRIAC optional
- Multiple lumen packages / wattages achievable through use of programmable LED drivers
- Several Kelvin temperature options (3000K, 3500K, 4000K, 5000K); ask factory for RGBW options
- Emergency battery backup available
- Power factor: >0.90
- 5 year warranty





CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series CLM

LED Surface Wraparound Cloud

ORDER INFORMATION


Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENS MATERIAL	SIZE	WATTAGE* & LUMENS*	DRIVER	COLOR/CRI**
CLM	MW Matte White Acrylic	248L 50" x 9.5"	S32W3450L 32 Watts 3450 Lumens	DMV 0-10V Dimming	30K 3000K 80 CRI
			S48W4800L 48 Watts 4800 Lumens	G120 ELV/TRIAC Dimming at 120V only	35K 3500K 80 CRI
			S57W5400L 57 Watts 5400 Lumens	D1MV 0-10V Dimming (dim to 1%)	40K 4000K 80 CRI
		448L 50" x 13.75"	S72W7000L 72 Watts 7000 Lumens		50K 5000K 80 CRI
			S97W9600L 97 Watts 9600 Lumens		930K 3000K 90 CRI
					935K 3500K 90 CRI
			940K 4000K 90 CRI		
			950K 5000K 90 CRI		

Note:
 *Programmable LED drivers allow custom configured wattages and corresponding lumens.
 **Consult factory for 90CRI 5000K availability.
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

Back

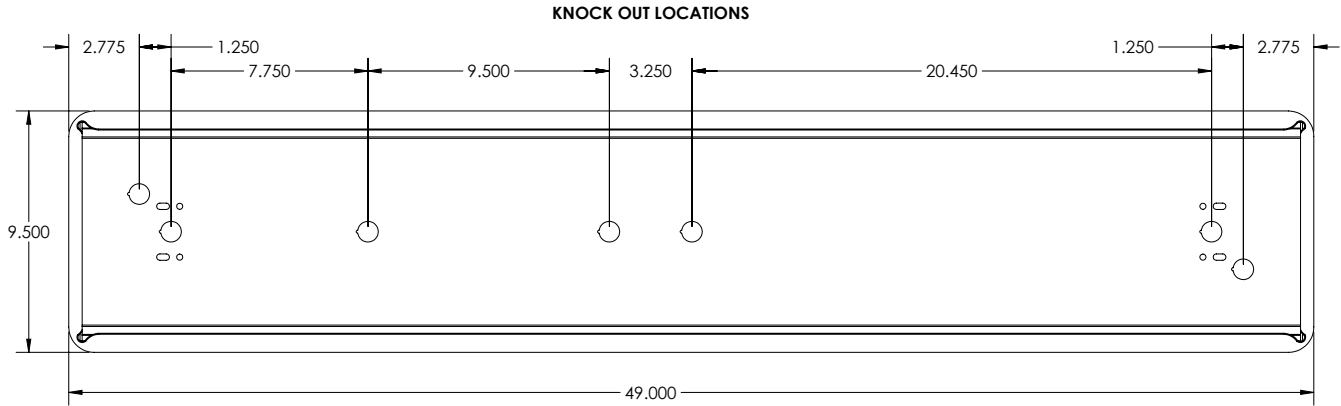

End

