

Series CLPU

Lightpipe LED Exit & Emergency Combo

ILLUMINATION

- Ultra-bright, energy efficient white LED emergency lighting
- 4.5W (36 LEDs x 0.125 watts) per light pipe
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "Light Pipe" lens for optimal light distribution
- Long life, energy efficient Red or Green LED EXIT sign illumination

ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8 long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED Light Pipe for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard

MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant high-impact resistant, thermoplastic in white or black finishes
- EZ snap-out chevron directional indicators

OPTIONS

- SDT: Self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- Custom: Signs available with requested "special" wording.

WARRANTY

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes



DIMENSIONS

12 1/2"L x 1 7/8"W x 8 1/4"H

FEATURES & BENEFITS

- UL Listed for damp locations (0°C-50°C)
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

STANDARD



OPTIONAL




ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CLPU	1 Single Face	R Red	W White	RC Remote Capable (standard)
	2 Universal Single/Double	G Green	B Black	SDT Self-diagnostics Custom Custom wording

DRAWINGS & IMAGES

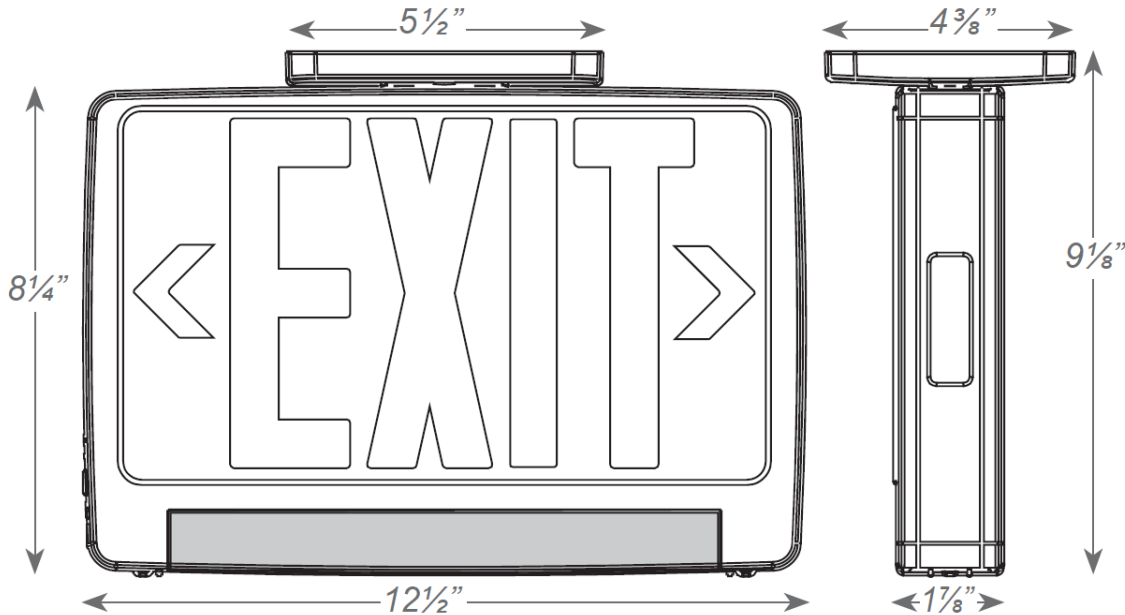

Note:
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.



CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series CLPU

Lightpipe LED Exit & Emergency Combo

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CLPU-RED/GREEN/RC	4.5	4.5	0.040	0.020
CLPU-RED/GREEN/SDT/RC-SDT	5.0	5.0	0.047	0.023

CENTER-TO-CENTER SPACING GUIDELINES

For reference only.



1	0.12	0.15	0.18	0.25	0.33	0.43	0.56	0.75	0.93	1.15	1.36	1.51	1.53	1.45	1.27	1.05	0.83	0.65	0.50	0.37	0.28	0.21	0.16	0.12
2	0.13	0.15	0.19	0.26	0.32	0.43	0.56	0.72	0.91	1.09	1.28	1.40	1.44	1.36	1.21	1.01	0.82	0.64	0.50	0.38	0.29	0.21	0.16	0.12
3	0.14	0.16	0.21	0.26	0.34	0.44	0.58	0.71	0.89	1.07	1.22	1.33	1.35	1.28	1.14	0.94	0.77	0.62	0.47	0.37	0.28	0.21	0.17	0.13
4	0.15	0.18	0.22	0.28	0.36	0.47	0.59	0.72	0.89	1.06	1.19	1.29	1.32	1.24	1.12	0.95	0.80	0.65	0.50	0.38	0.29	0.23	0.18	0.13
5	0.13	0.16	0.22	0.27	0.34	0.42	0.53	0.64	0.77	0.89	1.02	1.17	1.12	1.09	1.00	0.86	0.73	0.61	0.48	0.39	0.30	0.24	0.19	0.15
6	0.08	0.11	0.14	0.18	0.23	0.28	0.35	0.42	0.52	0.63	0.70	0.77	0.80	0.74	0.77	0.64	0.56	0.50	0.40	0.32	0.26	0.21	0.17	0.13

Meets NFPA 101 Requirements for: 12' center-to-center spacing - 3' path of egress 1' from wall - 7½' mounting height.

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY																					
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED									
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V										
CLPU-RC	9.6V	3W		X	X																			