Series D2D

LED Dusk to Dawn

The Dusk to Dawn Fixture of the future is here! Utilizing a single source LED, this dusk to dawn provides prismatic-designed light output for any environment. It comes with NEMA approved photocontrol (dusk to dawn lighting) which used with LED provides significant power savings. This luminaire consumes 40-45W to replace 100W MH light. Maintaining all the strengths of the traditional dusk to dawn fixtures (such as installation brackets and arms) while utilizing the latest generation of LEDs, this LED dusk to dawn will last for years to come. Only on when the light is absent to illuminate the darkest of nights.

This fixture is ideal for parking lots, backyards, service roads, warehouses, farms, residential areas, walkways, underpasses, gas station, factories, loading docks and more.

CONSTRUCTION

Aluminum die cast housing with UV resistant powder coat finish. Durable fixture that is UL/cUL listed for wet locations. Included mounting arm and brackets allow for mounting to multiple surfaces.

DIMENSIONS

10L - 10" Diameter
12L - 12" Diameter

FEATURES & BENEFITS

- UV resistant powder coat finish
- Input power - 45 watts
- Photocell included
- Mounting arm included
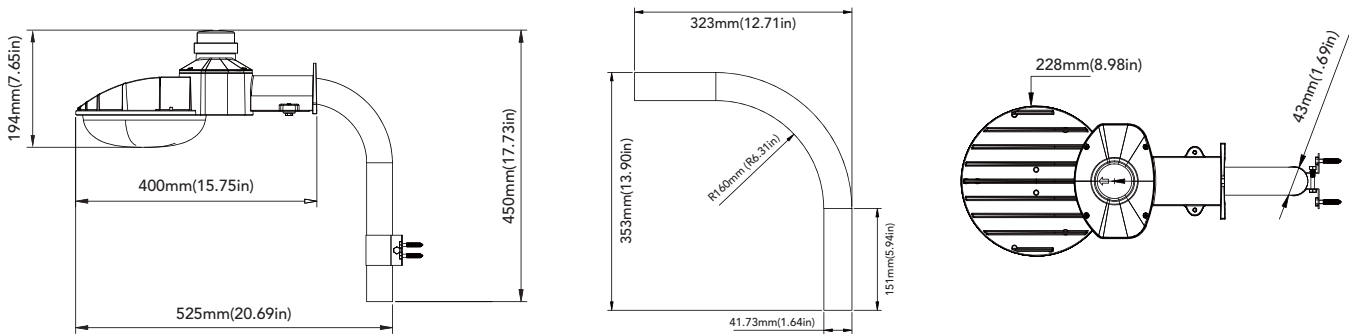- UL/cUL Listed for wet locations
- DLC listed
- 3 year warranty

Powered By
CREE LEDs

c UL us LISTED

DLC QPL LISTED

3 YEARS WARRANTY

Saylite

CATALOG#:

PROJECT:

TYPE:

Series D2D
LED Dusk to Dawn

ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

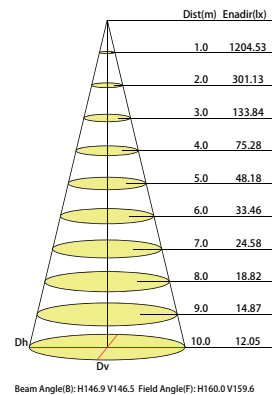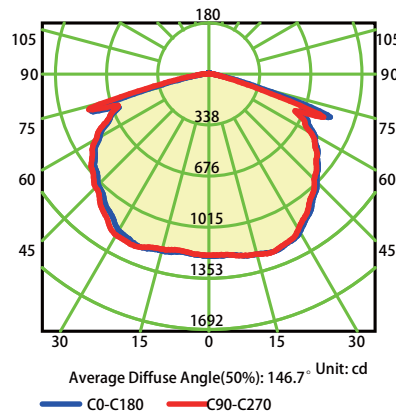| SERIES	SIZE		WATTAGE* & LUMENS*		DRIVER		CCT/CRI**		FINISH	
D2D Dusk to Dawn	**10L**	10" Dia.	**40W2900L**	40 Watts 2900 Lumens	**MV**	Multivolt 120-277V	**50K**	5000K 80 CRI	10L only **GY**	Grey
	12L	12" Dia.	**45W4900L**	45 Watts 4900 Lumens					12L only **BZ**	Dark Bronze

DRAWINGS & IMAGES (DARK BRONZE)

PHOTOMETRICS (DK. BRONZE)

D2D12L40W4900LMV50KBZ

Luminous Intensity Distribution Curve

Average Diffuse Angle(50%): 146.7°   Unit: cd

— C0-C180   — C90-C270

Illuminance at a Distance

Dist(m)	Enadir(lx)
1.0	1204.53
2.0	301.13
3.0	133.84
4.0	75.28
5.0	48.18
6.0	33.46
7.0	24.58
8.0	18.82
9.0	14.87
10.0	12.05

Beam Angle(B): H146.9 V146.5 Field Angle(F): H160.0 V159.6

Note:
Mounting Arm included with fixture.
*Programmable LED drivers allow custom configured wattages and corresponding lumens.
** Consult factory for 90 CRI 5000K availability.
We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.