

# Series LCTXTEU

## Exit & Emergency Low Level All LED Thermoplastic



### ILLUMINATION

- Long lasting, efficient ultra-bright white LED light strip
- 3.1 watts (24 LEDs x 0.13 watts) per light strip
- High performance, smooth, chrome-plated, metallized reflector with acrylic UV stabilized lens for optimal light distribution
- Long life, ultra-bright, energy efficient Red or Green LED EXIT sign illumination

### ELECTRICAL

- Dual 120-277 voltage
- Unique bi-color LED indicator alerts occupant on batter condition (Green-normal, Red-check battery)
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to Red/Green LED board and and the White LED light strip for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard

### MOUNTING

- Universal K/O pattern on back plate for wall mount

### HOUSING

- Patented specification-grade, low profile thin plastic design is ideal for low level applications.
- Injection molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron dimensional indicators

### WARRANTY

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Suitable for use in Floor Proximity Installation.

### DIMENSIONS

14 1/8"L x 1"W x 10 1/8"H

### FEATURES & BENEFITS

- Certified to CEC under Title 20 regulations
- UL Listed for damp locations (0°C-50°C)
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

#### STANDARD




CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

### ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR
LCTXTEU	1 Single Face	R Red	W White
		G Green	B Black

### DRAWINGS & IMAGES

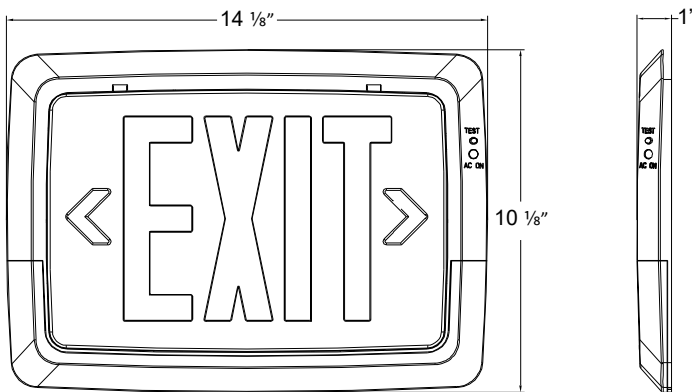

### ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LCTXTEU	1.2	1.2	0.092	0.092

Note:  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.