



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series RIG

LED Radius Indirect Glow



A linear RIG Series fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas. Specially designed for direct/indirect lighting without lens and the LED arrays are hidden on the side of housing.

CONSTRUCTION

Die-formed and welded 22-gauge cold-rolled steel. Snap-on end caps conceal all hardware, to enhance the uninterrupted smooth lines of this fixture. A removable top cover allows for fast and easy surface-mount installation. Hanging kits are easily mounted from the exterior with no need to open the fixture.

TYPICAL OPTIONS & ACCESSORIES

Cord sets, whips, hanging kits, customer finish. Contact factory for more details.



DIMENSIONS

SIZE L x W x H in inches
(2' to 8' in 1' increments)

8ft.-96"L x 4"W x 4"H

6ft.-72"L x 4"W x 4"H

4ft.-48"L x 4"W x 4"H

2ft.-24"L x 4"W x 4"H


FEATURES & BENEFITS

- Can be recessed or surface mounted to the ceiling or pendant hung.
- Consult factory for custom length or custom finish
- Light is continuous bringing a unique look
- Suitable for commercial or residential areas
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty




DRAWINGS & IMAGES


2 ft. - Back

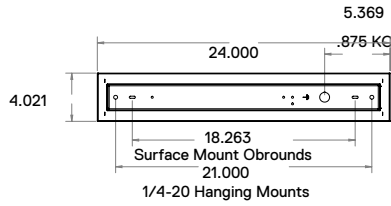


End

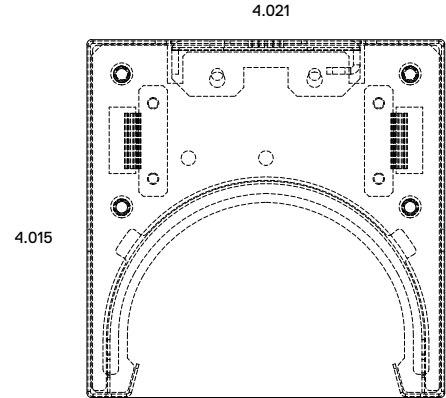


4 ft. - Back

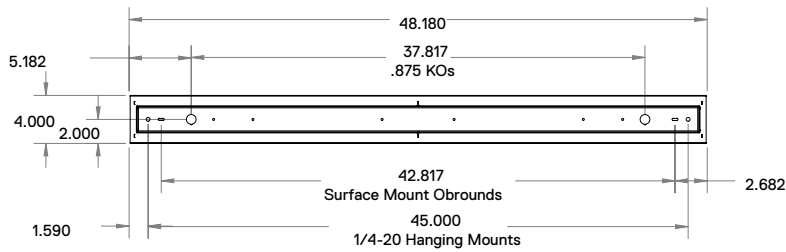

6 ft. - Back

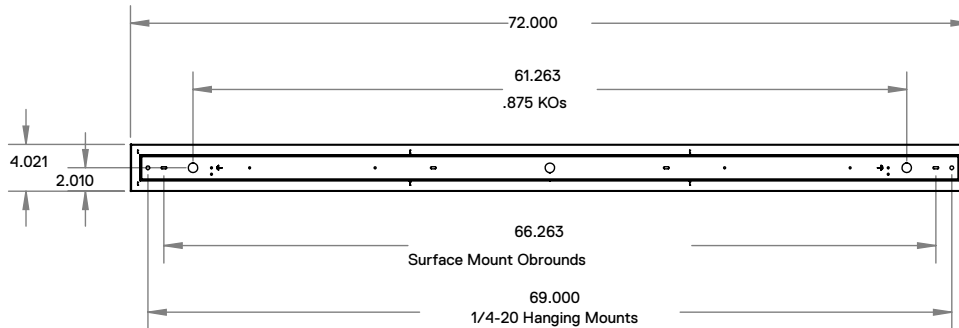

8 ft. - Back

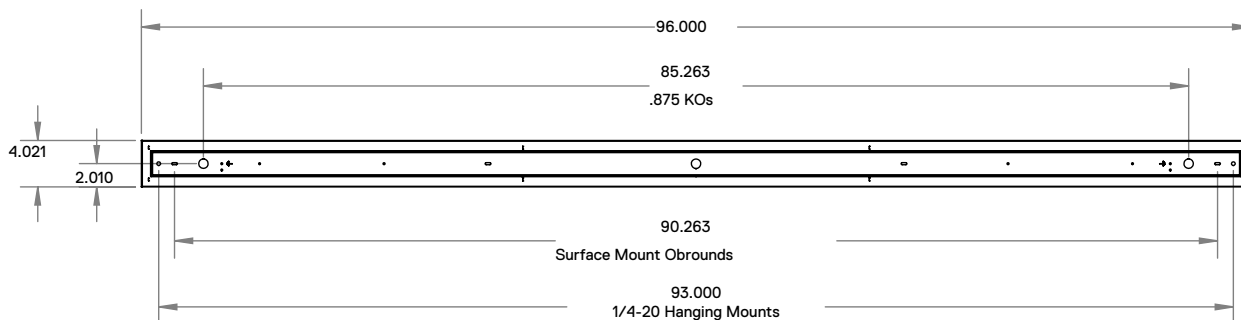

ORDER INFORMATION

SERIES	Mounting	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR
RIG LED Radius Indirect Glow	P Pendant Mount	24L 24"	C24W2000L 24 System Watts, 2000 Lumens	DMV 0-10V dimming	30K 3000K 35K 3500K 40K 4000K 50K 5000K
	W Wall Mount	48L 48"	C48W4000L 48 System Watts, 4000 Lumens		
	R Recess for 1" T-Bar grid ceiling	72L 72"	C72W6000L 72 System Watts, 6000 Lumens		
	RR 1/2" Recess flanged For before drywall installation	96L 96"	C96W8000L 96 System Watts, 8000 Lumens		
	RF For exiting drywall installation		* *		
	RRPF Perforated flange after drywall installation				

FINISH**	OPTIONS
WH White	HC421WH Cable kit with 6' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy
BK Black	HC421WHNPF Cable kit with 6' Cable Incl. and White Canopy (Non Power Feed)
SI Silver	HC422WH Cable kit with 12' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy
	HC422WHNPF Cable kit with 12' Cable Incl. and White Canopy (Non Power Feed)
	2SCS24WH Two stem kits with 24" stem, canopy and mounting hardware for a 4' fixture

** Custom finish is for Exterior Only. Reflector is always white for proper reflectance.

Note:

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.