



Texas Fluorescents
Reinvented

CATALOG# : _____

PROJECT : _____

TYPE : _____

Series UDLL

LED Dual Basket

The low-profile, dual-basket UDLL Series LED Dual Basket fixture offers an ever-pleasing aesthetic. It is designed to maximize efficiency and minimize LED glare, creating a soft “sky light” appearance for modern spaces. Dual baskets yield a slightly wider distribution.

CONSTRUCTION

Housing is die-formed and embossed 20-gauge steel. Luminaire body finish is high-reflectance baked white enamel, with matte white, linear ribbed reflectors. Wiring knockouts are provided on the back of housing.

MOUNTING

Recessed or surface mount



DIMENSIONS

22L - 24"L x 24"W x 3.25"H

24L - 48"L x 24"W x 3.25"H


FEATURES & BENEFITS

- Casts a softened 'sky light' appearance in modern office spaces
- Matte white reflective surfaces for soft, uniform light distribution
- For use in recessed inverted T-bar or grid ceilings
- Multiple Kelvin temperatures available (3000K, 3500K, 4000K, 5000K)
- Variety of lumen packages/ wattages available via use of programmable drivers
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V
120-277V standard,
120V ELV/TRIAC optional
- Power factor >0.90
- IC Rated for dry and damp locations
- Emergency battery backup available
- 5 year warranty




DRAWINGS & IMAGES


BACK 2X2

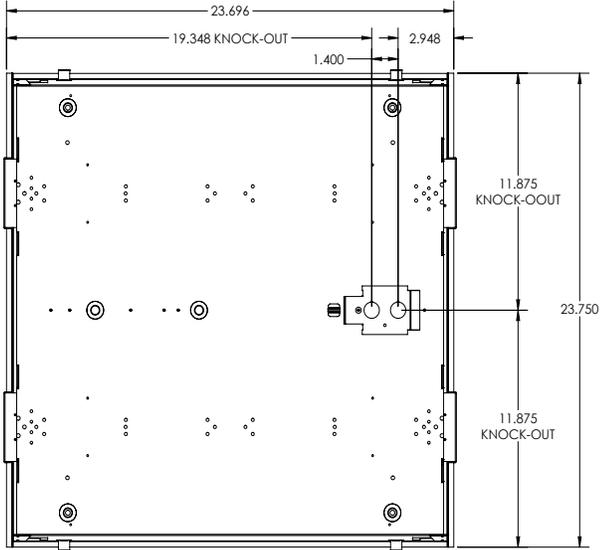

2X4


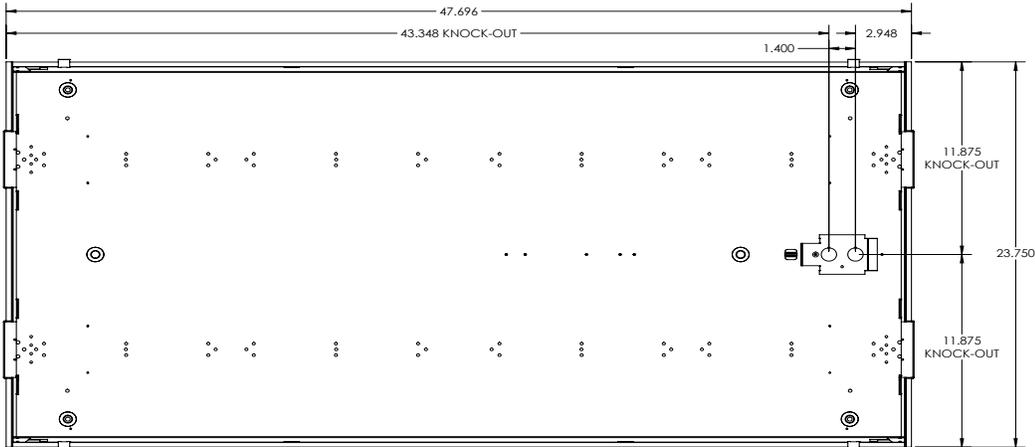


END

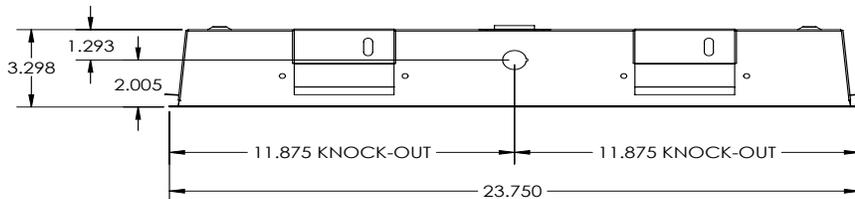

PHOTOMETRICS



2X2 - UDLL22LJ28W3200LDMV40K

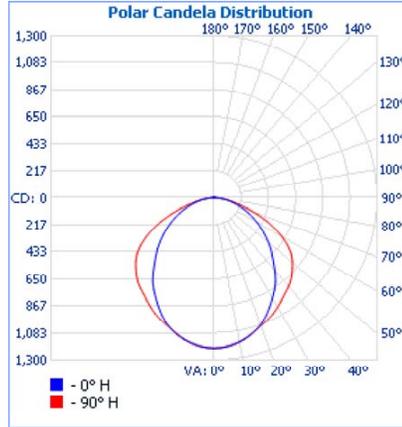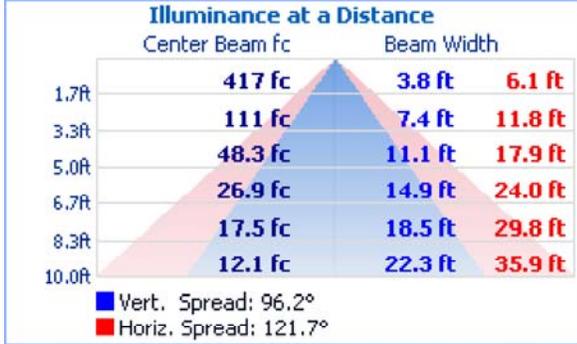

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	900.7	27.7%
0-40	1,458.4	44.8%
0-60	2,572.9	79.1%
60-90	666.7	20.5%
70-100	266.9	8.2%
90-120	4.0	0.1%
0-90	3,239.6	99.6%
90-180	13.4	0.4%
0-180	3,253.0	100%

2X4 - UDLL24LJ48W6000LDMV40K

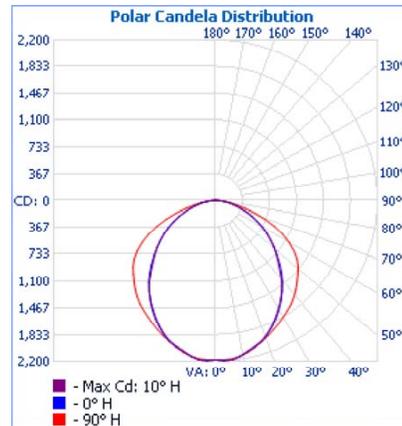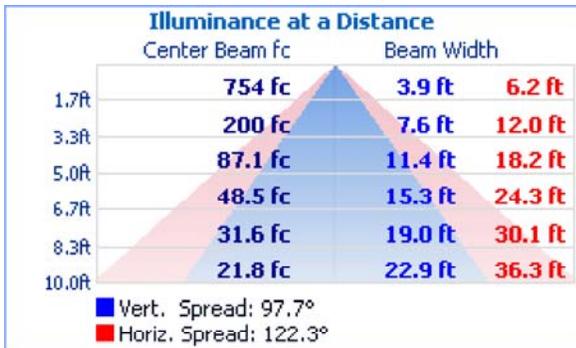

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,656.6	27.5%
0-40	2,683.6	44.5%
0-60	4,740.6	78.6%
60-90	1,286.6	21.3%
70-100	528.7	8.8%
90-120	1.7	0%
0-90	6,027.2	99.9%
90-180	3.5	0.1%
0-180	6,030.7	100%