



## FEATURES & SPECIFICATIONS

### INTENDED USE

A linear 6x6 surface mounted fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 6x6 fixtures can be installed individually or in group patterns.

### SIZE W x L X H in inches

4ft - 6" x 48" x 6"

8ft - 6" x 96" x 6"

### LAMP

2 or 4 lamp positions

### HOUSING

Die-formed and welded 20 gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Uplight fixtures have two rows of 1/2" x 4" apertures along the top of the housing to provide approximately 12% uplight for ceiling illumination.

### DIFFUSERS (not included)

Fixture accepts various lenses or louvers. Optional welded light-leak hinges are available on ends. 6' and 8' units have steel mullion to join two individual diffusers.

### MOUNTING

Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable. Welded heavy gauge steel flanges can be ordered to accept 3/8" threaded stems. Alignment brackets are available for continuous row mounting.

### LISTING

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing

### TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards, Contact factory for additional options.

## ORDERING INFORMATION

Example: **66RA232MV**

66R	A	232	MV	Finishes	Options
Series	Lens Material				
<b>66R</b> Regular Recess Lay-In	<b>A</b> Prismatic Acrylic #12 pattern			<b>Blank</b> For Recessed	<b>EM</b> Emergency Ballast, 500 lumens
<b>66RF</b> Recessed w/Flange	<b>MW</b> Matte White Acrylic	<b>MV</b> Electronic, Multivolt (120-277)		<b>WH</b> Matte White	<b>EM1</b> Emergency Ballast, 1400 lumens
<b>66S</b> Surface or Flush Direct Light Only	<b>BL</b> Baffled Louver	<b>LMV</b> Electronic, Multivolt, Lo-Lume		<b>SL</b> Silver	<b>M35</b> Asymmetrical reflector for wall wash
<b>66SI</b> Surface or Flush Indirect Only	<b>SP1</b> Specular Parabolic Louver 1 1/2" x 1 1/2" x 3.8"	<b>S</b> Residential 120V Ballast		<b>BM</b> Matte Black	<b>HC401WH</b> 5' cable kit with White Canopy
<b>66DI</b> Surface or Flush Direct w/ Indirect Slots		<b>PMV</b> Program Start (120-277)		<b>BZ</b> Bronze	<b>HC402WH</b> 15' cable kit with White Canopy
		<b>X1</b> For Single Ended LED Lamps			STEM kits sold separately
		<b>X2</b> For Double Ended LED Lamps			
		Lamp #	Lamp Type	Tandem Code	
		1, 2	17 24 in. T8	6	6ft. Tandem (Double Lamp Count)
		1, 2	25 36 in. T8	8	8ft. Tandem (Double Lamp Count)
		1, 2	32 48 in. T8		
		1, 2	14 24 in. T5		
		1, 2	21 36 in. T5	6	6ft. Tandem (Double Lamp Count)
		1, 2	28 48 in. T8	8	8ft. Tandem (Double Lamp Count)
		1, 2	24 34 in. T5HO		
		1, 2	39 36 in. T5HO	6	6ft. Tandem (Double Lamp Count)
		1, 2	54 54 in. T5HO	8	8ft. Tandem (Double Lamp Count)

F Flanged for sheetrock installation



Texas Fluorescents  
Reinvented


# 66 Series

Recessed, Surface or Pendant Mount



## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

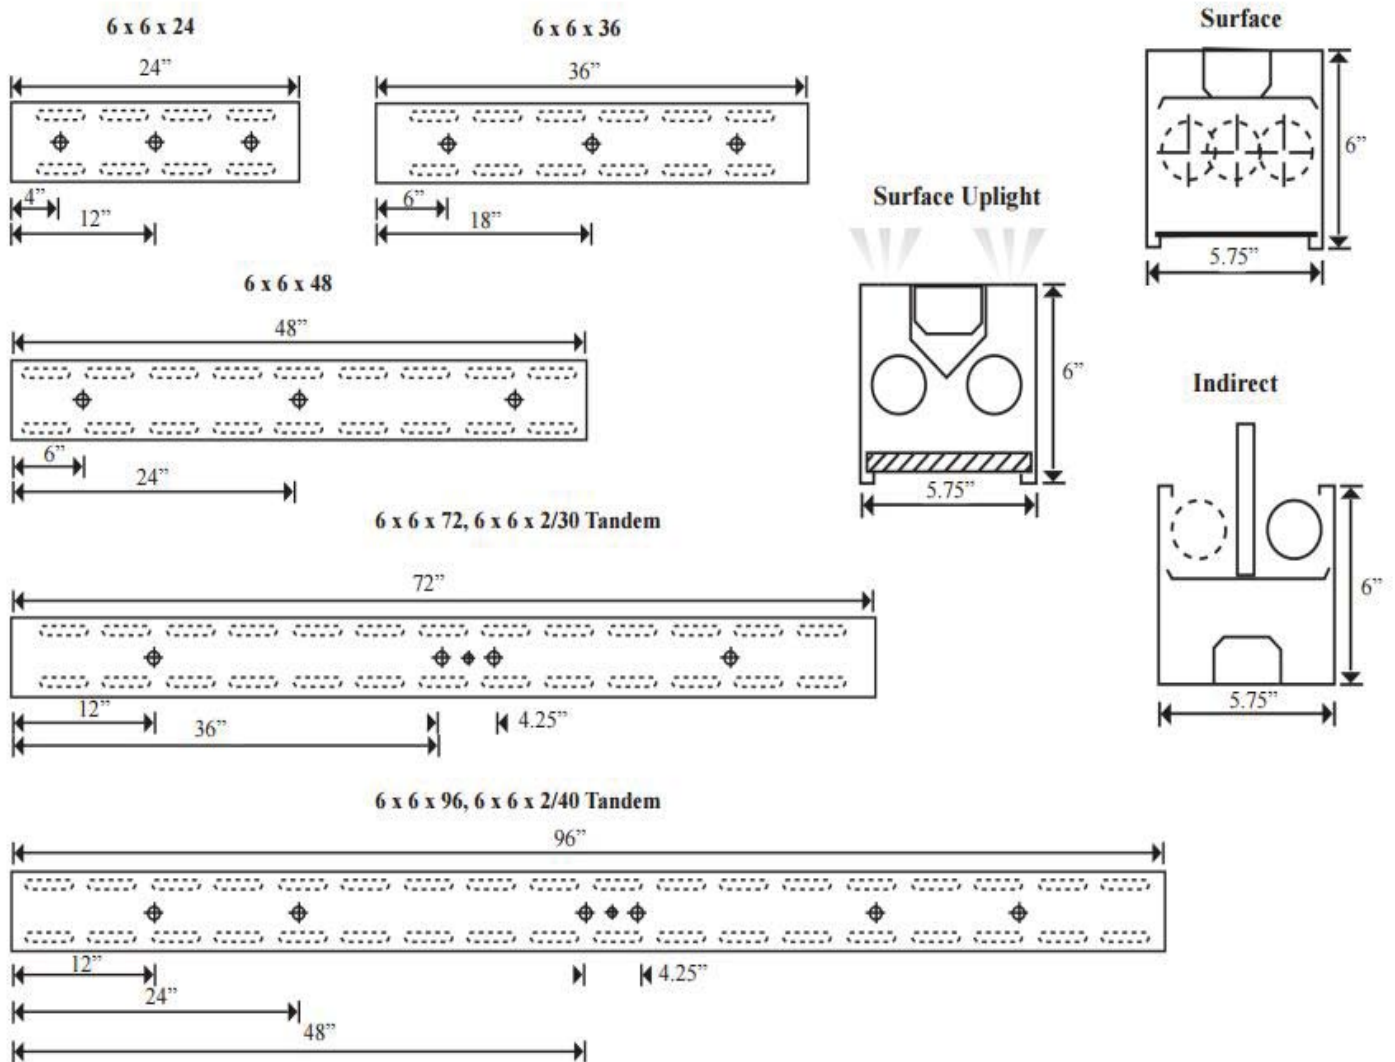



Texas Fluorescents  
Reinvented

# 66 Series

Recessed, Surface or Pendant Mount



### DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

## Flange Detail

Type **66RR**  
1/2 inch  
Recess for  
Drywall




**Flanged**

Type **66RF**  
Flush for  
Drywall



**Flanged**

Type **66R**  
for T-Bar



**Flangeless**