



JOB NAME:

CAT#:


TYPE:

### APPLICATIONS



This linear 2x3 fixture is designed for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas. This series can be installed individually or in continuous runs. The L23R is specifically designed for direct lighting with a snap-in lens to hide the LED arrays.

### FEATURES & BENEFITS

- Available in custom finishes (consult factory)
- IC Rated
- $L_{70} > 50,000$  hrs.
- Min CRI 80
- **PI3D comes standard** (fixture to fixture wiring options for power and dimming)
- $cETL_{US}$  listed
- 5 year warranty

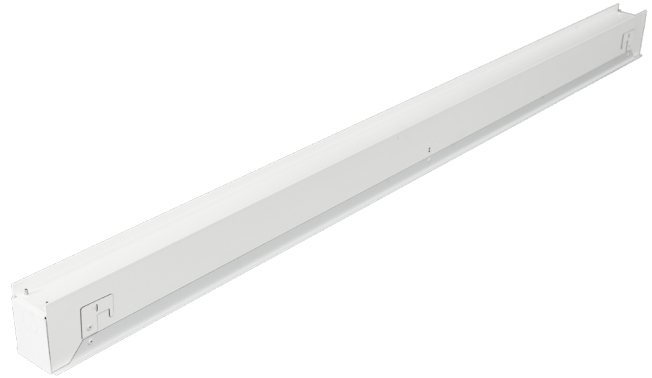

### DIMENSIONS

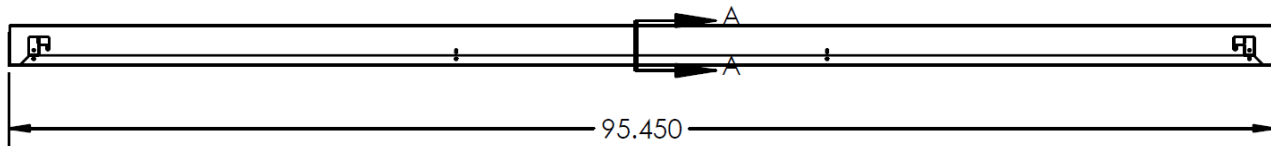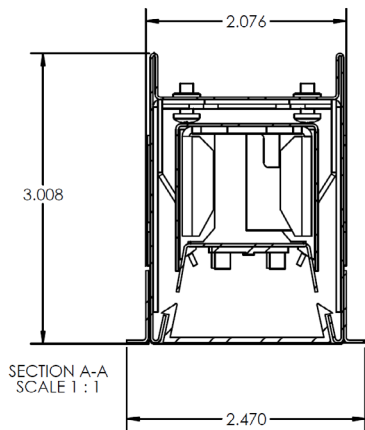

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: L23R 48 LED 38 DMV WH SF 40

L23R		LED		SF			
1. SERIES	2. LENGTH <sup>1</sup>	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. FINISH <sup>2</sup>	7. LENS	
<b>L23R</b> Recess Mount for 1" T-Bar Grid Ceiling	<b>48</b> 47.45" long	<b>LED</b>	<b>48 inch</b>	<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	<b>WH</b> White <b>SI</b> Silver <b>BK</b> Black	<b>SF</b> Snap-in Frosted Acrylic Lens	
	<b>96</b> 95.45" long		<b>26</b> 26W 2600 Lumens				
			<b>38</b> 38W 3800 Lumens				
			<b>45</b> 45W 4500 Lumens				
			<b>96 inch</b>				
			<b>52</b> 52W 5200 Lumens	<b>SDMV</b> Step dimming Multivolt			
			<b>76</b> 76W 7600 Lumens		<b>D347V</b> 347VAC 0-10V Dimmable		
			<b>90</b> 90W 9000 Lumens			<b>D120</b> Triac Dimming 120VAC	
				<b>D277</b> Triac Dimming 177VAC			
<b>8. COLOR TEMP</b>							
<b>30</b>	3000K						
<b>35</b>	3500K						
<b>40</b>	4000K						
<b>50</b>	5000K						

**Notes:**

<sup>1</sup>Consult for other lengths

<sup>2</sup>Consult for custom finish options

<sup>3</sup>See L23P-L23S-L23W-LED and L23RR-L23RF-L23RPF-LED spec sheets for matching pendant, surface, wall mount, and flanged recessed fixtures

Dimensions and specifications subject to change without notice.

