



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The linear L44IR LED linear fixture is for distinctive architectural lighting plans. Ideal for hotels, apartments, corridors, lobbies and office areas. The L44IR series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS



- Housing is die-formed and welded 22-gauge cold-rolled steel
- Exterior-accessible 1/4-20 holes allow for fast and easy pendant mounting with no need to open the fixture
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- _cETL_{US} listed for damp location




Side View

DIMENSIONS

24 Inch

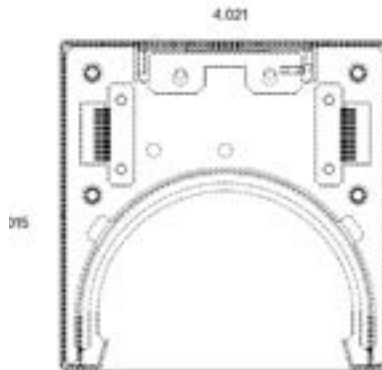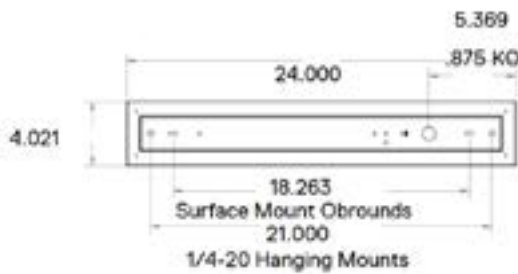

48 Inch

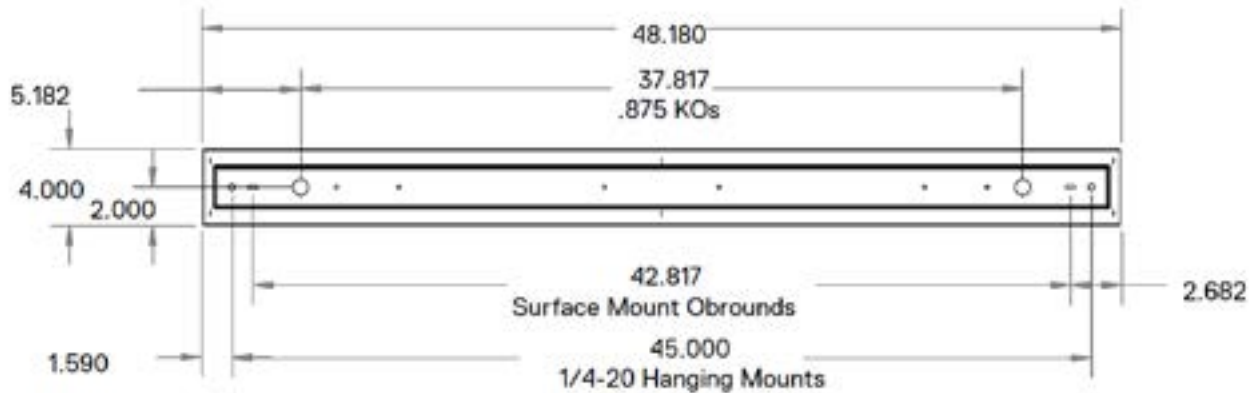

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

DIMENSIONS

96 Inch

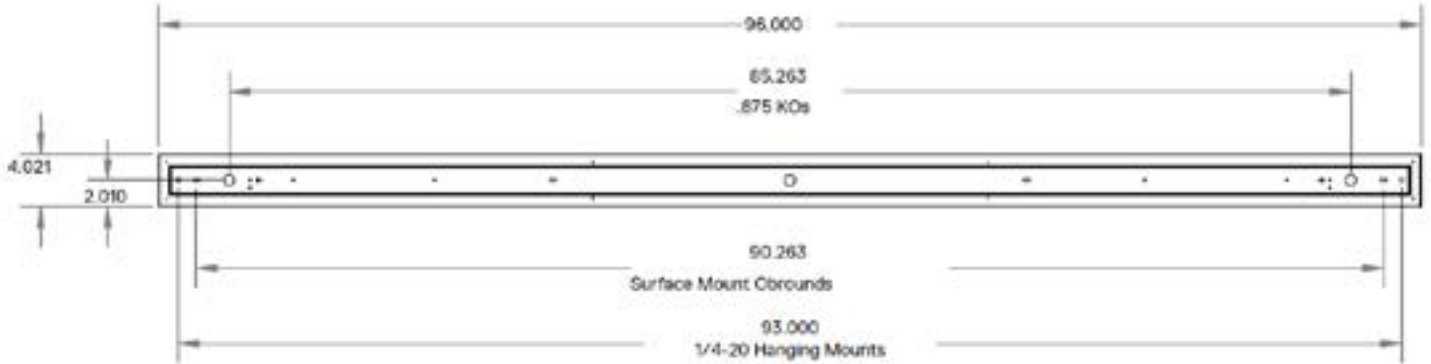

ORDERING

EXAMPLE: L44IRRF 48 LED 25 DMV WH 30 EM SS

L44IR		RF		LED									
1. SERIES		2. MOUNTING		3. LENGTH		4. GEAR		5. WATTAGE/LUMENS		6. DRIVER		7. FINISH	
L44IR	LED Indirect Radiant Linear Fixture	RF	Recessed Flanged	24 24"		LED		24 in.		DMV	120-277V Multivolt 0-10V Dimmable Step dimming Multivolt	WH	White
				48 48"				48 in.				SI	Silver
				96 96"				96 in.				BK	Black
								50 50W 4000 Lumens		SDMV			
								100 100W 8000 Lumens					

8. CRI		9. COLOR TEMP		10. EMERGENCY(O)?		11. SENSOR(O)?		12. CONFIGURATION	
Blank	80	30	3000K	EM	Emergency Battery Pack 10W ~ 1700 lumens	SS	Integral Occupancy Sensor	BLANK	Individual
9	90	35	3500K	EM5	Emergency Battery Pack 5W ~ 850 Lumens	SNS200	ALC Qualified	-B	Beginner Run
		40	4000K					-E	Ender Run
		50	5000K					-J	Joiner

Note:
(O) is optional

Dimensions and specifications subject to change without notice.

