



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The linear L44IR LED linear fixture is for distinctive architectural lighting plans. Ideal for hotels, apartments, corridors, lobbies and office areas. The L44IR series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS



- Housing is die-formed and welded 22-gauge cold-rolled steel
- Exterior-accessible 1/4-20 holes allow for fast and easy pendant mounting with no need to open the fixture
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- _cETL_{US} listed for damp location




Side View

DIMENSIONS

24 Inch

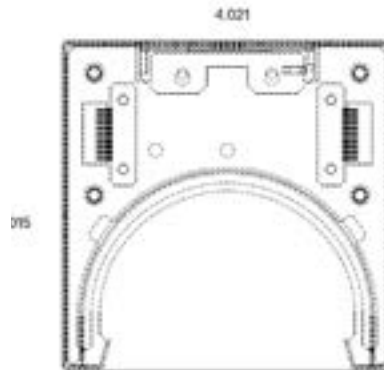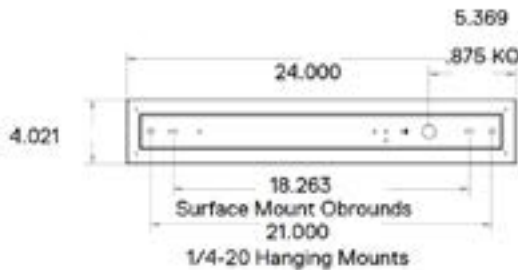

48 Inch

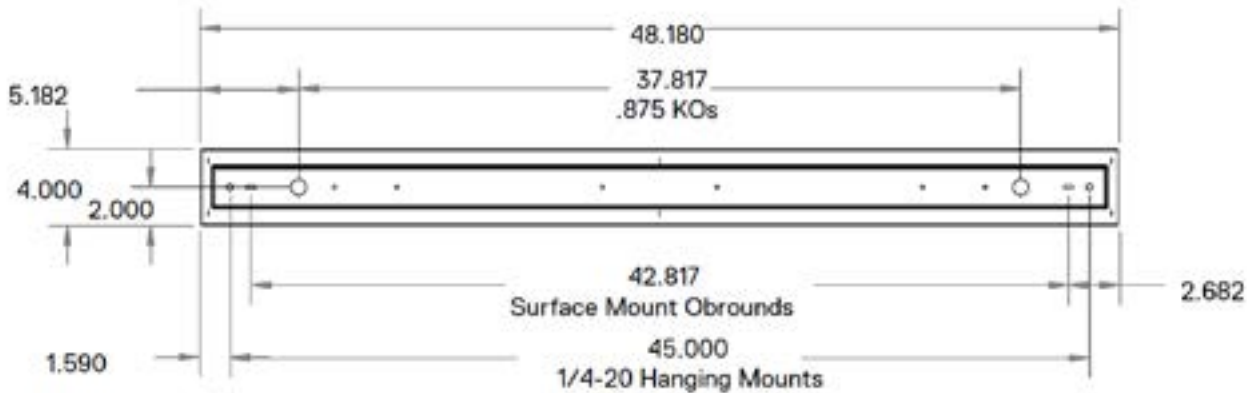

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

DIMENSIONS

96 Inch

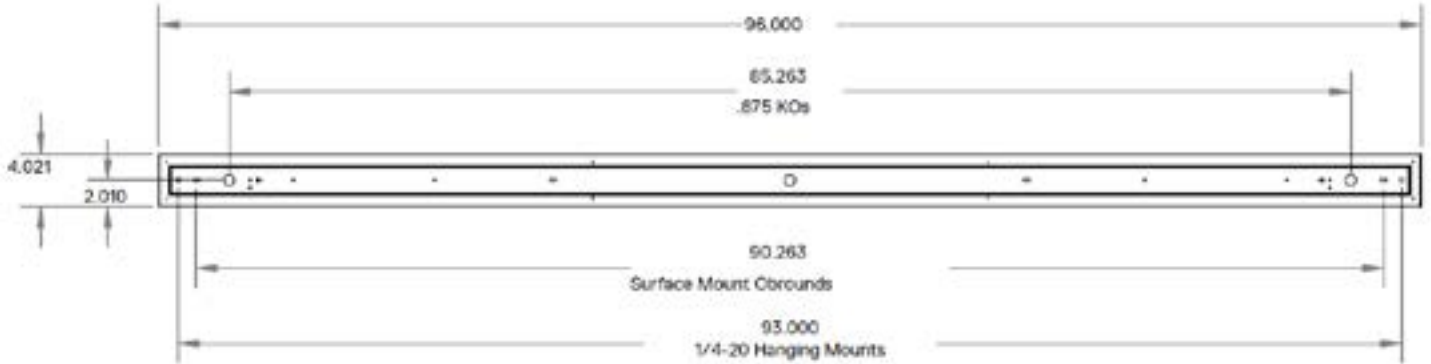

ORDERING

EXAMPLE: L44IRRR 48 LED 25 DMV WH 30 EM SS

L44IR		RR		LED									
1. SERIES		2. MOUNTING		3. LENGTH		4. GEAR		5. WATTAGE/LUMENS		6. DRIVER		7. FINISH	
L44IR	LED Indirect Radiant Linear Fixture	RR	Recessed Flangeless Appearance	24	24"	LED		25	25W 2000 Lumens	DMV	120-277V Multivolt 0-10V Dimmable	WH	White
				48	48"					SDMV	Step dimming Multivolt	SI	Silver
				96	96"			50	50W 4000 Lumens			BK	Black
								100	100W 8000 Lumens				
8. CRI		9. COLOR TEMP		10. EMERGENCY(O) ²		11. SENSOR(O) ²		12. CONFIGURATION					
Blank	80	30	3000K	EM	Emergency Battery Pack 10W ~ 1700 lumens	SS	Integral Occupancy Sensor	BLANK	Individual				
9	90	35	3500K	EM5	Emergency Battery Pack 5W ~ 850 Lumens	SNS200	ALC Qualified	-B	Beginner Run				
		40	4000K					-E	Ender Run				
		50	5000K					-J	Joiner				

Note:
(O) is optional

Dimensions and specifications subject to change without notice.

