



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS


The linear 4x4 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x4 Series fixtures can be installed individually or in group patterns. Die-formed and welded 22-gauge cold rolled steel. Removable end plates allow continuous wireway mounting.

### FEATURES & BENEFITS

- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Optional welded light-leak flanges are available on ends
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- Recessed versions are all IC Rated
- cETL<sub>US</sub> listed for damp location



Matte White

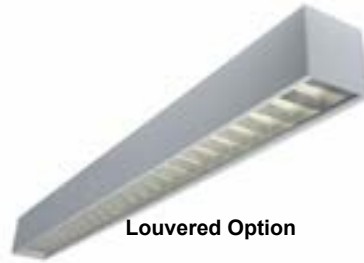


Louvered Option




No Reflector

### DIMENSIONS

#### 4FT Dimensions

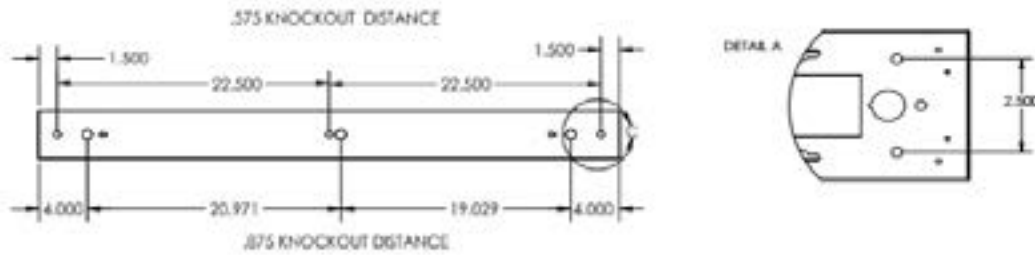

#### 8FT Dimensions

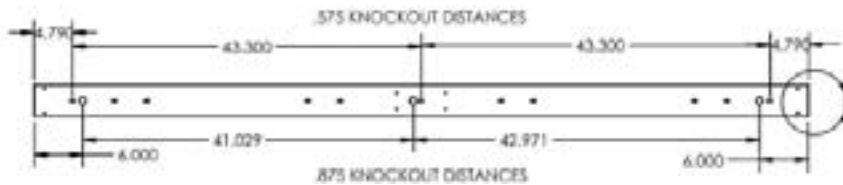

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:


TYPE:

**DIMENSIONS**


**4FT Dimensions**

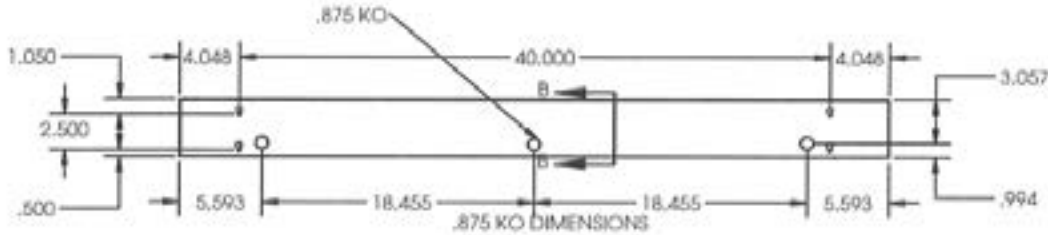

**8FT Dimensions**

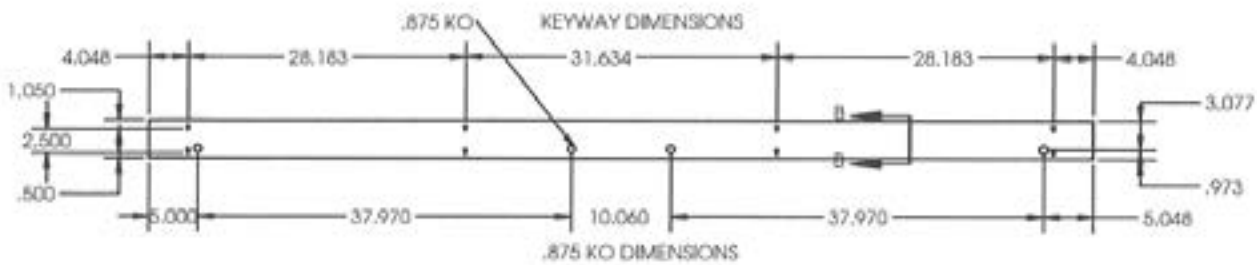

**Side View - Recessed**

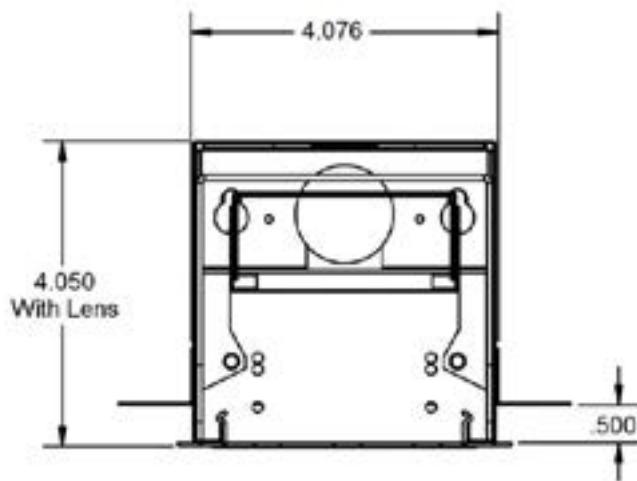

Type R  
For 1" T-bar



Flangeless  
Apparance



Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: L44-R 24 LED 13 DMV BK SF 30 EM SS H6W5

**L44 — R LED**

1. SERIES	2. MOUNTING	3. LENGTH	4. GEAR	5. DISTRIBUTION	6. WATTAGE/LUMENS	7. DRIVER	8. FINISH <sup>2</sup>
<b>L44</b>	<b>R</b> Regular Recessed Lay-in	<b>48'</b> 48" long	<b>LED</b>	<b>Blank</b> Downlight (std.)	<b>4 ft &amp; 8 ft.</b>		<b>WH</b> Matte White <b>SL</b> Silver <b>BK</b> Matte Black <b>BZ</b> Bronze <b>IN</b> Iron
		<b>96</b> 96" long			<b>24</b> 24W 2400 Lumens	<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	
		<b>1U2D</b> Uplight and Downlight		<b>48</b> 48W 4800 Lumens	<b>SDMV</b> Step dimming Multivolt		
				<b>57</b> 57W 5400 Lumens		<b>LUT</b> Lutron Driver <sup>1</sup>	
					<b>8 ft. only</b>		
					<b>97</b> 97W 9600 Lumens		
					<b>114</b> 114W 10800 Lumens		

9. LENS	10. CRI	11. COLOR TEMP	12. EM (O) <sup>5</sup>	13. SENSOR (O) <sup>5</sup>	15. CONFIGURATION
<b>MW</b> Matte White lens (std) .100 thick lens	<b>Blank</b> 80 <b>9</b> 90	<b>30</b> 3000K	<b>EM</b> Emergency Battery Backup <sup>3</sup>	<b>SS</b> Integral Occupancy Sensor (adds ~3" to fixture length)	<b>Blank</b> Individual
		<b>35</b> 3500K			<b>-B</b> Beginner Run
		<b>40</b> 4000K			<b>-E</b> Ender Run
<b>S.5</b> Specular Parabolic Louver (1/2"x1/2"x3/8")		<b>50</b> 5000K			<b>-J</b> Joiner Run
<b>SF</b> Snap-in Frosted Lens -85% Transmission					
<b>LV</b> Baffled Louver					

**Notes:**

\*See Lutron Chart for Driver & Controls Options

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:


TYPE:

## L44 JOINER BOX


The L44 joiner box provides a sleek and modern solution for joining multiple linear fixtures to produce a visually appealing and continuous run. Easily create custom runs featuring 90° turns as well as “X” and “T” patterns. The joiner box is available in the same colors as the linear fixtures for the perfect match and finish.

## FEATURES AND BENEFITS

- Joiner box can be pendant hung by stem or cable
- Available in 1 way, 2 way, 3 way, and 4 way options
- Seamless design that is both fashionable and functional
- Formed and welded 22-gauge cold rolled steel
- Internal press in nuts creates ease in joining assembly
- Grommeted wire ways protect wiring

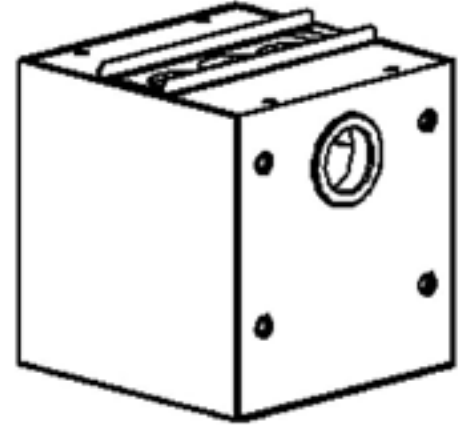

## DIMENSIONS

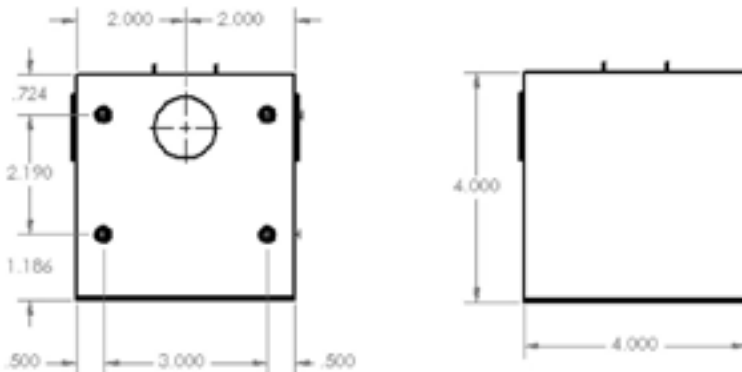

## ORDERING

EXAMPLE: L44\_JB -1WAY P WH A-HC301WH

1. SERIES	2. CONFIGURATION	3. HK	4. FINISH	5. OPTIONS
<b>L44_JB</b>	-1WAY -2WAY 90° -2WAY 180° -3WAY -4WAY	<b>P</b> Power <b>NP</b> Non-Power	<b>WH</b> White <b>BK</b> Black <b>SL</b> Silver <b>IN</b> Iron <b>BZ</b> Bronze	<b>A-HC301WH</b> Cable kit with 4' cable + power feed cable included with white canopy <b>A-HC301WH5W</b> Cable kit with 4' cable + power feed 0-10Vdimming cable included with white canopy (5 wire) <b>A-HC302WH</b> Cable kit with 12' cable + power feed cable included with white canopy <b>A-HC302WH5W</b> Cable kit with 12' cable + power feed 0-10Vdimming cable included with white canopy (5 wire)

Dimensions and specifications subject to change without notice.