



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This premium quality recessed architectural volumetric is available with 4 different unique diffusers. The different designs reflect popular themes in architectural design trends, allowing these luminaires to have versatility across a variety of commercial spaces. Ideal applications include all commercial and industrial buildings requiring general illumination with reversed configuration.

Housing is die-formed and embossed from cold rolled steel. Wiring access plate and knockouts are provided on back of housing allowing for flexible greenfield attachment. Driver cover snaps easily into place eliminating the need for tools when accessing the driver. Acrylic lens is held within a hinged steel frame door. The heavy gauge door frame hinges downward on either side and is held in the closed position by two positive cam latches. Knockouts are provided on ends for continuous wiring.



FEATURES & BENEFITS

- Min CRI 82
- $L_{70} > 60,000$ hrs
- IC Rated
- Corrosion and scratch resistant
- Smooth edges for easy handling
- Ends are secured by snap-in interlocking system
- Exclusive "Light Lock" frame reduces light leaks
- Flush steel door with rotary action cam latches and hinges from either side
- Easy access plate for quick wiring
- Equipped with Integral Earthquake Clips
- $cETL_{US}$ listed for damp locations up to 95 watts

Dimensions and specifications subject to change without notice.





JOB NAME:


CAT#:

TYPE:

DIMENSIONS


MODEL CONFIGURATION	A	
2' x 2'	23 3/4"	23 3/4"
2' x 4'	23 3/4"	47 3/4"

TOP VIEWS

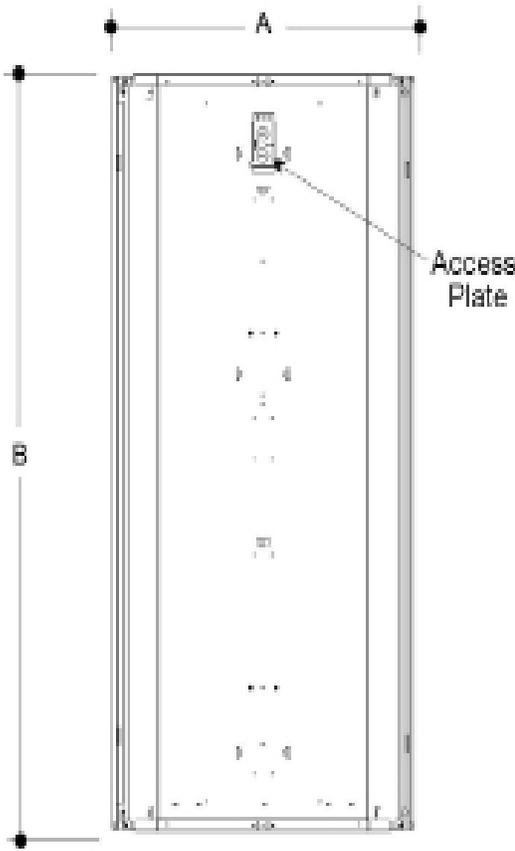


SIDE VIEW

B

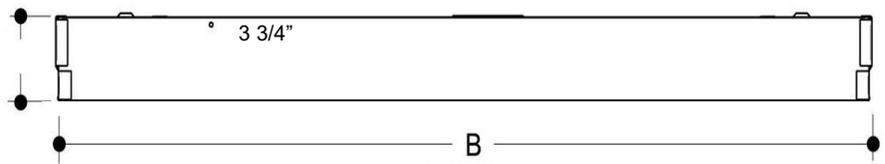

END VIEW

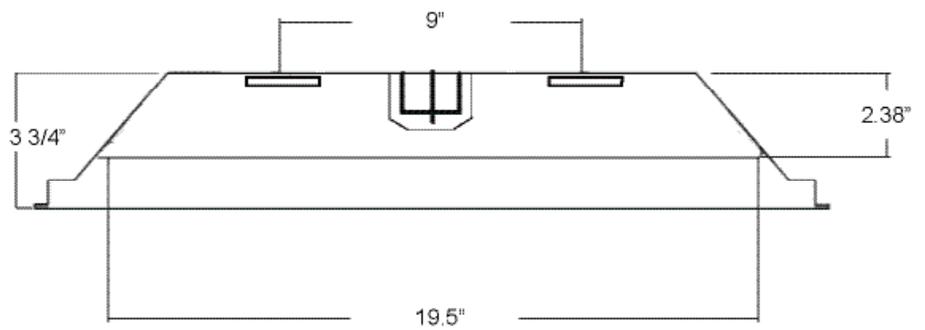

Dimensions and specifications subject to change without notice.







JOB NAME:



CAT#:

TYPE:

A-Curved Ribbed Center Troffer

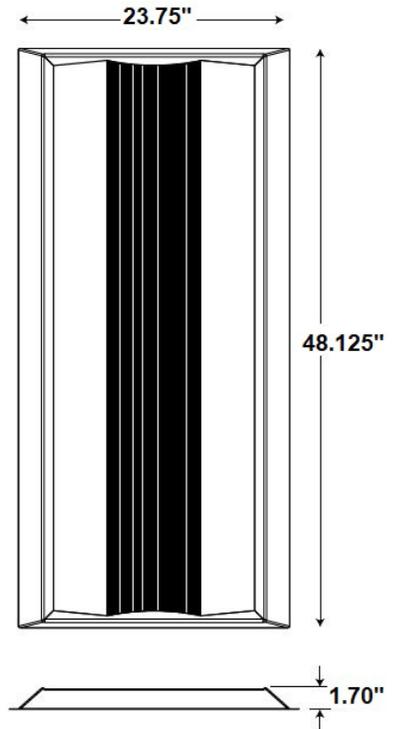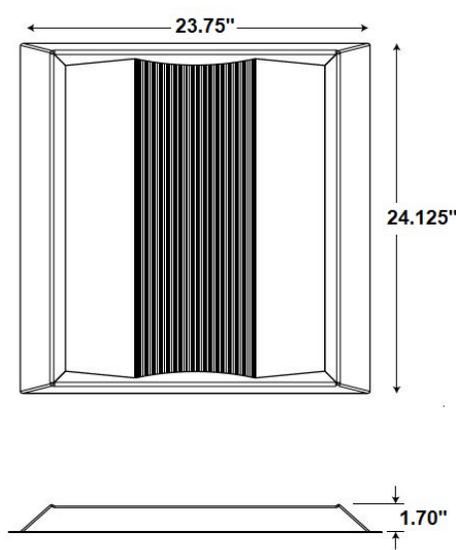

B-Curved Body Troffer

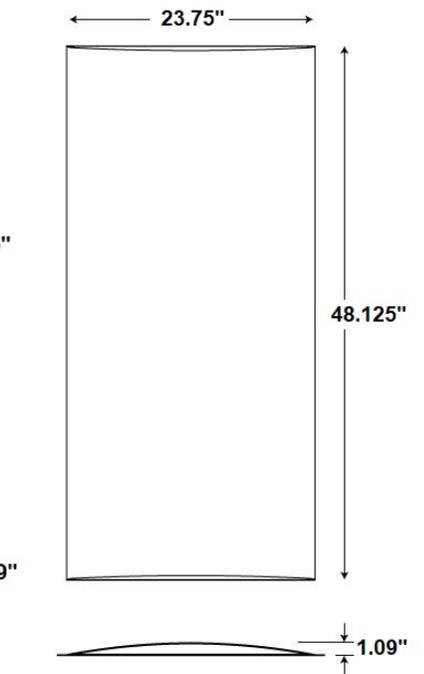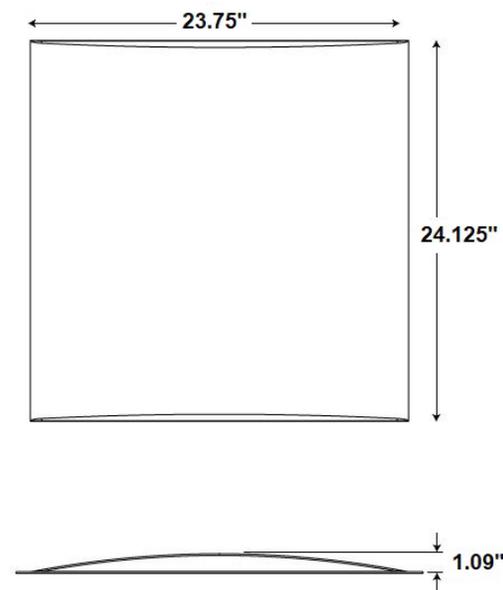

Dimensions and specifications subject to change without notice.






JOB NAME:


CAT#:

TYPE:

C- Flat Center Troffer

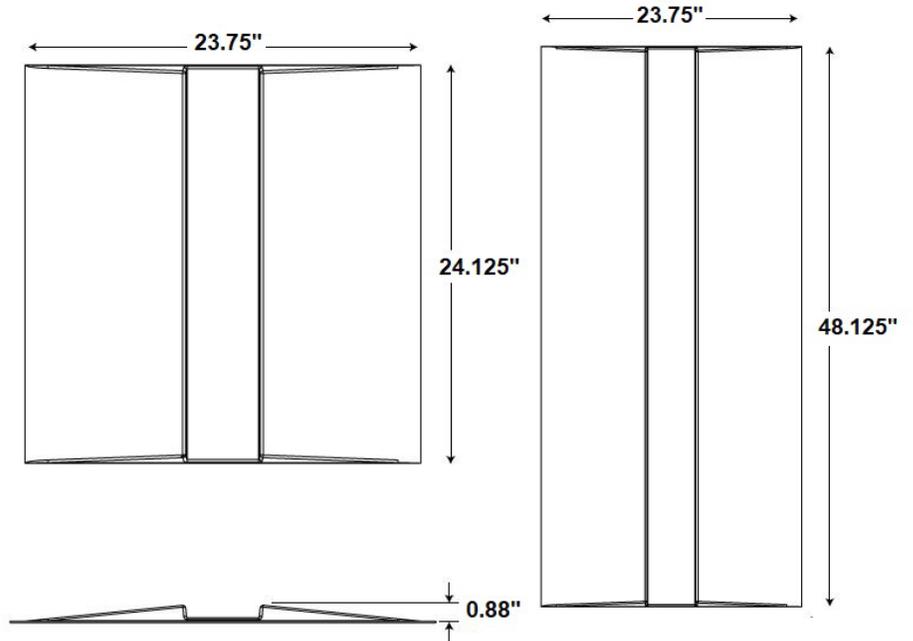

D- Concave Body Troffer

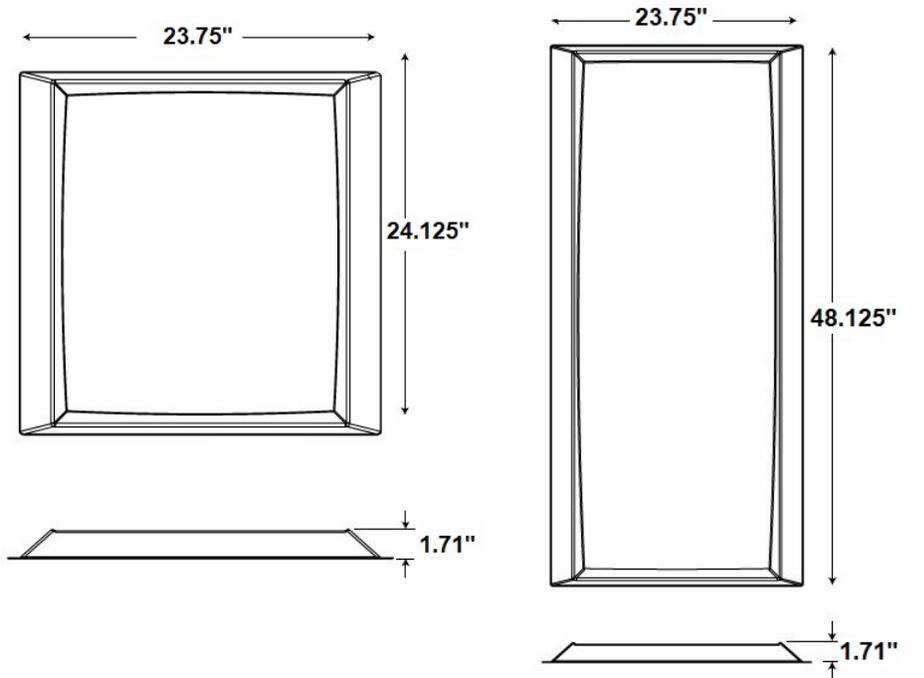

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RAV A 22 LED 20 DMV 30 EM SSM G3 FA

RAV		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS	7. COLOR TEMP	8. EMERGENCY (O)'		
RAV	22 2x2	LED	2X2 Standard	DMV 120-277V Multivolt 0-10V Dimmable	A Curved Ribbed Center	30 3000K	EM 12W, 1300 lumen, battery backup		
Recessed	24 2x4		20 20 Watts 2300 Lumens	SDMV Step dimming Multivolt	B Curved Body Troffer	35 3500K	EM5 5W, 650 lumen, battery backup		
Architectural			24 24 Watts 2600 Lumens	D347V 347VAC 0-10V Dimming	C Flat Center Troffer	40 4000K			
Volumetric			28 28 Watts 3000 Lumens	D120 Triac Dimming 120VAC	D Concave Body Troffer	50 5000K			
			35 35 Watts 3600 Lumens	D277 Triac Dimming 277VAC					
			45 45 Watts 4470 Lumens						
			2X4 Standard						
			32 32 Watts 3970 Lumens						
			35 35 Watts 4345 Lumens						
			45 45 Watts 5500 Lumens						
			48 48 Watts 5900 Lumens						
			57 57 Watts 6735 Lumens						
			62 62 Watts 7000 Lumens						
			72 72 Watts 8700 Lumens						
9. SENSOR (O)'		10. GASKETING (O)'		11. CORD (O)'					
SSM Microwave Sensor		G3 Triple Gasketing		FA Flush Aluminum					
				WP 6' 3 wire whip					

Notes:
¹(O) is Optional

Dimensions and specifications subject to change without notice.

