

JOB NAME: CAT#: TYPE:

APPLICATIONS

The RDISA-LED is a specification grade, Volumetric Recessed LED Luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened appearance to the modern office environment.

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal.





- · Volumetric recessed luminaire provides a low glare light source
- · Matte white reflective surface for soft, uniform light distribution
- · Multiple diffuser options available
- Min CRI 82
- · Easy access plate for quick wiring
- Heat removal slots on the side of housing remove heat and prevent dust from entering the unit from the plenum
- 5 year warranty



DIMENSIONS

1x4 12"Wx47"Lx3.26"H 2x4 12"Wx47"Lx3.26"H 2x2 24"Wx24"Lx3.26H 2x4

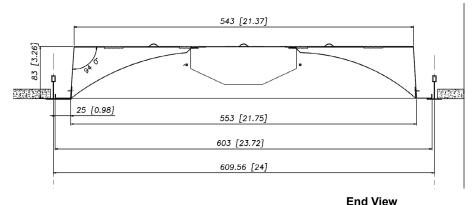

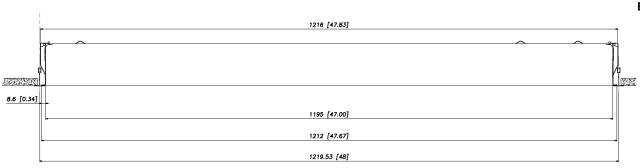

Side View







Dimensions and specifications subject to change without notice.




JOB NAME: CAT#: TYPE:

DIMENSIONS

1x4 12"Wx47"Lx3.26"H 2x4 12"Wx47"Lx3.26"H 2x2 24"Wx24"Lx3.26H

<u>2x2</u>

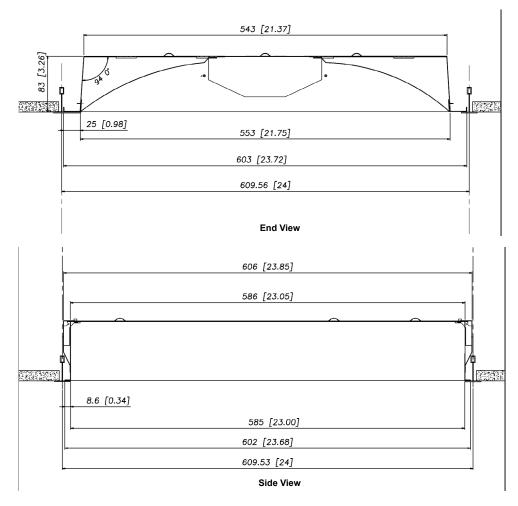







Dimensions and specifications subject to change without notice.





JOB NAME: CAT#: TYPE:

ORDERING

EXAMPLE: RDISA 14 LED 28 FR DMV 30 EM SS WP

RDISA		LED 3. GEAR								
1. SERIES	2. SIZE		4. WATTAGE/LUMENS		5. LENS		6. LENS MATERIAL		7. COLOR TEMP	
RDISA	14 1X4 22 2X2 24 2X4	LED	28 32 48 57 60 20 24 28 30 35 42 28 32 48 57 60 62 72	28 Watts 3200 Lumens 32 Watts 3620 Lumens 48 Watts 5450 Lumens 57 Watts 6080 Lumens 60 Watts 6430 Lumens 2X2 20 Watts 2440 Lumens 24 Watts 3030 Lumens 30 Watts 3500 Lumens 35 Watts 4200 Lumens 42 Watts 4800 Lumens 42 Watts 3620 Lumens 32 Watts 3620 Lumens 48 Watts 5450 Lumens 57 Watts 6080 Lumens 60 Watts 6430 Lumens 60 Watts 6430 Lumens 62 Watts 6900 Lumens 72 Watts 7000 Lumens	FR PF	Frosted Lens Perforated Basket	DMV SDMV D120 D347V D277	0-10V Dimming 120-277VAC Multivolt Step Dimming 120-277VAC 100%-40% 120V Dimmable 347VAC 0-10V Dimmable Triac Dimming 277VAC	30 35 40 50	3000K 3500K 4000K 5000K

8. EMERGENCY(O)1

EM 10 Watt 1300 Lumen
Battery Backup
EM5 Emergency Battery

Pack 5W^650 Lumens

EM4F Emergency Battery Pack 4W~450

Lumens

9. SENSOR(O)1

10. WHIP(O)1

SS Integrated Sensor PF Perforated

PF Perforated Basket

RL Ribbed Acrylic

WP 6 ft. 3 wire mc whip

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.





