



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The SKY Series offers the look and feel of a fluorescent luminaire - subtle soft direct elements, interest and depth across the ceiling plane - with a contemporary look that blends with today's commercial spaces. Suitable for offices, hospitals, schools, etc. Suitable for use in standard 15/16" inverted T-bar grid ceilings.



Low profile troffer body housing with white enamel finish. High reflectance optical engine. Linear ribbed acrylic lens with Lumieo®. Recessed troffer fixture body assembly in 2'x2' and 2'x4' size.



FEATURES & BENEFITS

- High performance optical engine delivers main beam focus through the integrated acrylic lens
- Linear ribbed acrylic lens with Lumieo® overlay manages the balance of efficiency and aesthetics
- Linear arrayed LED modules provide diffused and effective illumination
- IC Rated
- cETL_{US} listed for damp locations up to 67 watts

DIMENSIONS

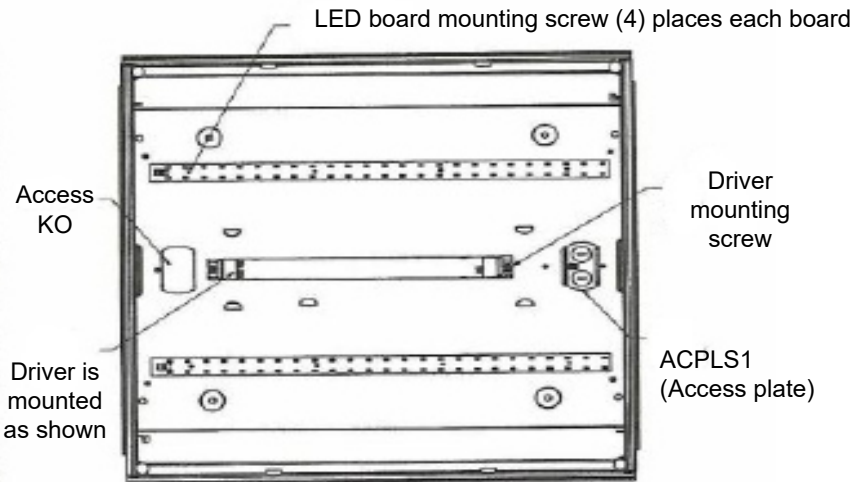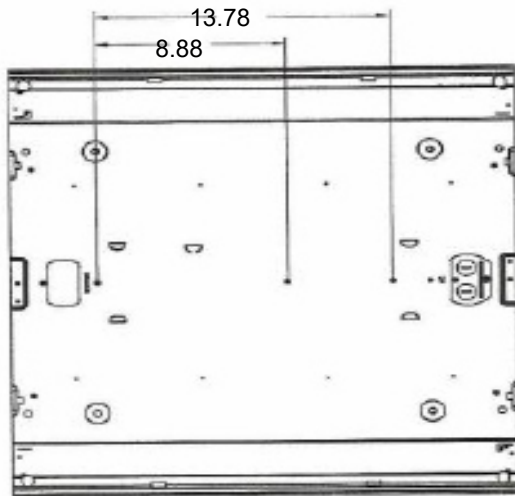

Dimensions and specifications subject to change without notice.








JOB NAME:

CAT#:

TYPE:

DIMENSIONS

Cross Section

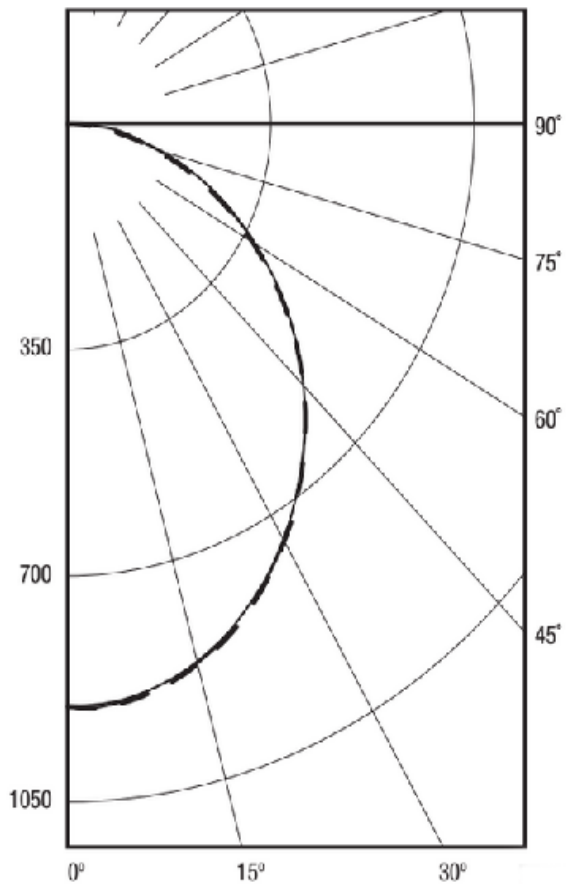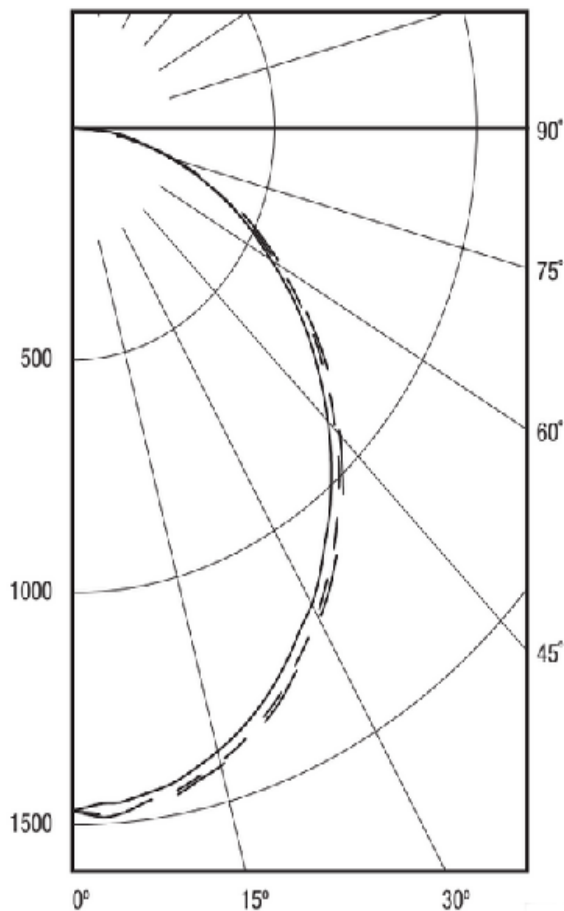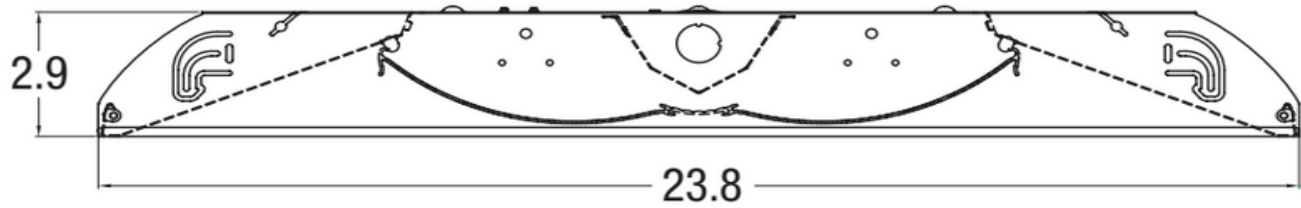

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SKY 22 LED 20 DMV 30 EM

SKY		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. COLOR TEMP		7. EMERGENCY (O) ¹	
SKY	22 2x2	LED	2x2		DMV	120-277V Multivolt 0-10V Dimmable	30	3000K	EM	Battery Backup 10W 1200 Lumens*
	24 2x4		20	20 Watts 2455 Lumens			35	3500K		
			24	24 Watts 3035 Lumens	SDMV	Step dimming Multivolt	40	4000K	EM5	Battery Backup 5W 600 Lumens*
			28	28 Watts 3510 Lumens			50	5000K		
			32	32 Watts 3935 Lumens	D347V	347VAC 0-10V Dimming			*Estimated Lumens	
			36	36 Watts 4190 Lumens						
			45	45 Watts 4990 Lumens	D120	Triac Dimming 120VAC				
			2x4							
			28	28 Watts 3600 Lumens	D277	Triac Dimming 277VAC				
			31	31 Watts 4055 Lumens						
			35	35 Watts 4560 Lumens						
			40	40 Watts 5200 Lumens						
			45	45 Watts 5825 Lumens						
			50	50 Watts 6455 Lumens						
			55	55 Watts 6975 Lumens						
			60	60 Watts 7355 Lumens						

DLC INFORMATION

DLC Listed Models	
SKY22-LED20DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED24DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED28DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED32DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED36DMVxx	xx = Color Temp 30,35,40,50
SKY24-LED28DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED35DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED40DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED45DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED50DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED55DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED60DMVxx (EM)	xx = Color Temp 30,35,40,50



Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

