



Texas Fluorescents  
Reinvented

CATALOG# : \_\_\_\_\_

PROJECT : \_\_\_\_\_

TYPE : \_\_\_\_\_

# Series UDLL

## LED Dual Basket

The low-profile, dual-basket UDLL Series LED Dual Basket fixture offers an ever-pleasing aesthetic. It is designed to maximize efficiency and minimize LED glare, creating a soft “sky light” appearance for modern spaces. Dual baskets yield a slightly wider distribution.

### CONSTRUCTION

Housing is die-formed and embossed 20-gauge steel. Luminaire body finish is high-reflectance baked white enamel, with matte white, linear ribbed reflectors. Wiring knockouts are provided on the back of housing.

### MOUNTING

Recessed or surface mount



### DIMENSIONS

22L - 24"L x 24"W x 3.25"H

24L - 48"L x 24"W x 3.25"H

### FEATURES & BENEFITS

- Casts a softened 'sky light' appearance in modern office spaces
- Matte white reflective surfaces for soft, uniform light distribution
- For use in recessed inverted T-bar or grid ceilings
- Multiple Kelvin temperatures available (3000K, 3500K, 4000K, 5000K)
- Variety of lumen packages/wattages available via use of programmable drivers
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277VAC standard, 120V ELV/TRIAC optional
- Power factor >0.90
- IC Rated for dry and damp locations
- Emergency battery backup available
- 5 year warranty





Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series UDLL

## LED Dual Basket

### ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENS MATERIAL	LENGTH	W		L		DRIVER		COLOR	
			W	L	W	L	DRIVER	DRIVER	COLOR	COLOR
UD Dual Basket Grid Mount	LL Linear Ribbed Lens	22L 24"	J28W3200L	28 Watts, 3200 Lumens	DMV	0-10V Dimming	30K	3000K		
	PF Perforated basket								J35W4200L	35 Watts, 4200 Lumens
SHUD Dual Basket Surface Mount	PF Perforated basket	24L 48"	J48W6000L	48 Watts, 6000 Lumens	D1MV	0-10V Dimming (dim to 1%)	40K	4000K		
			J57W7100L	57 Watts, 7100 Lumens					50K	5000K


CRI**		OPTIONS			
Blank	80 CRI	WP	6 ft. 3 wire 18 gauge whip	EM12	12W Emergency battery backup (remote only)
90	90 CRI	WP4	6 ft. 4 wire 18 gauge whip (non dimming EM)	EM20	20W Emergency battery backup (remote only)
		WP5W	6 ft. 5 wire 18 gauge whip	FIK2x2	2x2 Frame-in-kit
		WP6W	6 ft. 6 wire 18 gauge whip (dimming EM)	FIK2x4	2x4 Frame-in-kit
		EM	Integrated 10W Emergency battery backup		

Note:  
 \*Programmable LED drivers allow custom configured wattages and corresponding lumens.  
 \*\* Consult factory for 90 CRI 5000K availability.  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.


**DRAWINGS & IMAGES**

**BACK**


**2X2**

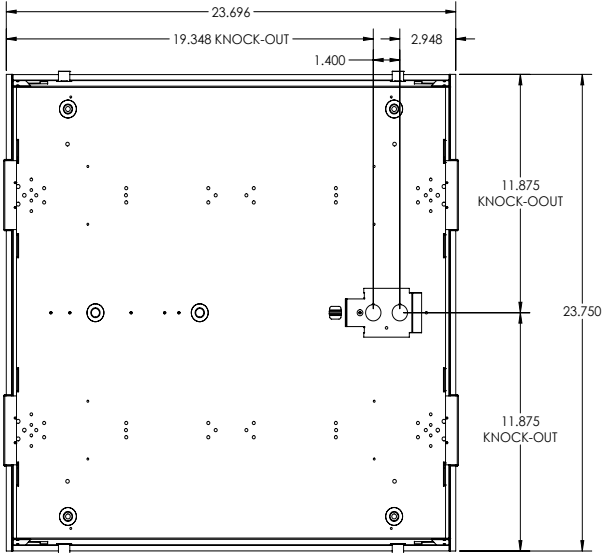

**2X4**


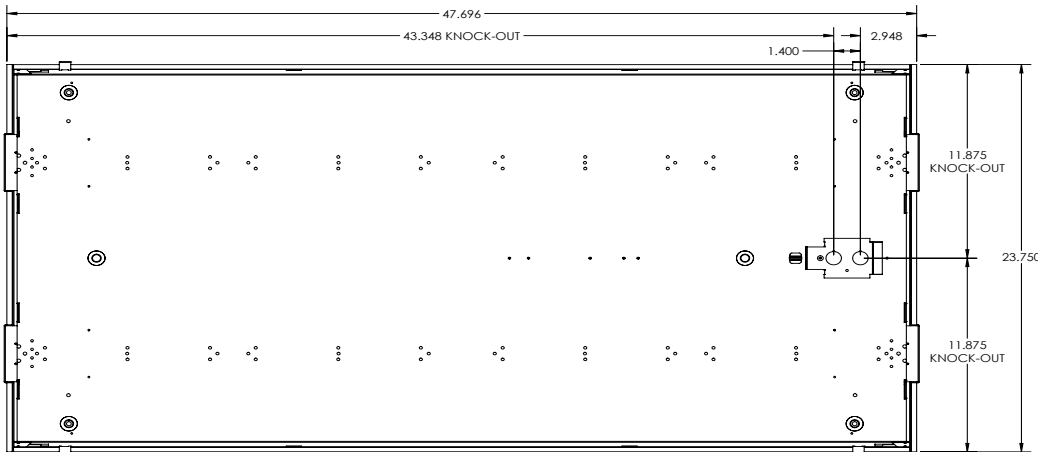


**END**

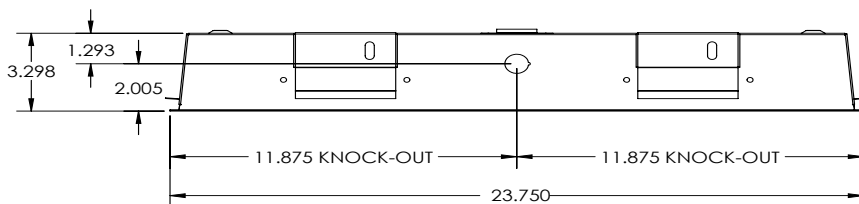

### PHOTOMETRICS



#### 2X2 - UDLL22LJ28W3200LDMV40K

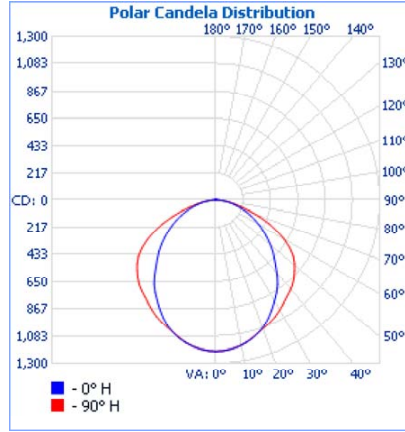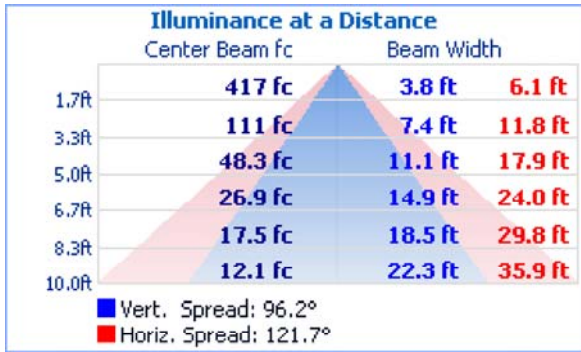

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	900.7	27.7%
0-40	1,458.4	44.8%
0-60	2,572.9	79.1%
60-90	666.7	20.5%
70-100	266.9	8.2%
90-120	4.0	0.1%
0-90	3,239.6	99.6%
90-180	13.4	0.4%
0-180	3,253.0	100%

#### 2X4 - UDLL24LJ48W6000LDMV40K

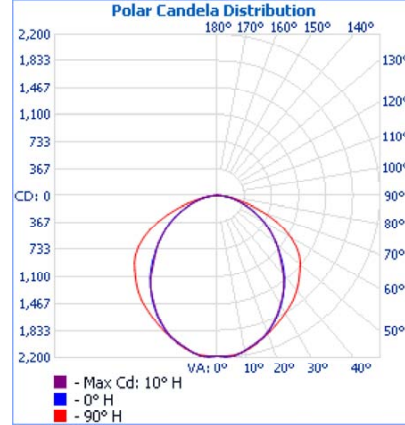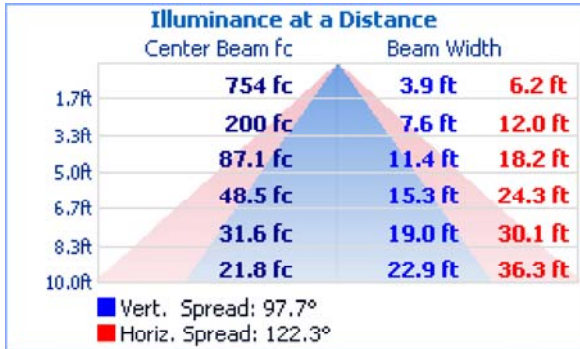

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,656.6	27.5%
0-40	2,683.6	44.5%
0-60	4,740.6	78.6%
60-90	1,286.6	21.3%
70-100	528.7	8.8%
90-120	1.7	0%
0-90	6,027.2	99.9%
90-180	3.5	0.1%
0-180	6,030.7	100%