

CATALOG#:

PROJECT:

TYPE:

# Series WLIN

## Direct/Indirect Wall Mount

Specification grade, low profile direct/indirect wall mount with up and forward throw optics, the WLIN is a sleek wall mount companion to the pendant mount indirect LIN. This wall mount is ideal for brightening perimeters of offices or spectacular wall lighiting systems for corridors.

#### CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

#### **MOUNTING**

Wall bracket mount

#### **TYPICAL OPTIONS & ACCESSORIES**

Options of drivers and custom colors. Companion wall mount fixture to the LIN Series Direct/Indirect pendant.

#### **DIMENSIONS**

5.03"W x 48.0"L x 2.68"Dp 5.03"W x 96.0"L x 2.68"Dp Tandems

#### **FEATURES & BENEFITS**

- · Continuous row mounting
- · Post painted powder coat finish
- White, standard. Custom colors available.
- · Suitable for dry and damp locations
- 50.000 hrs of L70 LED life
- · CRI >80
- 0-10 Volts dimmable 120-277V
- · Power factor 0.99
- 5 year warranty








Reinvented


| CATALOG#: |  |  |
|-----------|--|--|
| PROJECT:  |  |  |
| TYPE:     |  |  |


# Series WLIN Direct/Indirect Wall Mount

#### **DRAWINGS & IMAGES**


#### 48L





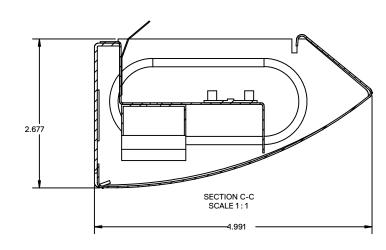

#### 96L

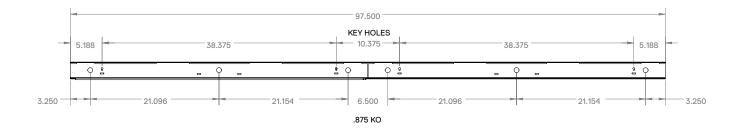

### **Mounting Option**



Mounted on Ceiling



Mounted on Wall



| CATALOG | <b>#</b> : |  |  |
|---------|------------|--|--|
| PROJECT |            |  |  |

TYPE:

Series WLIN
Direct/Indirect Wall Mount

#### **ORDER INFORMATION**

#### 4 Ft.

| SERIES | ВС                   | DDY STYLE                                   | S   | IZE | WATTAG                    | GE & LUMENS | ENS DRIVER  |  | COLOR                    |                                  | FINISH     |                  |
|--------|----------------------|---|-----|-----|---------------------------|-------------|-------------|--|--------------------------|----------------------------------|------------|------------------|
|        |                      |   |     |     |                           |             |             |  |                          |                                  |            |                  |
| WLIN   | PF<br>SD<br>MW<br>LV | Perforated<br>Solid<br>White Lens<br>Louver | 48L | 98" | UZ48W6500L<br>UZ97W13000L | 4800 Lumens | DMV<br>G120 | 0-10V Dimming Triac/ELV Dimming at 120V only | 30K<br>35K<br>40K<br>50K | 3000K<br>3500K<br>4000K<br>5000K | WH **Custo | White (standard) |

|        | CONFIGURATION                                    |
|--------|--|
|        |  |
| Blank  | Standard fixture includes end caps               |
| J      | Joiner-no end caps are furnished joiner sections |
| B<br>E | Beginner Run<br>Ender Run                        |

#### Note

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

<sup>\*</sup>Programmable LED drivers allow custom configured wattages and corresponding lumens.