



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Give your facility a clean and sleek look with this LED premium round lensed strip with reflector. This fixture is sure to enhance any environment, provide energy savings, and give better quality lighting. This fixture is cost effective and makes this perfect for: interior warehouse, retail, and utility areas requiring general illumination in a commercial quality strip configuration..



FEATURES & BENEFITS

- End plate doubles as a coupler for continuous row mounting
- Available in 24", 48", and 96" (2', 4', & 8') lengths
- $L_{70} > 50,000$ hrs.
- Min CRI 80
- 5 year warranty.

DIMENSIONS


W x L x H in inches

24 in: 4.25"W x 24.00"L x 3.25"H


48 in: 4.25"W x 48.00"L x 3.25"H

96 in: 4.25"W x 96.00"L x 3.25"H

Reflector W30

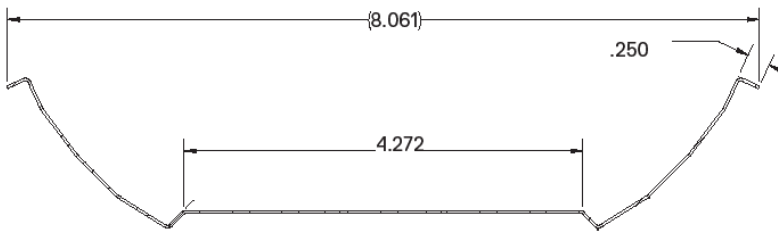

Reflector W35

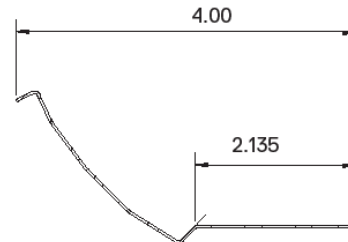

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:


TYPE:

DIMENSIONS


96 inch

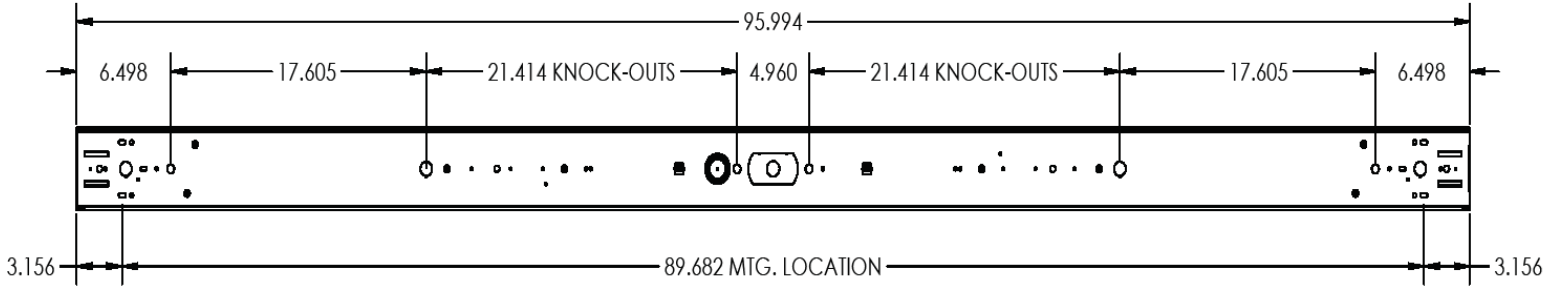

48 inch

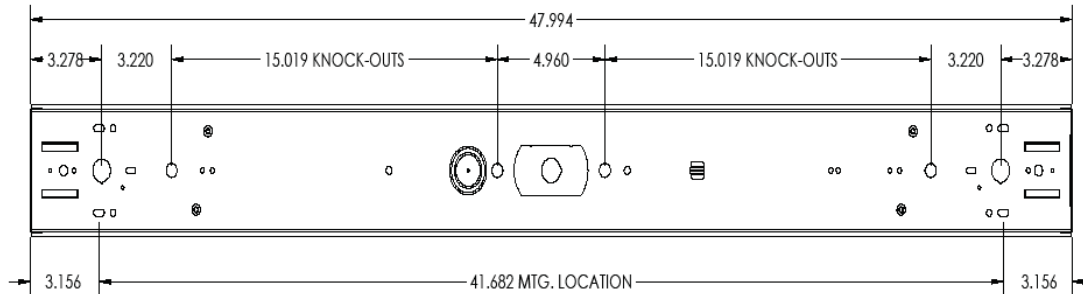

24 inch

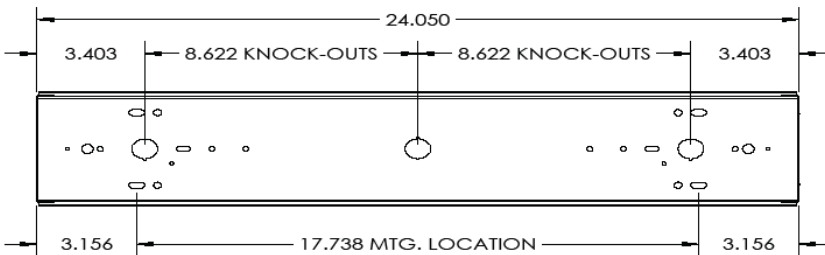

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 1FSF 24 LED 24 DMV MW 40 W30

LED

1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS	7. COLOR TEMP
1FSF	24 24" long	LED	<u>24 in.</u>	DMV 120-277V Multivolt 0-10V Dimmable	Blank No Lens MW Matte White Lens ¹	30 3000K
	48 48" long		18 18 Watts 1980 Lumens			35 3500K
	96 96" long		24 24 Watts 2640 Lumens			40 4000K
			28 28 Watts 3080 Lumens			50 5000K
			30 30 Watts 3300 Lumens			
			<u>48 in.</u>			
			24 24 Watts 2640 Lumens			
			30 30 Watts 3300 Lumens			
			35 35 Watts 3850 Lumens			
			48 48 Watts 5280 Lumens			
			57 57 Watts 6270 Lumens			
			<u>96 in.</u>			
	48 48 Watts 5280 Lumens					
	57 57 Watts 6270 Lumens					
	70 70 Watts 7700 Lumens					
	97 97 Watts 10670 Lumens					
	118 118 Watts 12980 Lumens					

8. REFLECTOR	9. REFLECTOR TYPE	11. EM (O) ²	12. SENSOR (O) ²	13. PLUG IN OPTIONS (O) ²	14. CORD (O) ²
W30 White Symmetrical Reflector	Blank Solid Reflector	EM Emergency Battery 10W ~1300 Lumens	OS Occupancy Sensor	P11 3 wire harness, including white, black, and green PI3D 5 wire harness, including white, black, green, and blue for emergency battery backup	CS 6' cord 18/3 WP 6' whip 3 wire MC ² See cord and whip ordering chart below
W35 White Asymmetrical Reflector					

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage*	Amps (TL Only)*
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V ³ 120 - 120VAC 277 - 277VAC 347 - 347VAC 480 - 480VAC	15 - 15 Amps 20 - 20 Amps

Notes:

¹Matte white lens has ~ 10% light loss

²(O) is Optional

³Not available with "TL" or "P"

Dimensions and specifications subject to change without notice.

