



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Side mounted LED strip fixtures. For use in indoor applications with restricted space, where shallow design, high performance and ease of installation are required. Designed for cove, valance and display lighting.


Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end caps may be butted together for continuous row mounting. Snap-on ballast covers for simple installation and maintenance. Single wireway cover. Knockouts are provided for flexible conduit attachment. Listed by and bears _cETL_{US} label.




FEATURES & BENEFITS

- Side mounted LEDs
- Snap together design
- Low profile housing
- Available in lengths from 18 to 96 inches - (1.5', 2', 3', 4', 6', 8' lengths)
- Single sided or double sided units available
- Single or continuous row mounting capability
- Steel housing and ends with white enamel finish
- _cETL_{US} listed for damp location

DIMENSIONS

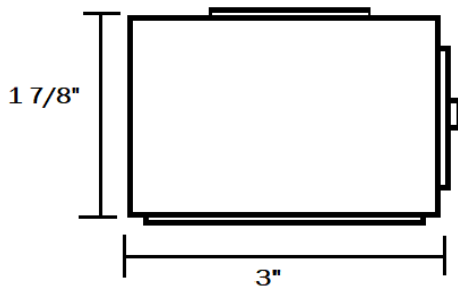

1 Light

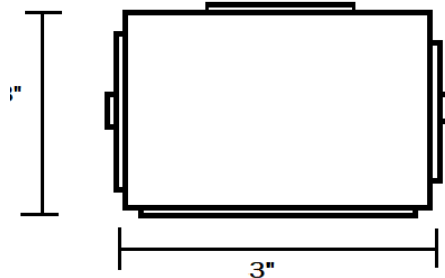

2 Light

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 42SC 18 LED 1S 12 DMV

42SC		LED			
1. SERIES	2. LENGTH	3. GEAR	4. SIDE LIGHT	5. WATTAGE	6. DRIVER
42SC	18 18" 24 24" 36 36" 48 48" 72 72" 96 96"	LED	1S 1 side lit 2S 2 side lit	12 12 Watts 24 24 Watts 36 36 Watts H67 67 Watts	DMV 120-277V Multivolt 0-10V Dimmable MV Multivolt 120-277VAC SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming 347VAC D347V 347VAC 0-10V Dimming TDMV Triac Dimming 120-277VAC D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC

*See chart below for whip & cord ordering options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

Dimensions and specifications subject to change without notice.

