

JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Side mounted LED strip fixtures. For use in indoor applications with restricted space, where shallow design, high performance and ease of installation are required. Designed for cove, valance and display lighting.


Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end caps may be butted together for continuous row mounting. Snap-on ballast covers for simple installation and maintenance. Single wireway cover. Knockouts are provided for flexible conduit attachment.



FEATURES & BENEFITS

- Side mounted LED boards
- Snap together design
- Low profile housing
- Available lengths 48" and 96"
- Single sided or double sided units available
- Single or continuous row mounting capability
- Steel housing and ends with white enamel finish

DIMENSIONS

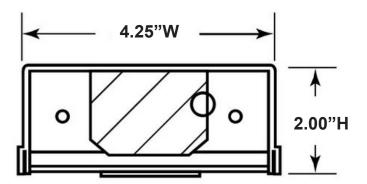

Dimensions and specifications subject to change without notice.



800-444-WATT (9288) WWW.MOBERN.COM 2055 LUNA RD., STE. 142 CARROLLTON, TX 75006 © COPYRIGHT 2008-21 MOBERN LIGHTING COMPANY



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 44SC 1S 48 LED 35 DMV 30 EM OS

44SC			LED				
1. SERIES	2. CONFIGURATIONS	3. LENGTH	4. GEAR	5. WA	TTAGE/LUMENS	6. DRIV	ER
44SC	1S 1 Side Illumination2S 2 Side Illumination	48 48" 96 96"	LED	15 48" 35 35 watts, 5350 lumens 38 38 watts, 5835 lumens 42 42 watts, 6630 lumens 48 48 watts, 7450 lumens 56 56 watts, 8430 lumens 70 70 watts, 10700 lumens 76 76 watts, 11670 lumens 84 84 watts, 12620 lumens 112 112 watts, 16860 lumens 66 66 watts, 10182.5 lumens 70 70 watts, 11080 lumens 70 70 watts, 12620 lumens 112 122 watts, 6630 lumens 66 66 watts, 10182.5 lumens 70 70 watts, 11820 lumens 70 70 watts, 13200 lumens 84 84 watts, 13200 lumens 84 84 watts, 13200 lumens 132 132 watts, 20365 lumens 138 138 watts, 21210 lumens	DMV120-277 Multivolt 0-10V DimmingSDMVStep Dimming MultivoltDHV347-480VAC 0-10V DimmingD347V347VAC 0-10V DimmingD120Triac Dimming 120VACD277Triac Dimming 277VAC	0-10V Dimming Step Dimming Multivolt 347-480VAC 0-10V Dimming 347VAC 0-10V Dimming Triac Dimming 120VAC	

7. COLOR TEMP		8. EMERGENCY		9. SE	9. SENSOR		
30 35 40 50	3000k 3500k 4000k 5000k	EM EM5	Emergency Battery Pack ~1600 Lumens Emergency Battery pack ~800 Lumens	OS	Occupancy Sensor		

Dimensions and specifications subject to change without notice.