

JOB NAME:

CAT#:

TYPE:

APPLICATIONS




The CPYRA provides exceptional glare control and wide distribution. The rounded shape ensures good impact strength while maintaining a pleasant appearance. This fixture is ideally suited for canopy, parking garage, storage areas, shopping area walkways, entryways, and low level security.






FEATURES & BENEFITS

- Sealed die-cast profile for indoor and outdoor applications
- Replaces 100W MH to 175W MH
- Optional bi-level motion sensor
- Ambient operating temperature -40°C to 45°C (-40°F to 113°F)
- cUL_{US} listed
- 5 year warranty

DIMENSIONS

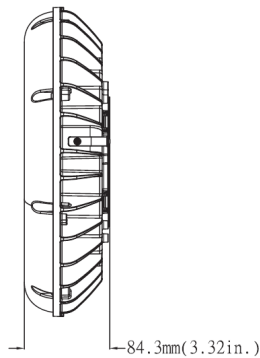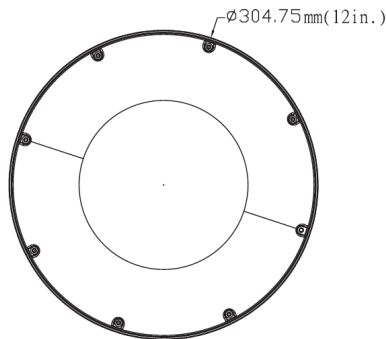

WITHOUT SENSOR

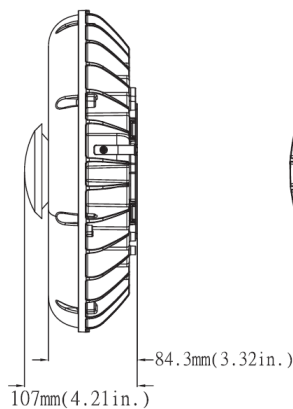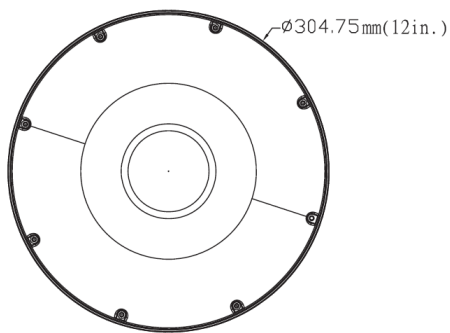

WITH SENSOR

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

DIMENSIONS

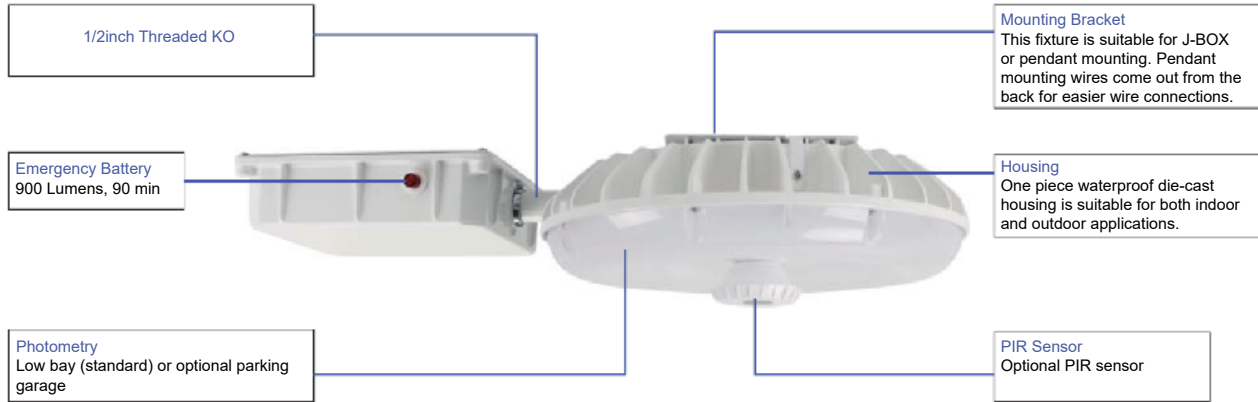

ORDERING

EXAMPLE: CPYRA 12 LED 30 DMV WH 40 OS EM

CPYRA	12	LED		WH						
1. SERIES	2. SIZE	3. DISTRIBUTION		4. GEAR	5. WATTAGE/LUMENS ¹		6. DRIVER		7. FINISH	
CPYRA	12 12" Diameter	(Blank)	Low Bay	LED	30	30 Watts 3800 Lumens	DMV	0-10V Dimming 120-277VAC Multivolt	WH	White
		PG	Parking Garage		45	45 Watts 5500 Lumens				
					60	60 Watts 7600 Lumens				

OS		EM	
8. COLOR TEMP	9. SENSOR	10. EM	
40 4000K ³	OS Occupancy sensor	EM	8 Watt 950 Lumen Battery Backup
50 5000K			

DLC Listed Fixtures		
Model Number	Options	DLC Listing
CPYRA12PG-LED45DMVWH40	OS	Premium
CPYRA12PG-LED45DMVWH50	OS	Premium

NOTES:

¹Lumens at 5000K w/ low bay distribution

²Consult for other options

³Special order only



Dimensions and specifications subject to change without notice.




JOB NAME:

CAT#:

TYPE:

PHOTOMETRICS

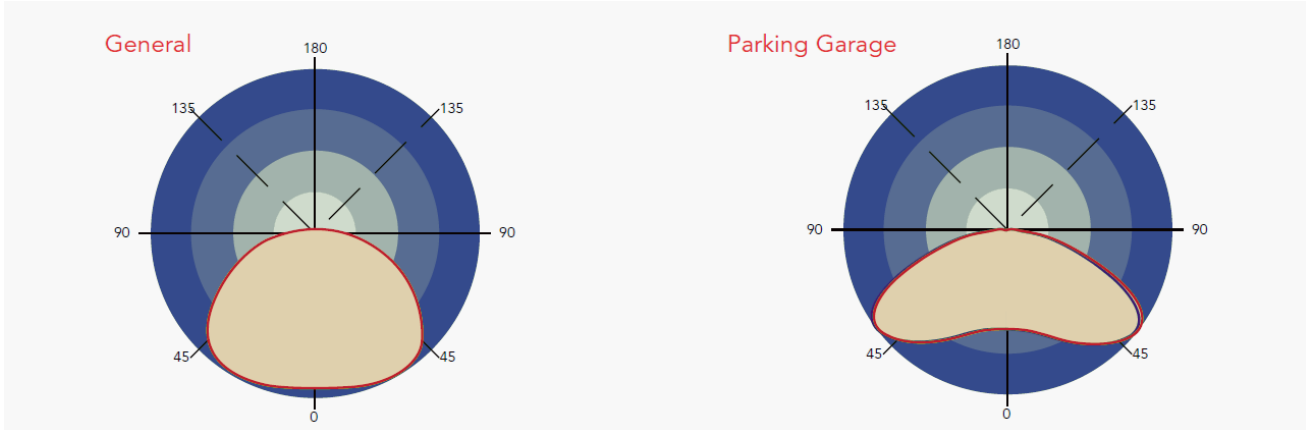

Dimensions and specifications subject to change without notice.

