



JOB NAME:

CAT#:

TYPE:

**FEATURES & BENEFITS**

- Wall or ceiling mount
- White powder coated aluminum base
- UL listed for wet locations
- Available in LED & incandescent

**Small (WSPC)**




**Medium (WMPC)**




**DIMENSIONS**

**WSPC**

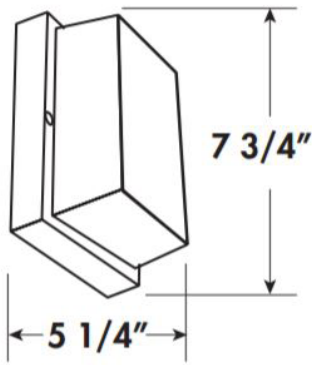

**WMPC**

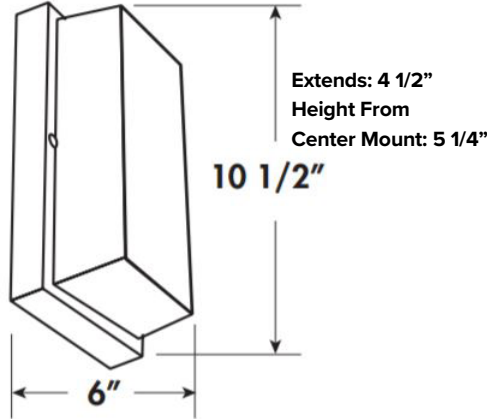

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: FS112 LE800 W W F

**LE800**

**W**

1. STYLE	2. LIGHT SOURCE	3. COLOR TEMP	4. BODY	5. DIFFUSER
<b>FS112</b> Small Utility Light	<b>LE800</b> 13W Power Input, CRI 80 (TYP) >65 Lumens Per Watt, 120V	<b>W</b> 3000K <b>C</b> 4000K	<b>W</b> White	<b>F</b> Glare Reduced Frost Prismatic (Acrylic) <b>C</b> Clear (Acrylic) <b>P</b> Clear (Polycarbonate)
<b>FS113</b> Medium Utility Light	Dimmable			

**ORDERING (INCANDESCENT)**

EXAMPLE: FS112 I40 W C LWE

**I40**

1. STYLE	2. LIGHT SOURCE	3. BODY	4. DIFFUSER	5. LAMPING (O)'
<b>FS112</b> Small Utility Light	<b>I40</b> 1 X 40W Max	<b>W</b> White	<b>F</b> Glare Reduced Frost Prismatic (Acrylic) <b>C</b> Clear (Acrylic) <b>P</b> Clear (Polycarbonate)	<b>LWE</b> A19/E26, 3000K <b>LCE</b> A19/E26, 4000K
<b>FS113</b> Medium Utility Light				

Dimensions and specifications subject to change without notice.

