

L44IR LED

Pendant/Surface/Recessed Mount LED Indirect Radiant Linear Fixture

JOB NAME:

CAT#:

TYPE:

APPLICATIONS


The linear L44IR LED linear fixture is for distinctive architectural lighting plans. Ideal for hotels, apartments, corridors, lobbies and office areas. The L44IR series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS


- Fixtures can be surface mounted, recessed mounted or pendant hung by stem or cable
- Housing is die-formed and welded 22-gauge cold-rolled steel
- Exterior-accessible 1/4-20 holes allow for fast and easy pendant mounting with no need to open the fixture
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- ETL_{us} listed for damp location

Side View

DIMENSIONS

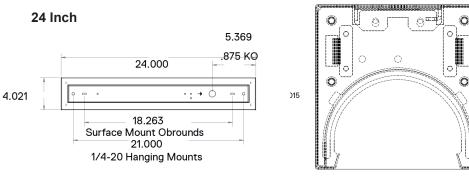

48 Inch

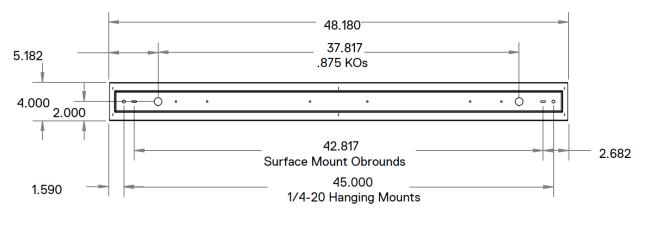



Dimensions and specifications subject to change without notice.

4 021



L44IR LED Pendant/Surface/Recessed Mount **LED Indirect Radiant Linear Fixture**


JOB NAME:

CAT#:

TYPE:

DIMENSIONS

96 Inch

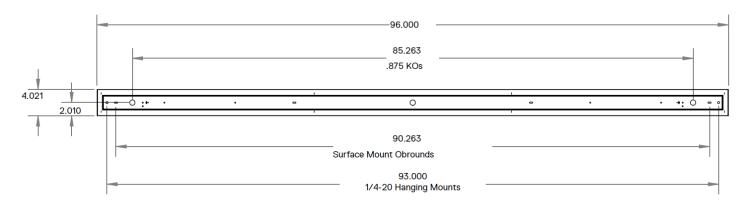

ORDERING

EXAMPLE: L44IR R 48 LED 25 DMV WH 30 HC421WH PI1

LED

1. SERIES		2. MOUNTING		3.	3. LENGTH		4. GEAR 5.		WATTAGE/LUMENS		6. DRIVER			7. FINISH		
L44IR	LED Indirect Radiant Linear Fixture	RR	Recessed Recessed Flanged Recessed Flangeless Appearance Wall Mount Surface Pendant	48 96	24" 48" 96"		LED	25 50 100	25W 50W	24 in. 2000 Lumens 48 in. 4000 Lumens 96 in. V 8000 Lumens	DMV SDMV	120-277V Multivolt 0-10V Dimmable Step dimm Multivolt		WH SL BK	White Silver Black	
B. COLOR TEMP		9. HANGING KIT(O) ¹						10. PLUG IN(O) ¹				11. CONFIGURATION				
30 35	3000K 3500K			Cable kit w/ 6' cable & 3 wire power feed cable incl. w/ white canopy			PI1	3 wire harness, and green	including wh	nite, black	BLAI -B		Individual Beginner Run			
40 50	4000K 5000K	HC	421WH5W		Cable kit w/ 6' cable & 5 wire power feed cable incl. w/ white canopy			PI2	,	ess, including white, black, lue for emergency backup		-E -J		Ender Run Joiner		
	5000K	HC	422WH		feed ca		e & 3 wire cl.w/ white		PI3D	5 wire harness, green, violet and		nite, black,				
		HC	422WH5W		feed ca		e & 5 wire cl. w/ white									
NOTES:																
O is opti	onal															
												lE			Buy American Act & 1	
Dimensio	ons and specifica	ations	s subject to ch	ange wit	hout no	otice.							ISTED		Recovery and Reinvo	

