



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The linear L44IR LED linear fixture is for distinctive architectural lighting plans. Ideal for hotels, apartments, corridors, lobbies and office areas. The L44IR series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS



- Housing is die-formed and welded 22-gauge cold-rolled steel
- Exterior-accessible 1/4-20 holes allow for fast and easy pendant mounting with no need to open the fixture
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- _cETL_{US} listed for damp location




Side View

DIMENSIONS

24 Inch

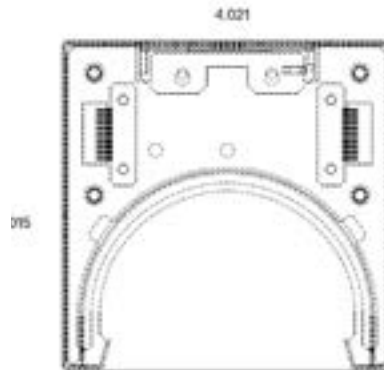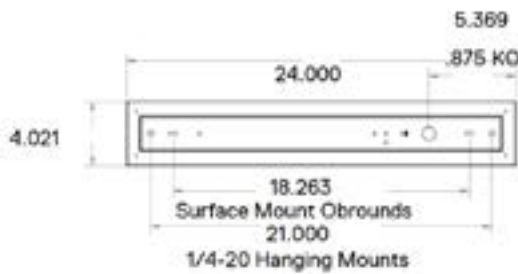

48 Inch

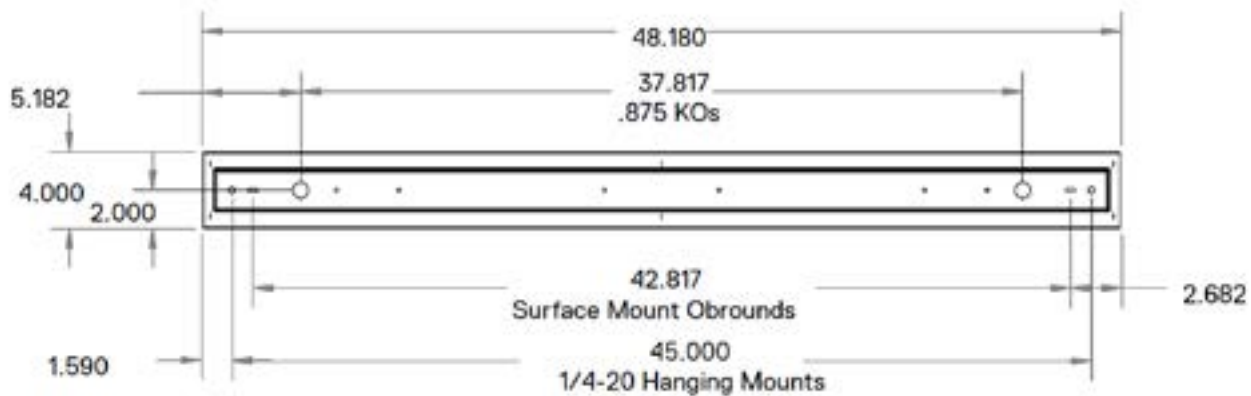

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

DIMENSIONS

96 Inch

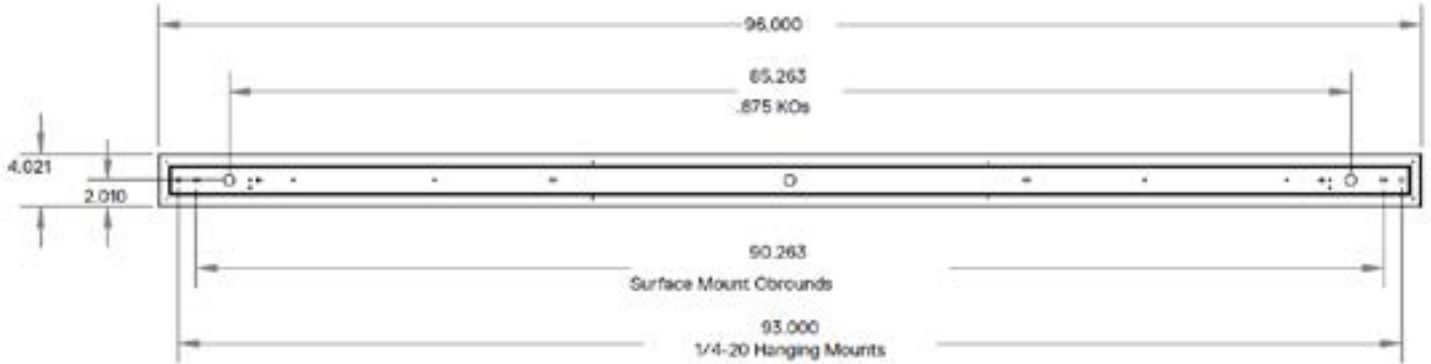

ORDERING

EXAMPLE: L44IRS 48 LED 25 DMV WH 30 EM SS

L44IR		S	LED				7. FINISH	
1. SERIES	2. MOUNTING	3. LENGTH	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER			
L44IR LED Indirect Radiant Linear Fixture	S Surface	24 24" 48 48" 96 96"	LED	24 in. 25 25W 2000 Lumens 48 in. 50 50W 4000 Lumens 96 in. 100 100W 8000 Lumens	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt	WH White SI Silver BK Black		
8. CRI	9. COLOR TEMP	10. EMERGENCY(O)?		11. SENSOR(O)?		12. CONFIGURATION		
Blank 80 9 90	30 3000K 35 3500K 40 4000K 50 5000K	EM Emergency Battery Pack 10W ~ 1700 lumens EM5 Emergency Battery Pack 5W ~ 850 Lumens	SS Integral Occupancy Sensor SNS200 ALC Qualified	BLANK Individual -B Beginner Run -E Ender Run -J Joiner				

Note:
(O) is optional

Dimensions and specifications subject to change without notice.

