



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Specification grade, low profile direct/indirect wall mount with up and forward throw optics, a sleek wall mount companion to the pendant mount indirect. This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors. Matches with our LI Series for a consistent look.

Housing is die-formed and embossed code 20 gauge steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

FEATURES & BENEFITS


- Continuous row mounting
- Post Painted Powder Coat finish
- White standard, custom colors are available
- Wall bracket mount
- CETLUS Listed for damp locations



DIMENSIONS


4-FOOT MODEL

TOP VIEW




8-FOOT MODEL

TOP VIEW



END VIEW

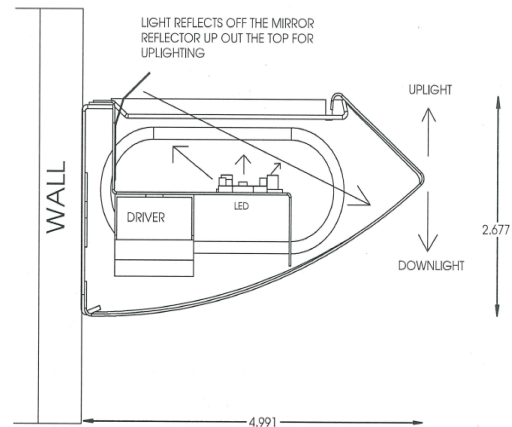

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LIW MP 48 LED 32 DMV WH 30

LIW		LED					7. FINISH	
1. SERIES	2. BODY TYPE	3. SIZE	4. GEAR	5. WATTAGE/LUMENS		6. DRIVER		
LIW LED Direct/ Indirect Wall Mount	MP Perforated	48 48"	LED	4 ft.		DMV 120-277V Multivolt 0-10V Dimmable	WH White (std.)	
	MS White Lens	96 96"		32 32 Watts 3450 Lumens	BK Black			
	MB Louver			48 48 Watts 4800 Lumens	SL Silver			
	MN Solid			57 57 Watts 5400 Lumens	BZ Bronze			
				8 ft.				
				48 48 Watts 4800 Lumens				
				97 97 Watts 9600 Lumens				
				114 114 Watts 10800 Lumens				

8. COLOR TEMP	9. EMERGENCY(O) ¹	10. CONFIGURATION
30 3000K	EM Emergency Battery Pack 10W ~1300 Lumens	Blank End caps included
35 3500K		-J Joiner- No End Caps included
40 4000K	EM7 Emergency Battery Pack 7W ~900 Lumens	
50 5000K	EM5 Emergency Battery Pack 5W ~650 Lumens	

NOTES:

¹O is optional

ACCESSORIES

Lumens are subject to a tolerance of ±10% and not relevant to RGB
 Input wattage can vary depending on options
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

WATTAGE AND LUMENS

Input Wattage	Delivered Lumens									DLC Listed
	Input Wattage	3000K		3500K		4000K		5000K		
		No Lens	FR Lens	No Lens	FR Lens	No Lens	FR Lens	No Lens	FR Lens	
44-24LED18	18	2468	2194	2505	2230	2590	2300	2670	2370	S
44-24LED24	24	3195	2840	3245	2885	3355	2980	3455	3070	S
44-24LED28	28	3530	3140	3585	3190	3705	3295	3815	3395	S
44-24LED30	30	3735	3301	3800	3355	3925	3433	4040	3458	S
44-48LED24	24	3312.2	3046.5	3365	3095	3475	3200	3580	3295	S
44-48LED30	30	4105	3775	4175	3840	4310	3967	4440	4085	S
44-48LED35	35	4685	4305	4760	4380	4920	4525	5065	4660	S
44-48LED48	48	6160	5670	6265	5765	6475	5955	6665	6130	S
44-48LED57	57	7384	6778	7505	6890	7755	7120	7985	7330	S
44-48LED97	97	11120	10760	12170	11210	13580	13095	14480	13920	--
44-96LED24	24	3312.2	3046.5	3365	3095	3475	3200	3580	3295	--
44-96LED48	48	6160	5670	6265	5765	6475	5955	6665	6130	S
44-96LED57	57	7384	6778	7505	6890	7755	7120	7985	7330	S
44-96LED70	70	9370	8615	9525	8760	9840	9050	10135	9320	S
44-96LED97	97	12325	11335	12535	11530	12950	11910	13335	11910	S
44-96LED118	118	14768	13556	15015	13780	15510	14235	15975	14665	S
44-96LED166	166	20750	20100	22110	21860	24000	23760	25960	25140	--

Dimensions and specifications subject to change without notice.