



**JOB NAME:**

**CAT#:**


**TYPE:**

## APPLICATIONS

This architectural, decorative, surface mounted, circline is available in four different sizes. The diffuser is specially designed for direct LED to offer a nice smooth light distribution. This fixture is perfect for lobbies, reception areas, and conference rooms.

## FEATURES & BENEFITS

- Min CRI 80
- PF ≥ 0.9
- Aluminum housing
- L<sub>70</sub> > 50,000 hrs.
- Ambient operating temperature -20°C - 40°C
- 3 year warranty

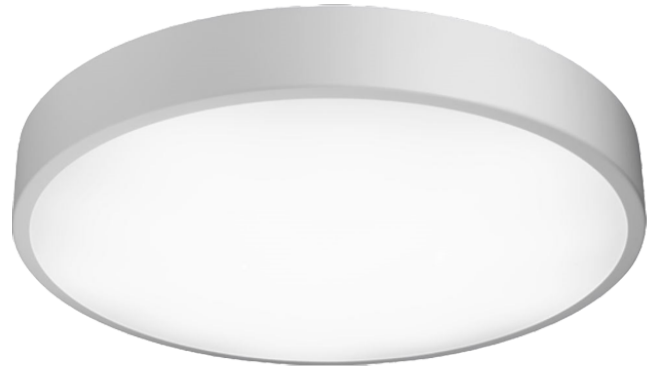

## DIMENSIONS

### Surface

- 18.90" Dia x 4.72" Dp
- 23.62" Dia x 4.72" Dp
- 35.43" Dia x 4.72" Dp
- 47.24" Dia x 4.72" Dp

## ORDERING

EXAMPLE: LL0112M 25W SW 40K

### LL0112M

1. SERIES	2. WATTAGE/LUMENS	3. FINISH	4. COLOR TEMP
<b>LL0112M</b> Surface Mount Round Fixture	<b>25W</b> 25 Watts 2125 Lumens <u>18 in</u>	<b>SW</b> Satin White <b>SB</b> Satin Black	<b>30K</b> 3000K <b>40K</b> 4000K <b>50K</b> 5000K
	<b>40W</b> 40 Watts 3400 Lumens <u>24 in</u>		
	<b>90W</b> 90 Watts 7650 Lumens <u>36 in</u>		
	<b>150W</b> 150 Watts 15300 Lumens <u>48 in</u>		



Dimensions and specifications subject to change without notice.