



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Designed especially for LED, this new LED series provides beautiful glare free lighting from LED arrays. Downlight is shielded with a sleek, rounded frosted ribbed lens. Optional up-light utilizes its own LED array that can be separately switched and is lensed for applications that can be seen from above. Configure for individual lengths in four and eight foot or joined together easily for continuous runs. Pendant mount with adjustable cable kit and available in a variety of off the shelf finishes or custom finishes.



DLC

DLC listed on certain models (refer to chart on page 2)

MOUNTING

Standard 4' adjustable power feed & cable (2 for 4' unit or 8' unit, included).

CONSTRUCTION

Rugged steel housing with anti-rust protection powder coated white. Custom paint finishes available.

TYPICAL OPTIONS AND ACCESSORIES

Emergency driver, occupancy sensors, hanging kits, factory installed dimming, standard and custom colors. Contact factory for additional options.

LISTING




Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.
cETL_{us} listed for damp locations.

DIMENSIONS

W x L x H in inches (mm)

4ft. - 10.8"W x 47"L x 3.94"H

8ft. - 10.8"W x 94"L x 3.94"H

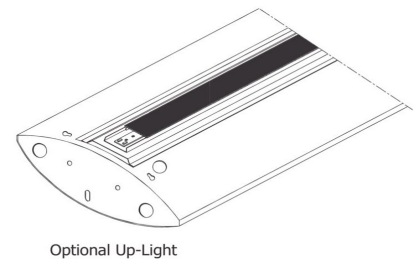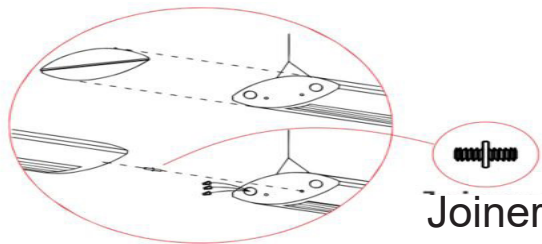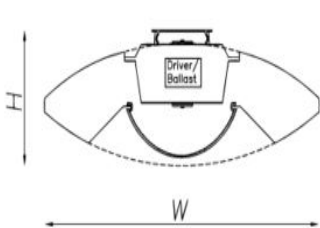

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LPLIA 48 LED 24 DMV WH MW 30 EM PI1 H4W

LPLIA		LED				
1. SERIES	2. SIZE	3. GEAR	4. UPLIGHT/DOWNLIGHT	5. WATTAGE/LUMENS	6. DRIVER	7. LENS
LPLIA LED Wide Area Direct/ Indirect	48 4' nominal	LED	Blank Down-light only	4 ft. Up or Down Only		Blank Frosted Lens Down no upright lens
	96 8' nominal		U¹ Up-light only (Not DLC Listed)	24 24 Watts 3025 Lumens	35 35 Watts 4505 Lumens	
			1U2D¹ 33% Up 66% Down	48 48 Watts 5925 Lumens	SDMV² Step Dimming 120-277VAC 100%-40%	UL Uplight Lens (Uplight options only) (Not DLC Listed)
				60 60 Watts 6900 Lumens		
				4 ft. Uplight & Downlight		
				36 36 Watts 1595L Up 3190L Down		
				48 48 Watts 2155L Up 4310L Down		
				60 60 Watts 2630L Up 5260L Down		
				90 90 Watts 3600L Up 7200L Down		
				8 ft. Up or Down Only		
				48 48 Watts 5925 Lumens		
				70 70 Watts 9010 Lumens		
				96 96 Watts 11850 Lumens		
				120 120 Watts 13800 Lumens		
				8 ft. Uplight & Downlight		
				70 70 Watts 3190L Up 6380L Down		
				96 96 Watts 4310L Up 8620L Down		
				120 120 Watts 5260L Up 10520L Down		
				180 180 Watts 7210L Up 14420L Down		

8. HOUSING COLOR	9. COLOR TEMP	10. EMERGENCY ¹ (O) ³	11. PLUG IN OPTIONS ¹ (O) ³	12. HANGING KIT ¹ (O) ³	13. CONFIGURATION
WH White (std.)	30 3000K	EM 10W, ~1300 lumen battery backup	PI1 3 wire harness, including white, black, and green	H4W 4 Ft. cable kit w/ 3 wire white cord & cable	Blank Individual
SL Metallic Silver	35 3500K	EM7 7W, ~900 lumen battery backup	PI2 4 wire harness, in- cluding white black, green, and blue for emergency battery backup	H4W5 4 Ft. cable kit w/ 5 wire white cord & cable	-B Beginner Run
RD Red	40 4000K	EM5 5W, ~600 lumen battery backup	PI3D 5 wire harness, including white, black, green, violet, and gray	H12W 12 Ft. cable kit w/ 3 wire white cord & cable	-E Ender Run
IN Iron	50 5000K			H12W5 12 Ft. cable kit w/ 5 wire white cord & cable	-J Joiner
BK Black					

NOTES:

¹Consult for Uplight Options
²Consult for Triac and Step Dimming
³O is optional

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

DLC INFORMATION

DLC Standard	
LPLIA48-LED1U2D36DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED1U2D48DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED1U2D60DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED1U2D90DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED24DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED35DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED48DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED60DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED48DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED70DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED96DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED120DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D70DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D96DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D120DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D180DMVWHxx	xx = Color Temp 30, 35, 40, 50



Dimensions and specifications subject to change without notice.

