



JOB NAME: CAT#: TYPE:


## **APPLICATIONS**

This strip light is mainly for commercial use. It can be used in commercial, retail, and institutional applications including gymnasiums, factories, and warehouses.

### **FEATURES & BENEFITS**

- Ambient operating temperature -40°C to 40°C (-40°F to 104°F)
- L<sub>70</sub> > 50,000 hrs
- · Optional sensor and emergency battery backup
- Surface or chain mountable
- Comparable to T8 or T5HO
- 5 year warranty
- $_{\rm c}$ UL $_{\rm us}$  listed for damp locations

### **DIMENSIONS**

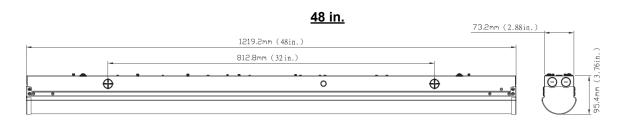

## **Back View**




Dimensions and specifications subject to change without notice.







JOB NAME: CAT#: TYPE:

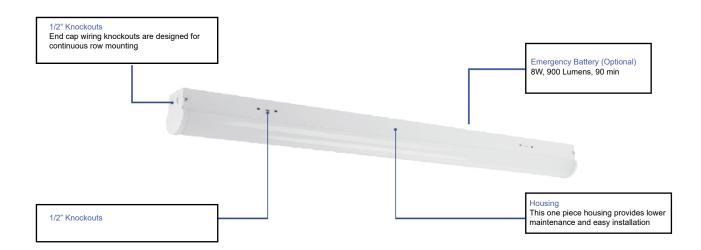

# **ORDERING**

EXAMPLE: LSBR 48 LED 23 DMV 40 EM OS

LSBR		LED				
1. SERIES	2. SIZE <sup>1</sup>	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. COLOR TEMP	7. EMERGENCY(O) <sup>2</sup>
LSBR	48 48" Consult for 96" Option using Joiner Band	LED	48 in. 23 23 Watts 3000 Lumens 35 35 Watts 4650 Lumens 45 45 Watts 6000 Lumens	DMV 0-10V Dimming 120-277VAC Multivolt	<b>40</b> 4000K <b>50</b> 5000K	<b>EM</b> Emergency Battery Backup

8. SENSOR(O)2

**OS** Occupancy Sensor

NOTES:

¹Consult for 96" option ²(O) is optional

Dimensions and specifications subject to change without notice.








JOB NAME: CAT#: TYPE:

## **DIMENSIONS**

A42 Wire guard (4 clips included)
A42W White wire guard (4 clips included)
A349 Replacement clips (QTY 4)
A144-2 (2) V-Hooks & (2) 2ft. Chains

**A411-"X"** (2) S-Hooks & (2) Replace "X" w/ length of chains

## **PHOTOMETRICS**

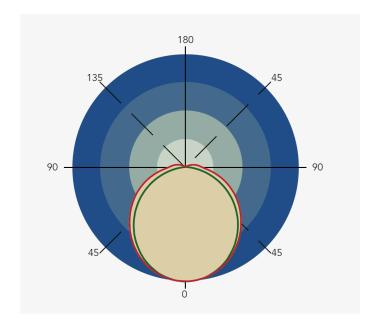



Dimensions and specifications subject to change without notice.