



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS




The MIMDCOWPKSR LED Wall Pack is ideal for security, accent and perimeter lighting. Applications include entrance ways, garages, and commercial buildings. Housing is die-cast aluminum body with a standard bronze finish.

### FEATURES & BENEFITS

- Heavy Duty Die Cast Aluminum Housing
- Min CRI 70
- Ambient operating temperature -40°C to 40°C (-40°F to 104°F)
- Bronze powder-coat finish
- Optional photocell and motion sensor
- Supports emergency battery
- Polycarbonate optical lens with UV stabilizers
- cUL<sub>us</sub> listed for wet locations



### DIMENSIONS

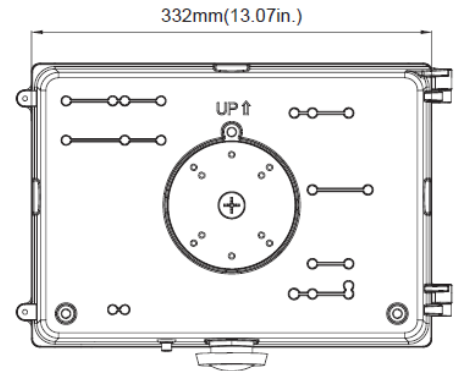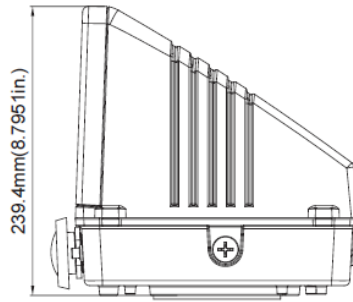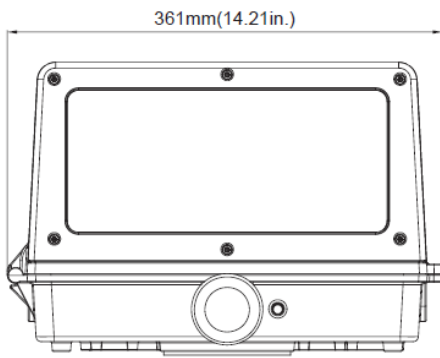

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:



**ORDERING**

MIMDCOWPKSR LED 45 DMV BZ 40 EM OS PC

**MIMDCOWPKSR LED**

1. SERIES	2. GEAR	3. WATTAGE/LUMENS	4. DRIVER	5. FINISH <sup>1</sup>	6. COLOR TEMP	7. EMERGENCY(O) <sup>2</sup>	8. SENSOR(O) <sup>3</sup>
MIMDCOWPKSR	LED	45 45 Watts 4900 Lumens 70 70 Watts 7500 Lumens	DMV 120-277V Multivolt 0-10V Dimmable	BZ Bronze	40 <sup>2</sup> 4000K 50 5000K	EM Emergency Battery Backup	OS Occupancy Sensor

9. PHOTOCELL(O) <sup>3</sup>
PC Photocell

DLC Listed Fixtures			
Model Number	Color Temp	Options	DLC Listing
MIMDCOWPKSR-LED45DMVBZxx	xx= 40,50	EM, PC, OS	Standard
MIMDCOWPKSR-LED70DMVBZxx	xx= 40,50	EM, PC, OS	Standard



**Notes:**

- <sup>1</sup>Consult for other options
- <sup>2</sup>Special Order
- <sup>3</sup>O is Optional



Dimensions and specifications subject to change without notice.




JOB NAME:

CAT#:

TYPE:

**PHOTOMETRICS**

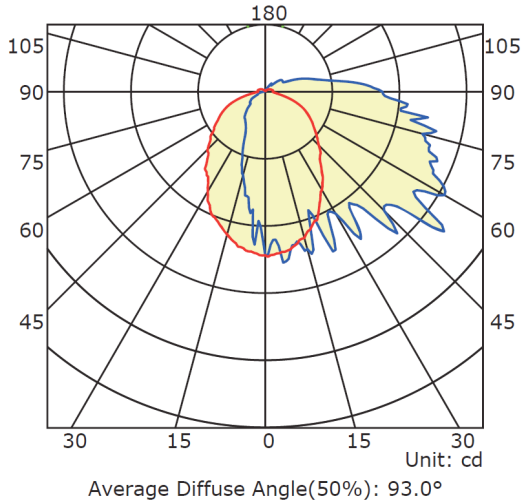

Dimensions and specifications subject to change without notice.

