



JOB NAME:

CAT#:


TYPE:

APPLICATIONS


This full body micro silhouette makes a bold statement with a minimal design in your choice of finish. Scaled to the LED the matte white diffuser surrounds the diodes for soft lighting. This fixture can be surface mounted on wall or ceiling or pendant mounted with a specially engineered cable mounting kit.

FEATURES & BENEFITS

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Clean body - No knock-outs on sides or ends.
- Knockouts on back accept standard electrical fittings (by others). Consult factory for other locations.
- Surface mount or pendant mount; horizontal or vertical
- $L_{70} \geq 60,000$ hrs
- Min CRI 80
- cETL_{US} Listed

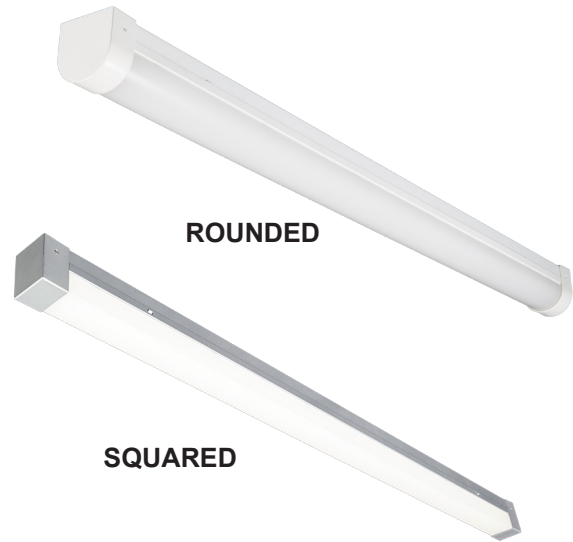

DIMENSIONS

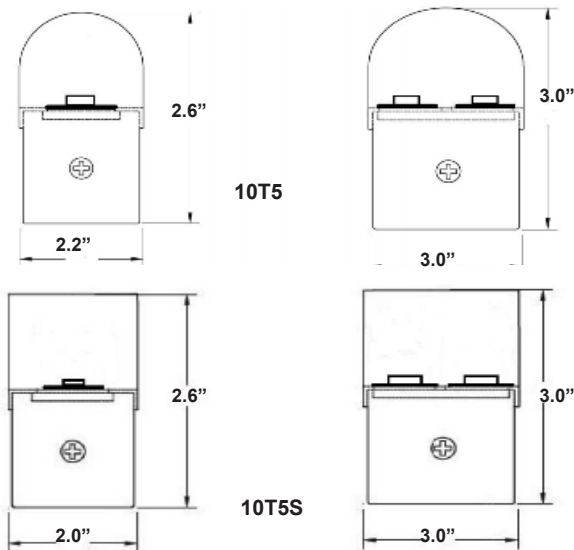

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 10T5 24 LED 12 DMV WH SW 40

LED

1. SERIES	2. WIDTH	3. LENGTH	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER	7. FINISH
10T5 Rounded LED Surface Mount	(Blank) 2" W 3"	24 22.5" 36 34.5" 48 46.25" 96 92"	LED	24 (2" Wide) 12 12 Watts 1080 Lumens 18 18 Watts 1700 Lumens 24 (3" Wide) 24 24 Watts 2160 Lumens 28 28 Watts 2700 Lumens 35 35 Watts 3400 Lumens 36 (2" Wide) 22 22 Watts 1600 Lumens 29 29 Watts 2755 Lumens 36 36 Watts 3240 Lumens 36 (3" Wide) 44 44 Watts 4180 Lumens 58 58 Watts 5510 Lumens 48 (2" Wide) 24 24 Watts 2160 Lumens 28 28 Watts 2520 Lumens 35 36 Watts 3240 Lumens 48 (3" Wide) 32 32 Watts 2880 Lumens 40 40 Watts 4000 Lumens 48 48 Watts 4320 Lumens 57 57 Watts 5400 Lumens 72 72 Watts 7000 Lumens 96 (2" Wide) 32 32 Watts 3200 Lumens 48 48 Watts 4320 Lumens 57 57 Watts 5400 Lumens 72 72 Watts 6480 Lumens 96 (3" Wide) 80 80 Watts 8000 Lumens 114 114 Watts 10250 Lumens 144 144 Watts 12960 Lumens	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	WH White BK Black BN Brushed Nickel BZ Bronze SI Silver

8. LENS	9. COLOR TEMP	10. SENSOR (O) ¹	11. CORD (O) ¹	12. OPTIONS (O) ¹
SW Smooth White FR Frosted	30 3000K 35 3500K 40 4000K 50 5000K	SS Integrated Sensor	CS 6' cord ¹ See cord & whip ordering chart below	EM Emergency Battery Backup

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

ACCESSORIES

- A-HC501WH5W** Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable. Cable included w/ white canopy
- A-HC501BN5W** Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable. Cable included w/ brushed nickel canopy

Notes:
(O) is optional

Dimensions and specifications subject to change without notice.