



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

Premium grade sidecut LED strip fixture using high efficiency T5 Technology. Available in a compact one or two light configurations especially suited for areas with minimal space requirements such as cove lighting, store fixture, signage, under cabinets, closets, display cases, vending machines and confined areas requiring illumination and ease of installation

Housing is die and brake formed from cold rolled steel. One piece folded construction. Finish is high reflectance baked white enamel. End caps may be butted together for continuous row mounting. Knockouts are provided for flexible conduit attachment. Listed by and bears <sub>c</sub>ETL<sub>US</sub> label.





### FEATURES & BENEFITS

- Standard finish is white
- Available with one or two LED configurations
- Available in lengths from 12 to 48 inches - (1', 1.25', 2', 3', 4' lengths)
- Continuous row mounting capability
- Shallow design
- Every fixture is individually tested
- <sub>c</sub>ETL<sub>US</sub> listed for damp location

### DIMENSIONS

Nominal Length	Actual Length A (in.)
1'	11 31/32"
1.25'	14 31/32"
2'	22 7/18"
3'	34 9/32"
4'	46 1/16"

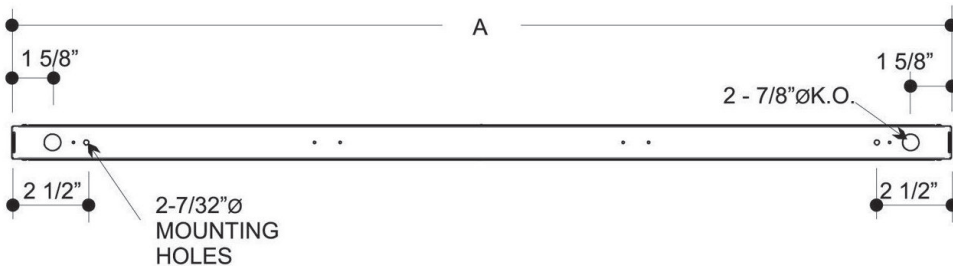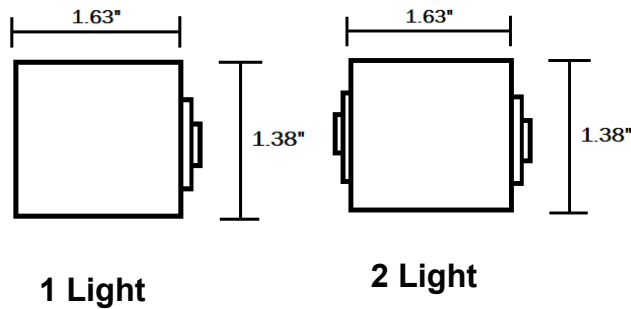

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: 41SC 18 LED 12 DMV 30

**41SC**

1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE	5. DRIVER	6. COLOR TEMP
<b>41SC</b>	<b>18</b> 18" <b>24</b> 24" <b>36</b> 36" <b>48</b> 48" <b>72</b> 72" <b>96</b> 96"	<b>LED</b>	<b>12</b> 12W <b>24</b> 24W <b>36</b> 36W <b>H67</b> 67W	<b>DMV</b> 120-277V Multivolt 0-10V Dimmable <b>MV</b> Multivolt 120-277VAC <b>SDMV</b> Step dimming Multivolt <b>DHV</b> 347-480VAC 0-10V Dimming <b>D347V</b> 347VAC 0-10V Dimming <b>TDMV</b> Triac Dimming 120-277VAC <b>D120</b> Triac Dimming 120VAC <b>D277</b> Triac Dimming 277VAC	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)**

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
<b>WP</b> - Whip <b>CS</b> - Cordset	<b>(Blank)</b> 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	<b>(Blank)</b> 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	<b>(Blank)</b> No Plug <b>P*</b> - Standard Plug <b>TL*</b> - Twist Lock	<b>BK</b> - Black <b>WH</b> - White	<b>(Blank)</b> 120-277V <b>120</b> - 120V <b>277</b> - 277V <b>347</b> - 347V <b>480</b> - 480V	<b>15</b> - 15 Amps <b>20</b> - 20 Amps

Dimensions and specifications subject to change without notice.

