



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Economically designed narrow wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public building where low glare and ease of installation is required.


Housing and ends are die-formed and embossed from cold rolled steel. Inspection knockouts provided for mounting to junction box. Driver cover snaps into place eliminating the need for tools when accessing. Diffuser hinges from either side in a lift and shift manner and is self-centering. End caps may be butted together for continuous row mounting. Knockouts are provided for stem mounting.



FEATURES & BENEFITS

- Min CRI 82
- Corrosion and scratch resistant
- Nominal 9" width with a shallow design
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in lengths from 24 to 48 inches - (2' & 4' lengths)
- Single or continuous row mounting capability
- Surface, stem or chain mountable
- ETL Listed for damp location

DIMENSIONS

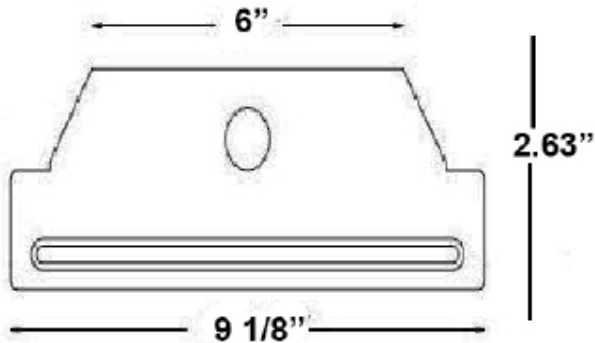

DLC Listed	
770-48LED23DMVxx	xx=30,35,40,50
770-48LED35DMVxx	xx=30,35,40,50
770-48LED48DMVxx	xx=30,35,40,50
770-48LED56DMVxx	xx=30,35,40,50

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 770 24 LED 12 DMV 30 EM WP

770		LED														
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. COLOR TEMP							
770	24 24"	LED	24"		DMV 120-277V Multivolt 0-10V Dimmable	(Blank) Clear Prismatic FR Frosted	30 3000K									
	48 48"		12 12 Watts 1665 Lumens	SDMV Step dimming Multivolt				35 3500K								
			18 18 Watts 2420 Lumens						DHV 347-480VAC 0-10V Dimming	40 4000K						
			24 24 Watts 3135 Lumens								D347V 347VAC 0-10V Dimming	50 5000K				
			28 28 Watts 3465 Lumens										D120 Triac Dimming 120VAC			
			30 30 Watts 3630 Lumens											D277 Triac Dimming 277VAC		
			48"													
			23 23 Watts 2650 Lumens													
			32 32 Watts 3450 Lumens													
			35 35 Watts 3800 Lumens													
			48 48 Watts 5100 Lumens													
			56 56 Watts 6000 Lumens													
	72 72 Watts 8200 Lumens															

9. EM	10. CORD
EM 10W ~1200 Lumen Battery backup	WP 6' Whip 3 Wire
EM7 7W ~840 Lumen Battery backup	
EM5 5W ~600 Lumen Battery backup	

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

ACCESSORIES

Lumens are subject to a tolerance of ±10% and not relevant to RGB
 Input wattage can vary depending on options
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.

