



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS




This heavy duty constructed LED premium round wraparound is ideal for individual or continuous runs with solid ends. It has a low initial cost, and is available in a 48" and 96" lengths. The housing is completely die formed from heavy gauge cold rolled steel, and design embossed ends are locked and secured to the housing. The wireway cover snaps on or off with or without tools for easy assembly.



### FEATURES & BENEFITS

- Surface or pendant mounted
- Completely die formed from heavy gauge cold rolled steel
- Ribbed Linear acrylic diffuser- available in clear or frosted
- Single or continuous row mounting capability
- Min CRI 82
- cETL<sub>US</sub> listed
- 5 year warranty

### DIMENSIONS

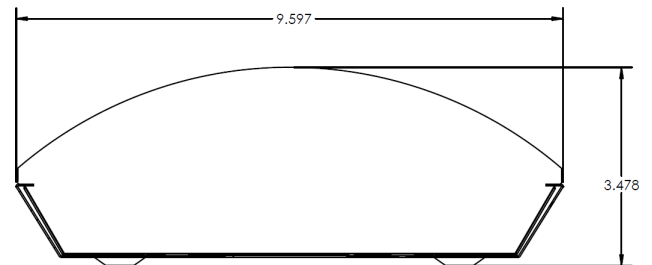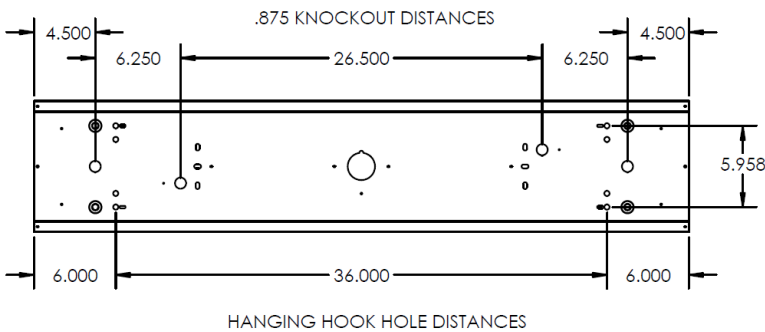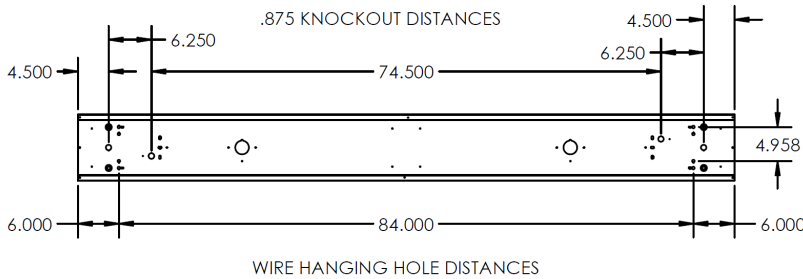

Dimensions and specifications subject to change without notice.



**JOB NAME:**
**CAT#:**
**TYPE:**
**ORDERING**

EXAMPLE: 771 48 LED 32 DMV FR 30 WP EM P12

| 771       |         | LED     |                   |                      |                      |                                      |                           |              |               |            |                             |
|-----------|---------|---------|-------------------|----------------------|----------------------|--------------------------------------|---------------------------|--------------|---------------|------------|-----------------------------|
| 1. SERIES | 2. SIZE | 3. GEAR | 4. WATTAGE/LUMENS |                      | 5. DRIVER            |                                      | 6. LENS                   |              | 7. COLOR TEMP |            |                             |
| 771       | 48 48"  | LED     | <b>48 inch</b>    |                      | <b>DMV</b>           | 120-277V Multivolt<br>0-10V Dimmable | <b>FR</b>                 | Ribbed Frost | <b>30</b>     | 3000K      |                             |
|           | 96 96"  |         | <b>32</b>         | 32 Watts 3450 Lumens |                      |                                      |                           |              | <b>35</b>     | 3500K      |                             |
|           |         |         | <b>48</b>         | 48 Watts 4800 Lumens |                      |                                      |                           |              | <b>40</b>     | 4000K      |                             |
|           |         |         |                   | <b>72</b>            | 72 Watts 7200 Lumens | <b>SDMV</b>                          | Step dimming<br>Multivolt | <b>RL</b>    | Ribbed Linear | <b>50</b>  | 5000K                       |
|           |         |         |                   |                      |                      |                                      |                           |              |               | <b>DHV</b> | 347-480VAC<br>0-10V Dimming |
|           |         |         |                   |                      |                      | <b>D347V</b>                         | 347VAC<br>0-10V Dimming   |              |               |            |                             |
|           |         |         |                   |                      |                      | <b>D120</b>                          | Triac Dimming<br>120VAC   |              |               |            |                             |
|           |         |         |                   |                      |                      | <b>D277</b>                          | Triac Dimming<br>277VAC   |              |               |            |                             |
|           |         |         |                   |                      |                      |                                      |                           |              |               |            |                             |
|           |         |         |                   |                      |                      |                                      |                           |              |               |            |                             |
|           |         |         |                   |                      |                      |                                      |                           |              |               |            |                             |
|           |         |         |                   |                      |                      |                                      |                           |              |               |            |                             |

| 7. CORD                  | 8. EM                                       | 9. PLUG IN OPTIONS   |
|--------------------------|---|--|
| <b>WP</b> 6' Whip 3 Wire | <b>EM</b> 10W ~1200 Lumen<br>Battery backup | <b>PI1</b> 3 wire harness, including white, black, and green                                   |
|                          | <b>EM7</b> 7W ~840 Lumen<br>Battery backup  | <b>PI2</b> 4 wire harness, including white, black, green and blue for emergency battery backup |
|                          | <b>EM5</b> 5W ~600 Lumen<br>Battery backup  | <b>PI3D</b> 5 wire harness, including white, black, green, violet, and gray                    |
|                          | Consult factory for options                 |  |

| **Cord & Whip Ordering Chart (Add to End of Fixture Part Number) |  |  |  |                          |  |                              |
|--|--|--|--|--------------------------|--|------------------------------|
| Part No.   | # of Wires   | Length   | End Fitting  | Finish                   | Voltage*   | Amps* (TL Only)              |
| WP - Whip<br>CS - Cordset  | (Blank) 3 Wire<br>4 - 4 Wire<br>5 - 5 Wire<br>6 - 6 Wire | (Blank) 6 feet<br>8 - 8 feet<br>10 - 10 feet<br>12 - 12 feet<br>15 - 15 feet | (Blank) No Plug<br>P - Standard Plug-120VAC<br>TL - Twist Lock | BK - Black<br>WH - White | (Blank) 120-277V<br>120 - 120V<br>277 - 277V<br>347 - 347V<br>480 - 480V | 15 - 15 Amps<br>20 - 20 Amps |

\* Required for TL options

**ACCESSORIES**

Lumens are subject to a tolerance of  $\pm 10\%$  and not relevant to RGB  
 Input wattage can vary depending on options  
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.

