



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

This series combines the desirable characteristics of the traditional wraparound with an extremely low silhouette to provide a specification luminaire for the conservative budget. This series is engineered to provide comfortable brightness values in the direct glare zone.


Body ends are die formed of 20 gauge cold rolled steel for both rigidity and uniformity. A crystal clear diffuser extruded from 100% virgin acrylic will maintain its color under normal conditions indefinitely. Linear prisms on the interior side walls direct the light ceilingwards, which can then reflect back down. Diffuser is lift and shift for ease of relamping and cleaning and is capable of hanging down from either side of the housing.




### FEATURES & BENEFITS

- Engineered to provide comfortable brightness values in the direct glare zone
- Available in two, four and eight foot lengths. Ideal for schools, stores, and offices
- Min CRI 80
- cETL<sub>us</sub> listed

### DIMENSIONS

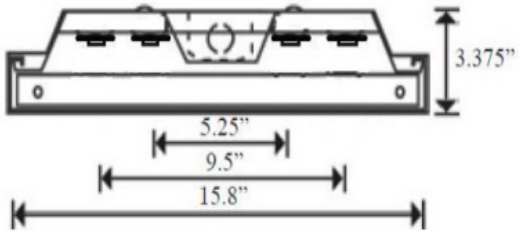

End Views

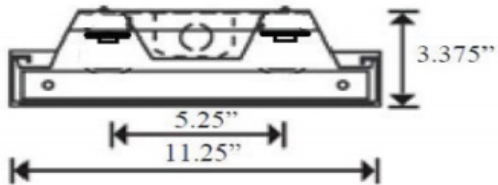

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: 772 24 LED 20 DMV 30 EM

**772**

**LED**

1. SERIES	2. SIZE	3. WIDTH	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER	7. LENS
772	24 24"	(Blank) Standard	LED	<u>2 ft.</u>	DMV 120-277V Multivolt 0-10V Dimmable	(Blank) Clear Prismatic
	48 48"	W Wide				
	96 96"			20 20 Watts 2100 Lumens	SDMV Step dimming Multivolt	SW Smooth White
				24 24 Watts 2500 Lumens		
				28 28 Watts 2800 Lumens		
				30 30 Watts 3060 Lumens		
				<u>2 ft. Wide Only (4 Rows)</u>		
				32 32 Watts 3450 Lumens		
				48 48 Watts 5000 Lumens		
				57 57 Watts 5700 Lumens		
				<u>4 ft. (2 Rows)</u>		
				32 32 Watts 3450 Lumens		
				48 48 Watts 5000 Lumens		
				57 57 Watts 5700 Lumens		
				60 60 Watts 6000 Lumens		
				72 72 Watts 7000 Lumens		
				<u>4 ft. Wide Only (4 Rows)</u>		
				48 48 Watts 5000 Lumens		
				60 60 Watts 5041 Lumens		
				65 65 Watts 7000 Lumens		
				72 72 Watts 8200 Lumens		
				97 97 Watts 9600 Lumens		
				114 114 Watts 10800 Lumens		
				<u>8 ft. (2 Rows)</u>		
				48 48 Watts 5000 Lumens		
				65 60 Watts 6000 Lumens		
				97 97 Watts 9600 Lumens		
				114 114 Watts 10800 Lumens		
8. COLOR TEMP	9. EMERGENCY (O) <sup>1</sup>					
30 3000K	EM	10W ~1200 Lumen				
35 3500K		Battery backup				
40 4000K	EM5	5W ~600 Lumen				
50 5000K		Battery backup				

**Notes:**  
<sup>1</sup>(O) is optional

Dimensions and specifications subject to change without notice.

