



JOB NAME:

CAT#:

TYPE:

APPLICATIONS



The Mobern D2D12-LED dusk to dawn fixture utilizes the latest in LED technology, and provides light output for any environment. It features a power door for easy maintenance, and 3G vibration rated construction. This fixture is ideal for parking lots, loading docks, and warehouses in commercial, farm, or residential areas.

FEATURES & BENEFITS

- Die cast aluminum housing
- Powder coat finish
- Replaces up to 175W MH
- Min CRI 70
- Mounts directly to wall surface or poll with mounting arm kit (sold separately)
- Standard 120-277VAC twist lock photocell included
- $L_{70} \geq 50,000$ hrs.
- THD $\leq 20\%$, PF ≥ 0.9
- Operating Temperature: $-40^{\circ}\text{C} - 45^{\circ}\text{C}$ ($-40^{\circ}\text{F} - 113^{\circ}\text{F}$)
- 5 Year Warranty
- cUL_{us} Listed



DIMENSIONS

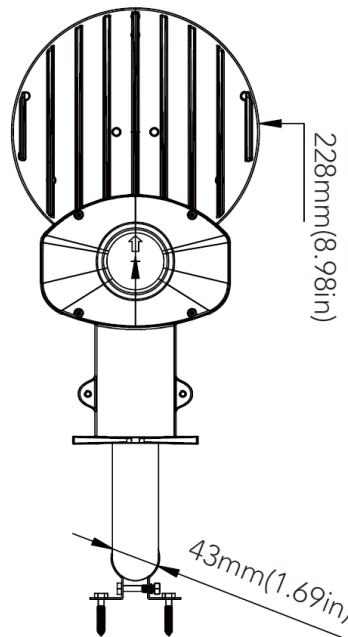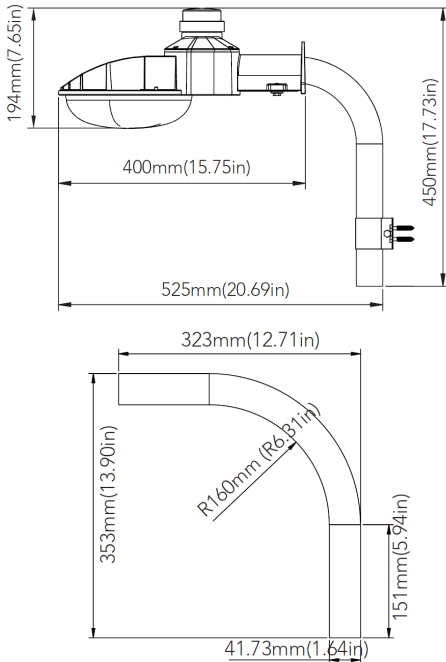

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:





ORDERING

EXAMPLE: D2D12 LED 45 MV BZ 40

D2D12	LED						
1. SERIES	2. GEAR	3. WATTAGE/LUMENS		4. DRIVER	5. FINISH	6. COLOR TEMP	
D2D12 LED Dusk to Dawn	LED	45	45 Watts 6400 Lumens	MV	120-277VAC	BZ	Bronze
		70	70 Watts 9600 Lumens			40	4000K
			*Lumens at 5000K			50	5000K

ACCESSORIES

D2D12ARMKIT Mounting arm kit

	Mounting arm kit USE: For pole mounting
	Photocell USE: Photocell is field installed or pre-installed in factory by requesting

REPLACEMENT PARTS

A-MS-PSUNVB1 120-277VAC twist lock photocell

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:


TYPE:

DLC INFORMATION

DLC Listed Fixtures			
Model Number	Housing Color (hh)	Color Temp (xx)	DLC Listing
D2D12-LED45MVhhxx	hh= BZ, GY	xx= 40,50	Standard
D2D12-LED70MVhhxx	hh= BZ, GY	xx= 40,50	Standard



PHOTOMETRICS

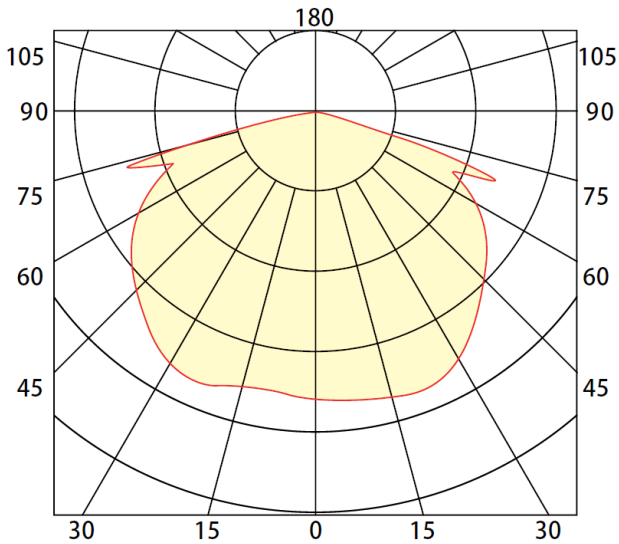

Performance Data						
System Watts	Voltage	CRI	Lumens (4000K)	LPW (4000K)	Lumens (5000K)	LPW (5000K)
45W	120-277VAC	70	6350lm	141 lm/W	6400lm	142 lm/W
70W	120-277VAC	70	9500lm	136 lm/W	9600lm	137 lm/W

Dimensions and specifications subject to change without notice.

