



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS



This LED industrial high bay is perfect for warehouse lighting. Premium designed reflectors provide efficient lighting and maximum throw for medium to high mount applications. The HBIA LED is built tough for industrial applications.

### FEATURES & BENEFITS



- Designed for surface, pendant, stem, or chain hanging
- Mounting holes provided for simple, fast installation
- Galvanized steel body
- Multiple KOs and access plate on back for rapid wiring
- cETL<sub>us</sub> listed

### DIMENSIONS

#### 24in Dimensions

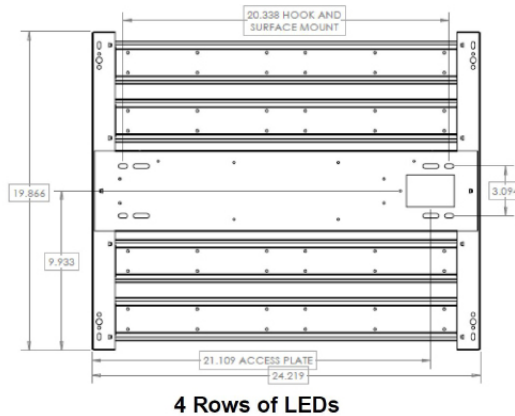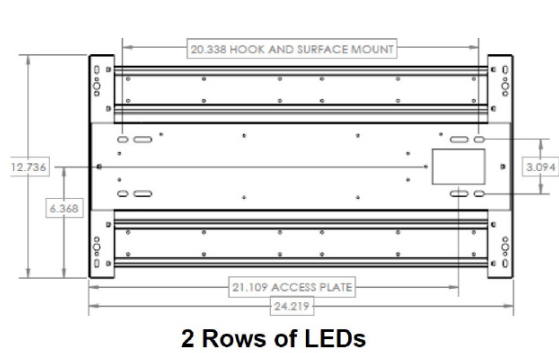

#### 48in Dimensions

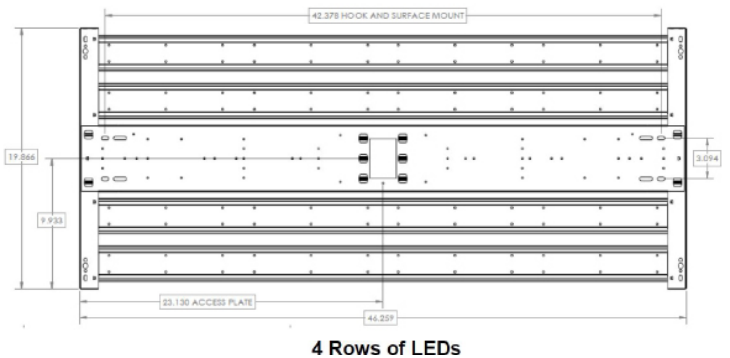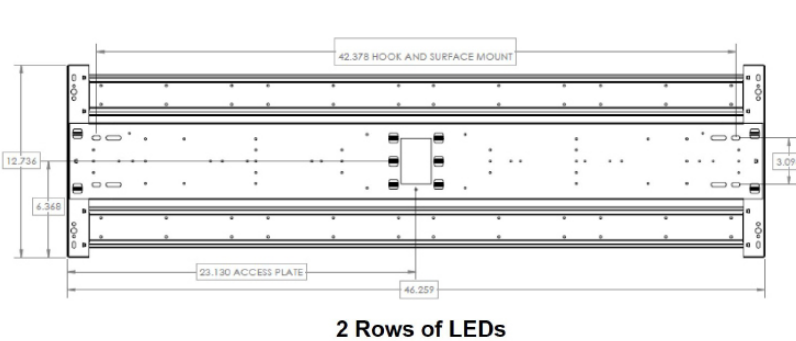

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: HBIA 48 LED 75 DMV 30 EM OS CS WG

HBIA		LED					
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS	7. COLOR TEMP	
HBIA LED Industrial High Bay Open Frame	48 48" nominal length	LED	<b>24 in 2 Rows</b>		DMV 120-277V Multivolt 0-10V Dimmable DHV 347-480VAC 0-10V Dimming	Blank No lens FR Door Frame Frosted Smooth Acrylic	30 3000K
			75 75 Watts 10500 Lumens	35 3500K			
	24 24" nominal length		<b>24 in 4 Rows</b>				40 4000K
			89 89 Watts 12000 Lumens	50 5000K			
			132 132 Watts 19000 Lumens				
			<b>48 in 2 Rows</b>				104 104 Watts 15000 Lumens
			132 132 Watts 19000 Lumens				
			<b>48 in 4 Rows</b>				175 175 Watts 24000 Lumens
			215 215 Watts 32000 Lumens				
			280 280 Watts 40000 Lumens				
			355 355 Watts 49000 Lumens				

8. EM (O) <sup>1</sup>	9. SENSOR(O) <sup>1</sup>	10. CORD(O) <sup>1</sup>	11. WIREGUARD(O) <sup>1</sup>
EM 10 Watts, 1600 Lumens, Battery Backup	OS Occupancy Sensor OSD Occupancy Sensor - 0-10V Dimmable SS Occupancy Sensor - Internal Microwave DH Daylight Harvesting	CS 6' Cord 18/3 CS8 8' Cord 18/3 CS12 12' Cord 18/3 CS8TL277 8' Cordset 277V, 3-WIRE, NEMA L7-15P WP 6' Whip-MC WP12 12' Whip-MC	WG Wraparound Wire Guard Photocell 277V

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

**NOTES:**

<sup>1</sup>O is optional

Dimensions and specifications subject to change without notice.

