

JOB NAME:

CAT#:

TYPE:

## APPLICATIONS

Full body micro silhouette makes a bold statement with a minimal design in post painted matte white finish (consult factory for other finishes). Scaled to the LED module the frosted diffuser surrounds the LEDs for a soft lighting. Fixture can be surface mounted on the wall or ceiling or pendant mounted with specially engineered cable mounting kit.


## FEATURES & BENEFITS

- Housing is formed and welded 22 gauge steel, that is chemically treated and powder coated for a beautiful finish and to resist corrosion
- Can be mounted individually or in a continuous row
- Ribbed frosted lens is standard
- Knockouts on back and ends accept standard electrical fittings (by others). Consult factory.
- Surface mountable to a wall or ceiling
- Pendant or cable mountable
- Whips, fuses and cord sets. See options page in Buyers' Guide or contact the factory for more.
- $cETL_{US}$  listed for damp locations



## DIMENSIONS

- 3.93"H x 3.79"W x 24"L
- 3.93"H x 3.79"W x 48"L
- 3.93"H x 3.79"W x 96"L

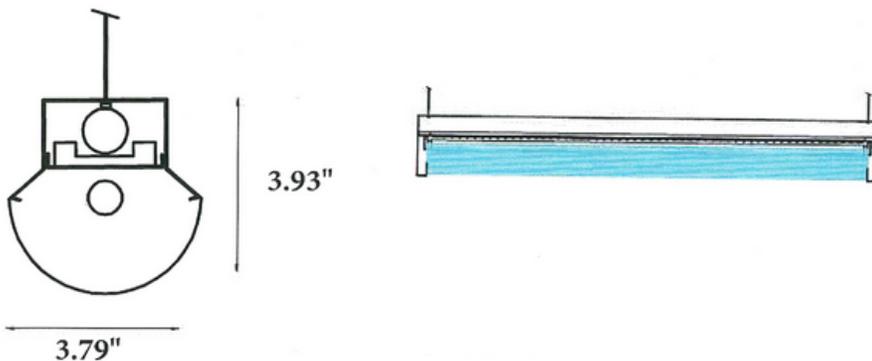

Dimensions and specifications subject to change without notice.



**JOB NAME:**
**CAT#:**
**TYPE:**
**ORDERING**

EXAMPLE: LDA 24 LED 12 DMV WH RF 30 EM OS H4W

LDA		LED			RF		
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER	7. LENS	
LDA	24 24" 48 48" 96 96"	LED	<b>24 Only</b> <b>14</b> 14 Watts 1860 Lumens <b>18</b> 18 Watts 2220 Lumens <b>21</b> 21 Watts 2530 Lumens <b>48 Only</b> <b>24</b> 24 Watts 3190 Lumens <b>28</b> 28 Watts 3720 Lumens <b>30</b> 30 Watts 3985 Lumens <b>36</b> 36 Watts 4440 Lumens <b>40</b> 40 Watts 4820 Lumens <b>42</b> 42 Watts 5060 Lumens <b>96 Only</b> <b>48</b> 48 Watts 6460 Lumens <b>56</b> 56 Watts 7540 Lumens <b>60</b> 60 Watts 8080 Lumens <b>72</b> 72 Watts 9370 Lumens <b>80</b> 80 Watts 10520 Lumens <b>84</b> 80 Watts 11050 Lumens		<b>DMV</b> 120-277V Multivolt 0-10V Dimmable <b>SDMV</b> Step dimming 120-277V Multivolt <b>D347V</b> 347VAC 0-10V Dimming <b>D120</b> Triac Dimming 120VAC <b>D277</b> Triac Dimming 277VAC	<b>WH</b> White (std) <b>BK</b> Black <b>SL</b> Silver <b>RD</b> Red <b>BN</b> Brushed Nickel	<b>RF</b> Ribbed Frosted

8. COLOR TEMP	9. EMERGENCY(O) <sup>1</sup>	10. SENSOR(O) <sup>1</sup>	11. HANGING KIT(O) <sup>1</sup>	12. PLUG IN OPTIONS(O) <sup>1</sup>
<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>EM</b> Emergency battery pack 10W~1300 Lumens (4ft. 8ft. only)	<b>OS</b> Occupancy Sensor <b>SS</b> Integral On/Off PIR Sensor <b>SSD</b> Integral Dimming PIR Sensor w/ Daylighting <b>SSM</b> Integral Microwave Sensor	<b>H4W</b> HC301 Cable kit with 4' cable & power feed Cable incl. w/ white canopy and cord <b>H4W5</b> HC301 Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy and cord (5 wire) <b>H12W</b> HC302 Cable kit with 12' cable & power feed Cable incl. w/ white canopy and cord <b>H12W5</b> HC302 Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy and cord (5 wire)	<b>PI1</b> 3 wire harness, including white, black and green <b>PI2</b> 4 wire harness, including white, black, green and blue for emergency backup <b>PI3D</b> 5 wire harness, including white, black, green, violet and gray

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage**	Amps (TL Only)**
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL** - Twist Lock	BK - Black WH - White	(Blank) 120-277V <sup>2</sup> 120 - 120V* 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

**ACCESSORIES**

Lumens are subject to a tolerance of  $\pm 10\%$  and not relevant to RGB  
 Input wattage can vary depending on options  
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.

**NOTES:**

- <sup>1</sup>O is optional  
<sup>2</sup>Not available with P or TL





JOB NAME:

CAT#:

TYPE:

**DLC INFORMATION**

DLC Listed	
LDA48LED28DMVWHRFxx	xx= Color Temp 30, 35, 40, 50
LDA48LED36DMVWHRFxx	xx= Color Temp 30, 35, 40, 50
LDA48LED42DMVWHRFxx	xx= Color Temp 30, 35, 40, 50
LDA96LED56DMVWHRFxx	xx= Color Temp 30, 35, 40, 50
LDA96LED72DMVWHRFxx	xx= Color Temp 30, 35, 40, 50
LDA96LED84DMVWHRFxx	xx= Color Temp 30, 35, 40, 50



Dimensions and specifications subject to change without notice.