



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This outdoor wet location fixture provides maintenance-free and bug free illumination for residential or commercial applications such as breezeways, entranceways and covered living areas. Engineered for durability and versatility in ceiling/canopy or wall/wall pack types of applications. Simple, sleek design provides a complimentary style and rugged polycarbonate lens make it the ideal solution in many applications.

FEATURES & BENEFITS

- Wall or ceiling mount
- White polycarbonate lens
- Min CRI 80
- $L_{70} > 50,000$ hrs.
- Enclosed and gasketed
- Powder coated cast aluminum
- IP65 rated
- $cETL_{us}$ listed for damp location
- 5 year warranty on LED models


Open



Eyelid



DIMENSIONS

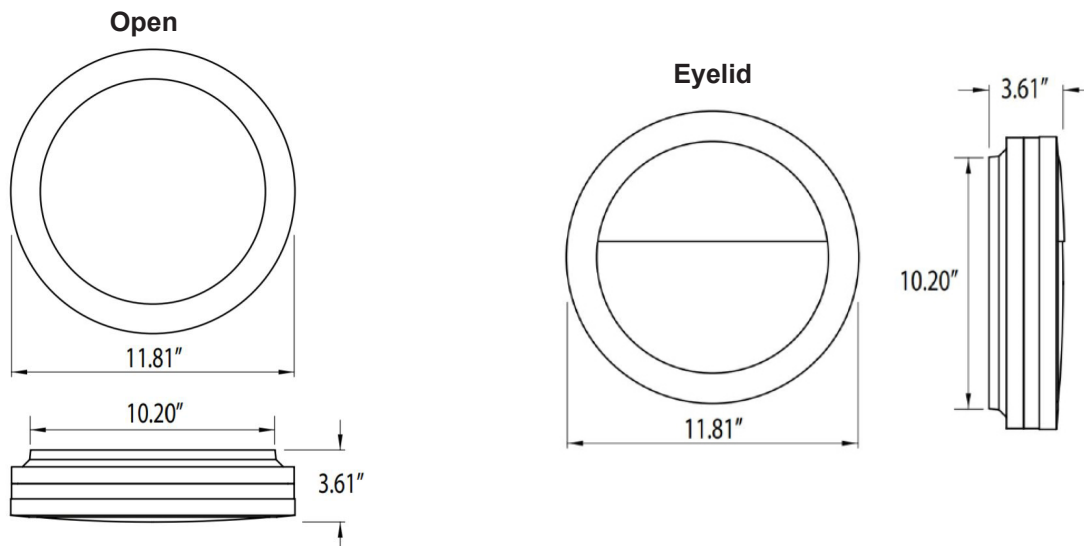

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: FL371 LE1200 W W EB

W

1. STYLE	2. LIGHT SOURCE	3. CCT- 80CRI	4. BODY	5. DIFFUSER	6. EMERGENCY (O) ^{1,2}	7. SENSOR (O) ^{1,2}
FL371 Open Face	LE1200 14W, 80 CRI 120VAC Triac Dimmable	W 3000K 1430Lm*	W White B Black	W White Polycarbonate	EB Emergency Backup ³	M Motion Sensor
FL372 Eyelid	LE1800 22W, 80 CRI 120VAC Triac Dimmable	C 4000K 1500Lm*				
	LE2600 32W, 80 CRI 120VAC Triac Dimmable					
	L1800 22W, CRI 74 (TYP) 120-277 VAC Non-dimmable	*Estimated from Light Source				

Notes:

¹(O) is optional

²Options not available with LE2600

³Not available with L1800

Dimensions and specifications subject to change without notice.

