

JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Introducing the Mobern PRF1-LED Premium grade enclosed and gasketed vaportight fixture. This Energy-Saving High Performance LED enclosure is ideal for both indoor and outdoor applications where dust and water resistance is required. Ideal for parking garages, cold storage, marinas, barns, canopies, car washes, poultry farms, agricultural applications and other areas susceptible to corrosive and wet conditions.

FEATURES & BENEFITS

- Single piece co-extruded lens and housing
- Lens and housing are all one piece
- Available in 2', 4', & 8' lengths



ORDERING

EXAMPLE: PRF1

WP		LED		DMV		6. FINISH	
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER			
PRF1	2 2 ft 4 4 ft 8 8 ft	LED	<u>2ft</u> 24 24 Watts 2250 Lumens <u>4ft</u> 48 48 Watts 4500 Lumens <u>8ft</u> 96 96 Watts 9000 Lumens	DMV 0-10V Dimming 120-277VAC Multivolt SDMV Step Dimming 120-277VAC 100%-40% D120 120V Dimmable D347V 347VAC 0-10V Dimmable D277 Triac Dimming 277VAC	GY Grey		
7. HOUSING MATERIAL	8. COLOR TEMP	9. SENSOR(O)¹		10. EMERGENCY(O)¹		11. CORD(O)¹	
A Acrylic	30 3000K 35 3500K 40 4000K 50 5000K	OS Occ Sensor -On/Off OSD Occ Sensor w/Dimming & Daylight Harvesting OSW Occ Sensor Wet Location OSC Occ Sensor Cold Location SS Occ Sensor Internal Microwave		EM Emergency Battery Backup		CS Cord 18/3 6"	

Notes:
 ¹O is Optional

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:


TYPE:

ACCESSORIES

- A-PRF-MB Mounting Bracket
- A-PRF-S1-SB Safety bail (order 2 per mounting bracket)
- A-PRF-AS-BLK-N ACME screw
- A-SLP-GRMT-0500 Optional wire grommet

DIMENSIONS

- 8'L x 3.86"W x 3.75"H
- 4'L x 3.86"W x 3.75"H
- 2'L x 3.86"W x 3.75"H

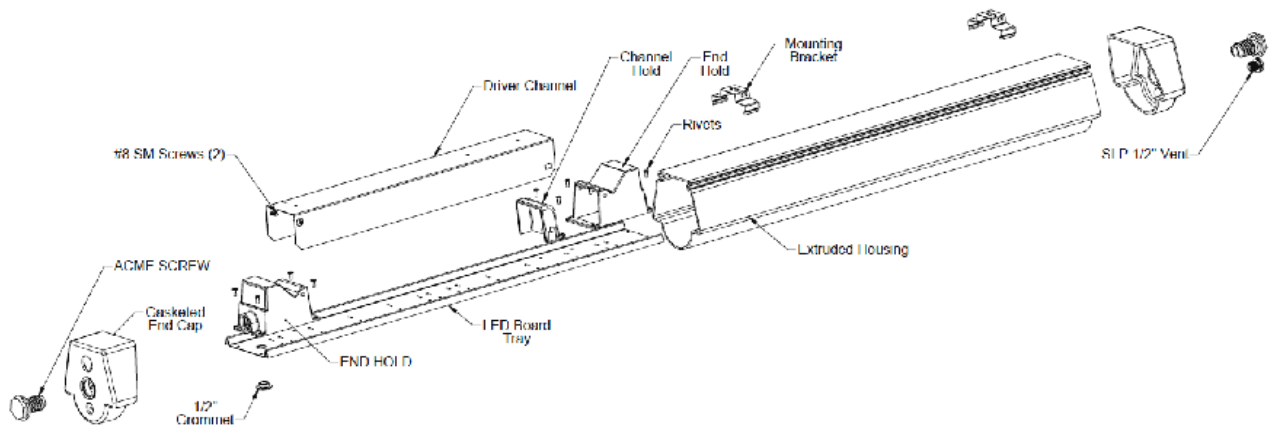

Dimensions and specifications subject to change without notice.

