



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This kit is designed to convert most recessed fluorescent 1x4, 2x2 and 2x4 troffers and parabolics to long-life and efficient LED technology. These kits provide everything required to enhance the performance and energy savings of your recessed fixture while minimizing labor, clean up and expense. Kits include high-reflectance reflector with driver, LED boards and tek screws for easy assembly. Kits install with simple hand tools in minutes.


The RKT-LED retrofit kits mount easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The driver is attached to the backside of the reflector.



FEATURES & BENEFITS

- Constant Current LED Driver
- Input Voltage: 120-277V AC
- Input Frequency: 50/60Hz
- Reflectors are precision formed and high performance
- _cETL_{US} recognized as retrofit
- DLC listed in certain models

DIMENSIONS

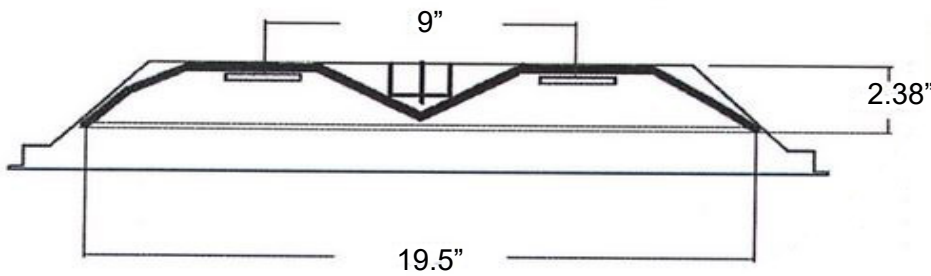

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RKT 14 LED 35 DMV 30 SS

RKT		LED												
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		7. COLOR TEMP		7. SENSOR (O) ¹					
RKT Retrofit Kit	14	1X4 Troffer Parabolic	LED	<u>Standard 1X4</u>		DMV	120-277V	30	3000K	SS	Integrated Sensor			
	22	2X2 Troffer Parabolic		35	35 Watt 4320 Lumens		Multivolt	35	3500K					
	24	2X4 Troffer Parabolic		48	48 Watt 5680 Lumens		0-10V	40	4000K					
				57	57 Watt 6500 Lumens		Dimmable	50	5000K					
				<u>Standard 2X2</u>			SDMV	Step dimming multivolt						
				20	20 Watt 2300 Lumens			D347	347VAC 0-10 Dimming					
				24	24 Watt 2800 Lumens			D120	Triac Dimming 120VAC					
				28	28 Watt 3200 Lumens			D277	Triac Dimming 277VAC					
				35	35 Watt 4100 Lumens									
				45	45 Watt 4470 Lumens									
				<u>Standard 2X4</u>										
				35	35 Watt 4320 Lumens									
		48	48 Watt 5680 Lumens											
		57	57 Watt 6500 Lumens											

*Consult for other wattages

DLC INFORMATION

DLC Listed	
RKT22-LED20DMVxx	xx=30,35,40,50
RKT22-LED24DMVxx	xx=30,35,40,50
RKT22-LED28DMVxx	xx=30,35,40,50
RKT22-LED35DMVxx	xx=30,35,40,50
RKT22-LED45DMVxx	xx=30,35,40,50
RKT24-LED35DMVxx	xx=30,35,40,50
RKT24-LED48DMVxx	xx=30,35,40,50
RKT24-LED57DMVxx	xx=30,35,40,50



Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

