



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Premium surface mounted deep cell parabolic fixture designed for maximum efficiency and visual comfort. Ideal for commercial and industrial buildings requiring general illumination with surface configurations and low glare.

Housing is die-formed from cold rolled steel. A framed parabolic troffer offering improved photometrics over our standard welded surface parabolic fixture. Finish is high reflectance P3 - Post Powder Paint. Precision formed anodized semi-specular aluminum louver. Standard nominal 3" deep cell louvers are manufactured using interlocked construction and mitred corners. Louver hinges from either side. Latches use a positive locking cam action and come with matching finish. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. A protective film is provided to protect the and fixture from construction dust.



FEATURES & BENEFITS

- Technology - Post Powder Paint
- > 90% reflectivity
- Corrosion and scratch resistant
- Smooth edges for easy handling
- Clean appearance with no exposed fasteners
- Low iridescent louver is maintenance free semi-specular anodized aluminum
- Louver hinges and latches from either side
- Black reveal provides gap free floating louver appearance
- Various cell configurations available
- Pre-lamp available
- Every fixture individually tested

Dimensions and specifications subject to change without notice.







JOB NAME:

CAT#:


TYPE:

DIMENSIONS


TOP VIEW

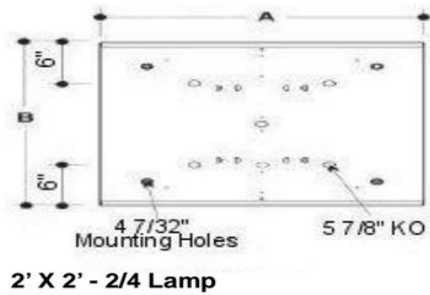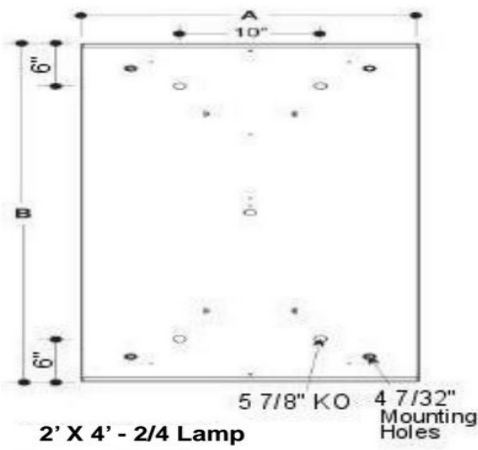

END VIEW

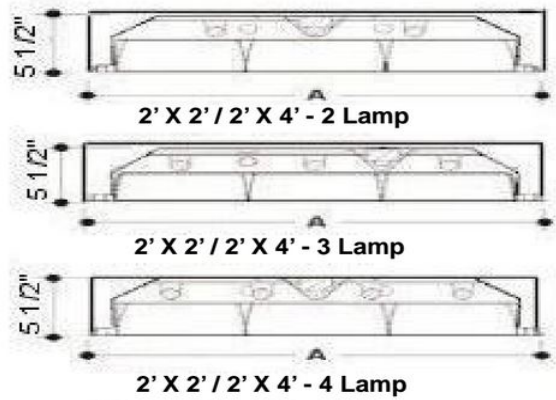

SIDE VIEW

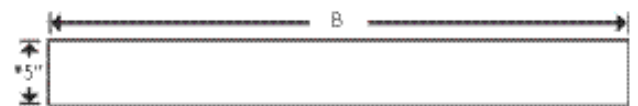

MODEL CONFIGURATION	A	B
2' x 2'	24"	24"
2' x 4'	24"	48"

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SPR 14 8 LED 24 DMV 30 EM

SPR		LED					
1. SERIES	2. SIZE	3. # OF CELLS	4. GEAR	5. WATTAGE	6. DRIVER	7. COLOR TEMP	
SPR	14 1X4	8 8 cell (STD 1x4)	LED	<u>2x2</u>		DMV Dimmable Driver	30 3000K
	22 2X2	9 9 cell (STD 2x2)		24 24W 2725 Lumens	35 3500K		
	24 2X4	12 12 cell (2x4)		30 30W 3300 Lumens	40 4000K		
		16 16 cell (2x2)		47 47W 4330 Lumens	50 5000K		
	18 18 cell (STD 2x4)	<u>1x4</u>					
	24 24 cell (2x4)	32 32W 3600 Lumens					
	32 32 cell (2x4)	48 48W 5450 Lumens					
				<u>2x4</u>			
				48 48W 5450 Lumens			
				60 60W 6600 Lumens			
		85 85W 8675 Lumens					

8. EMERGENCY (O)¹

- EM** Emergency Battery Backup
- EM5** Emergency Battery pack 5W ~650 Lumens

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

